



# ITEM# 126019 (21262-8)

244-07/15/11

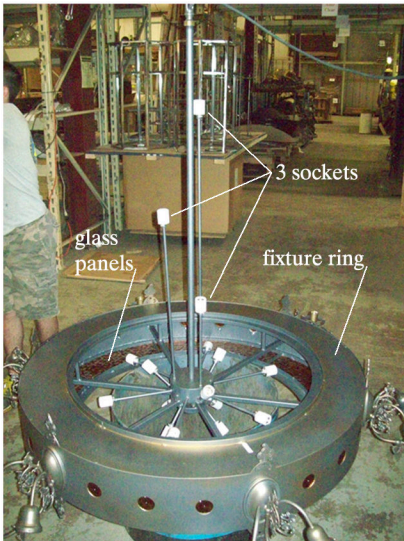

PLACE FIXTURE RING ONTO BARREL OR SAW HORSES  
CAREFUL PLACE GLASS PANELS  
INTO BOTTOM OF FIXTURE RING  
(MAKE SURE FLAT SIDE OF GLASS  
FACES DOWN)  
PLACE LIGHT BULBS INTO (3)  
SOCKETS

THIS FIXTURE WEIGHS OVER 50 LBS.  
NEC:314.27B, A luminaire that weighs  
more than 23kg (50lb) shall be supported  
independently of the outlet box unless the  
outlet box is listed AND MARKED for  
the MAXIMUM weight to be supported.

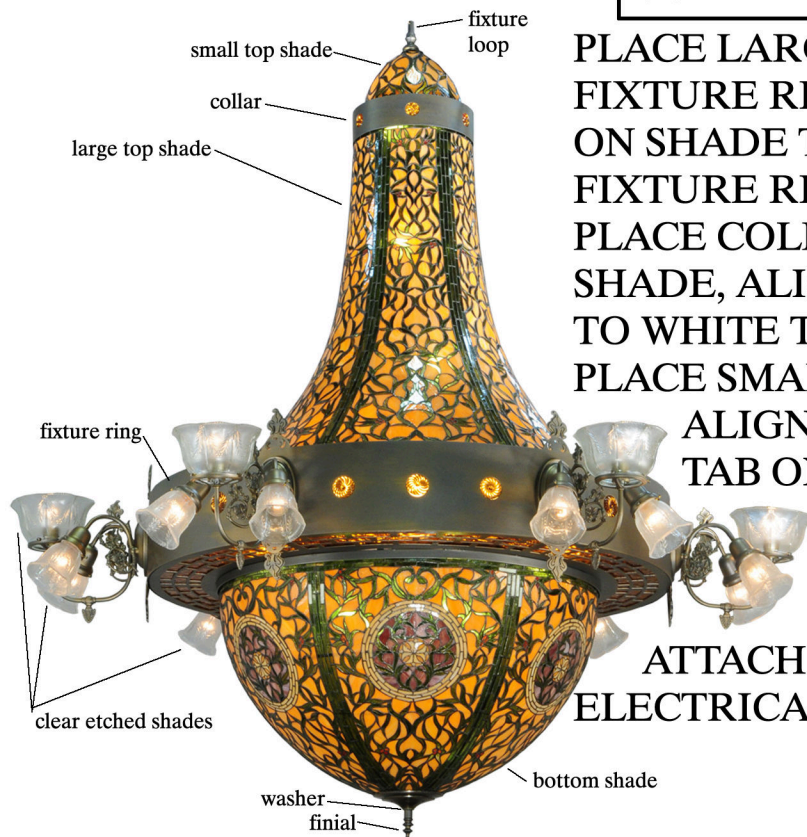

PLACE LARGE TOP SHADE ONTO  
FIXTURE RING, ALIGN WHITE TAB  
ON SHADE TO WHITE TAB ON  
FIXTURE RING.


PLACE COLLAR ONTO LARGE TOP  
SHADE, ALIGN WHITE TAB ON COLLAR  
TO WHITE TAB ON SHADE.

PLACE SMALL TOP SHADE ONTO COLLAR,  
ALIGN WHITE TAB ON SHADE TO WHITE  
TAB ON COLLAR.

SCREW FIXTURE LOOP NUT ONTO  
FIXTURE LOOP AND TIGHTEN TO  
SHADE

ATTACH SHADE AND WIRE AS PER LOCAL  
ELECTRICAL CODE

BULB REMAINING SOCKETS. REMOVE SMALL THREADED ROD FORM HUB AND

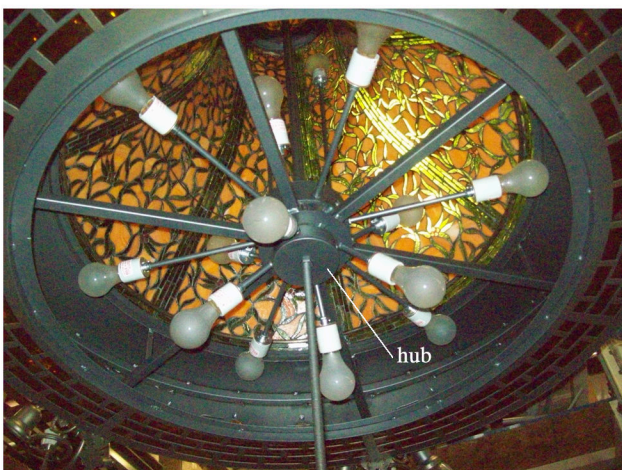

REPLACE WITH LONG THREADED ROD.  
PLACE BOTTOM SHADE ONTO LONG  
THREADED ROD AND SEAT TO BOTTOM  
FIXTURE RING. SECURE WITH WASHER AND  
FINIAL (ALIGN WHITE TAB ON SHADE TO  
WHITE TAB ON FIXTURE RING).  
PLACE (16) CLEAR ETCHED SHADES INTO  
SHADE HOLDERS AND SECURE WITH THUMB  
SCREWS. BULB ALL SOCKETS.