


# ASSEMBLY INSTRUCTIONS FOR #54048-2(128528)

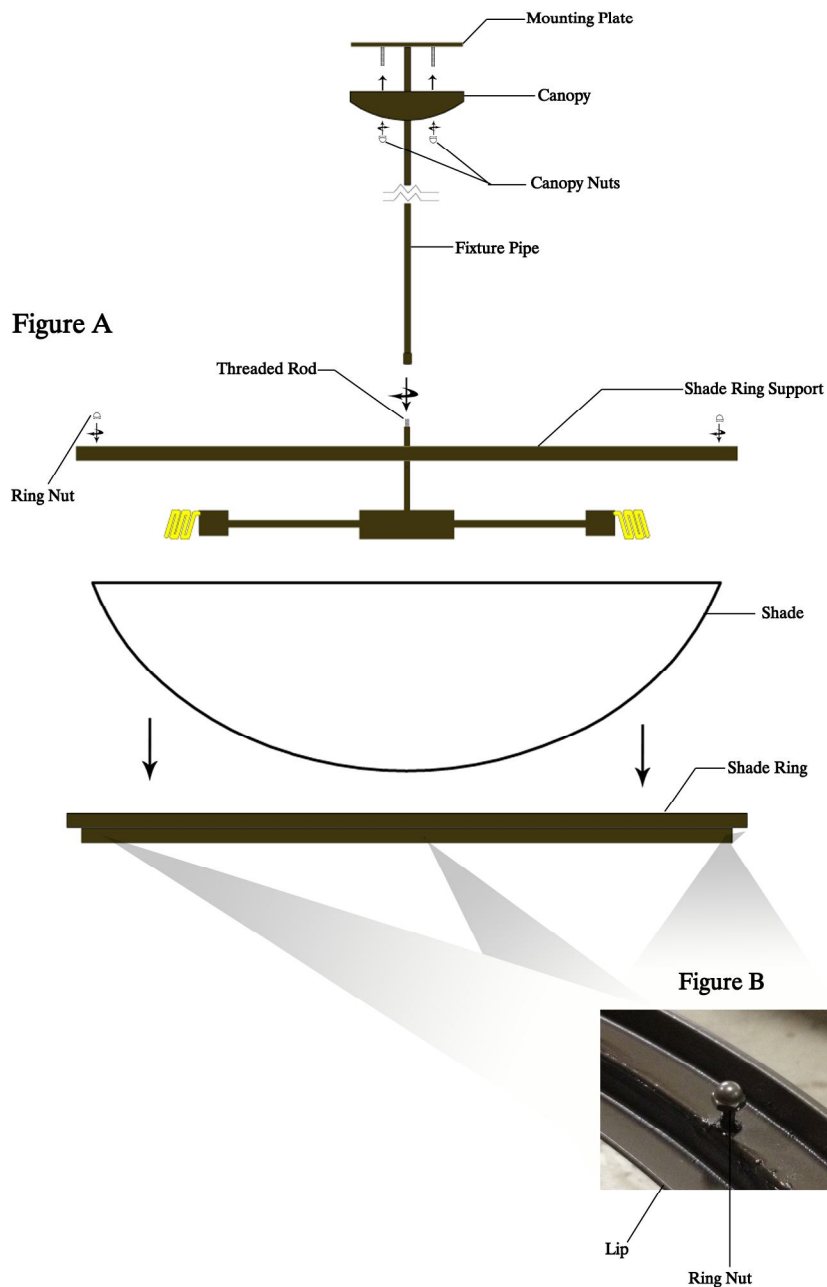

## IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

### **\*THIS IS A TWO PERSON JOB\***

**THIS FIXTURE WEIGHS OVER 50 LBS. NEC:314.27B, A luminaire that weighs more than 23kg (50lb) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM weight to be supported.**

- 1.) Feed wire through fixture pipe and attach fixture pipe to shade ring support(Fig.A).
- 2.) Wire per local electrical code.
- 3.) Attach mounting plate to a secure location.
- 4.) Slide canopy up fixture pipe and attach with canopy nuts (2).
- 5.) Carefully place shade into shade ring so that it rests on lip(Fig.B).
- 6.) Attach ring fixture to cross support fixture using the ring nuts (4).



*"A Commitment to Excellence in Lighting and Service"*

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET

visit us on the web at [www.meyda.com](http://www.meyda.com)