


ASSEMBLY INSTRUCTIONS FOR #129887 (47110-144)

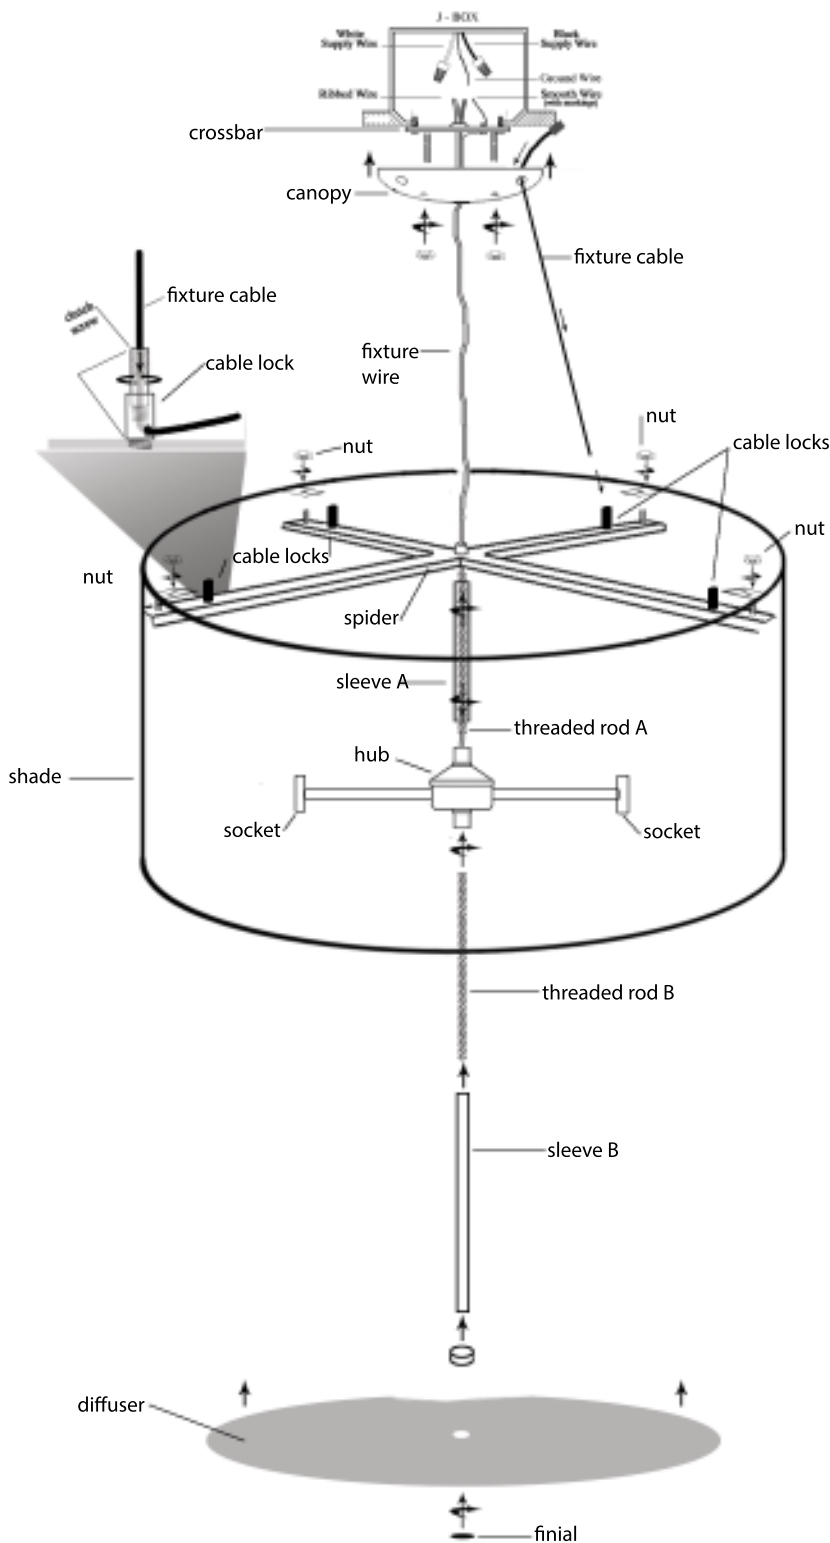

IMPORTANT
TURN OFF THE POWER AT THE MAIN
FUSE OR CIRCUIT BREAKER BOX
BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL
PARTS BEFORE ASSEMBLY. BULBS ARE
NOT INCLUDED

1. Attach crossbar to jbox.
2. Place fixture wire from hub through threaded rod A and sleeve A through spider.
3. Screw threaded rod A with sleeve A into bottom of spider and top of hub.
4. Screw threaded rod B with sleeve B into bottom of hub.
5. Place fixture cables down through canopy and into cable locks.
6. Place fixture wire up through canopy.
7. Wire as per local electrical code.
8. Attach canopy to crossbar.
9. Adjust shade height by pulling fixture cables through cable locks (to release fixture cable push down on clutch screw, when clutch is released fixture wire is locked in position).
10. Place light bulbs into sockets, place shade onto spider screws and attach w/nuts.
11. Place diffuser up onto threaded rod B, secure with finial.



"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET

visit us on the web at www.meyda.com