


# ASSEMBLY INSTRUCTIONS FOR #130417 (35613-25B)

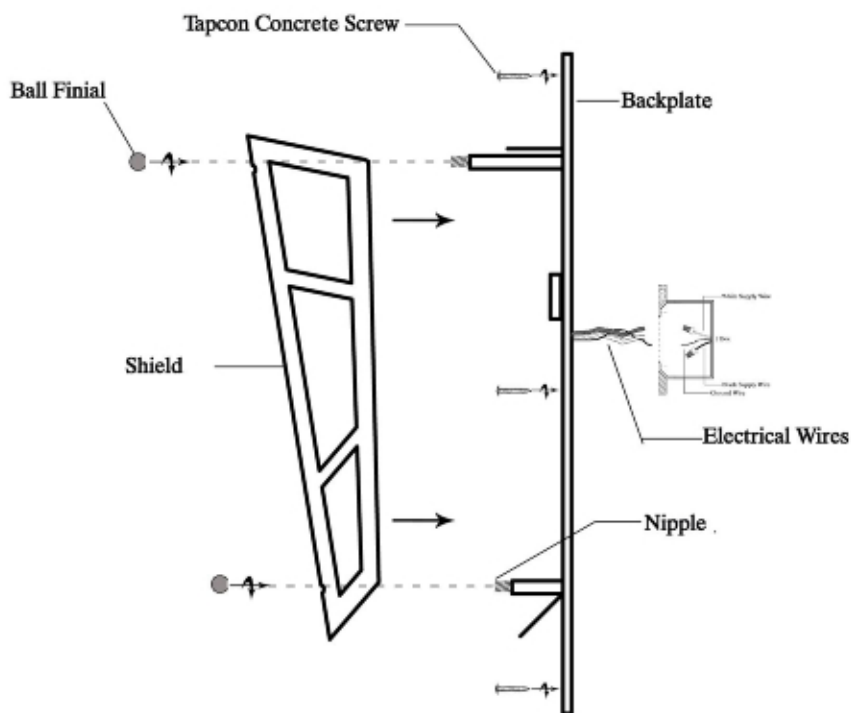

## IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

1.) Wire backplate to J-box as per local electrical code.

\*Note: The red wire is the line, the black wire is neutral, and the yellow wire is the ground.\*

2.) Secure backplate to wall using Tapcon concrete screws (6), provided.

3.) Place shield onto backplate and secure with ball finials.



*"A Commitment to Excellence in Lighting and Service"*

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET

visit us on the web at [www.meyda.com](http://www.meyda.com)