

FIG.A

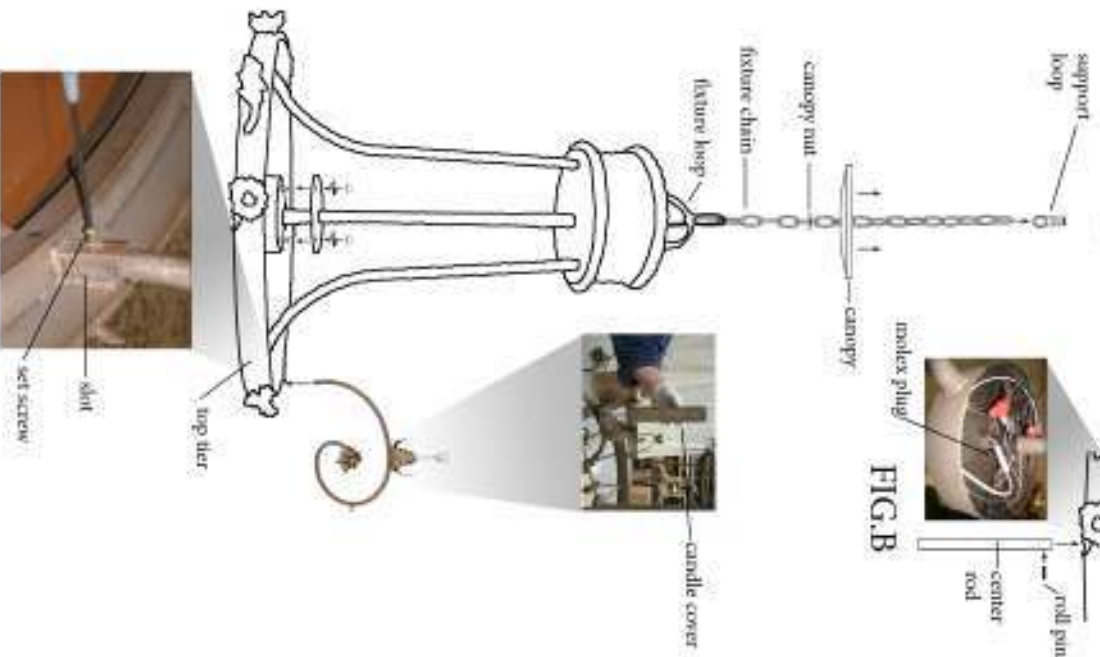


FIG.B




FIG.C

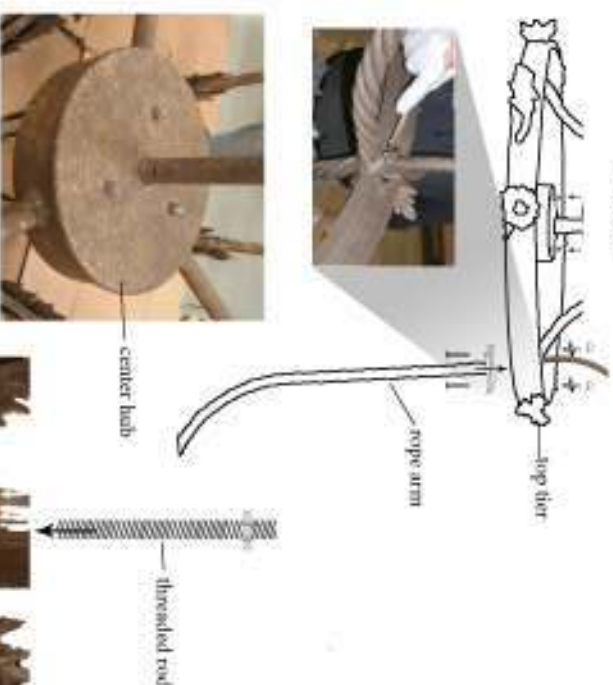


FIG.D



"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET

visit us on the web at www.meyda.com

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

Fixture lift must be rated for over 600 LB capacity.

We have included 3 different sized support loops.

1. Choose support loop that is most compatible for your lift.
2. Attach support loop to lift. Attach fixture chain to fixture loop. Place canopy nut then canopy onto fixture chain, attach fixture chain to support loop. Fig. A

Wire as per local electrical code

3. Attach mox plug from top tier arms to mox plug located in top tier. Insert top tier (small) arms into slot and secure with set screw. Fig. A
4. Place center rod up through center hub and secure with roll pin. Attach center arm mox plug to center hub mox connector. Slide cover down onto center hub and secure with short bolts and acorn nuts. Fig.B
5. Place candle covers onto uno sockets, place shades onto uno sockets and attach with uno ring. Place (long) crystal string onto fixture.



ASSEM
