
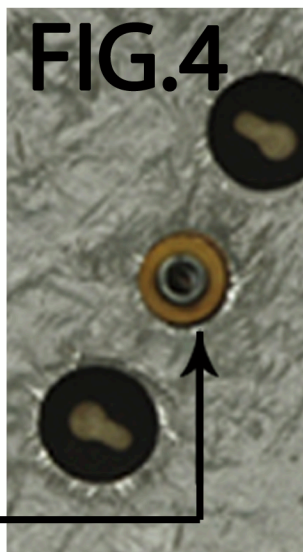
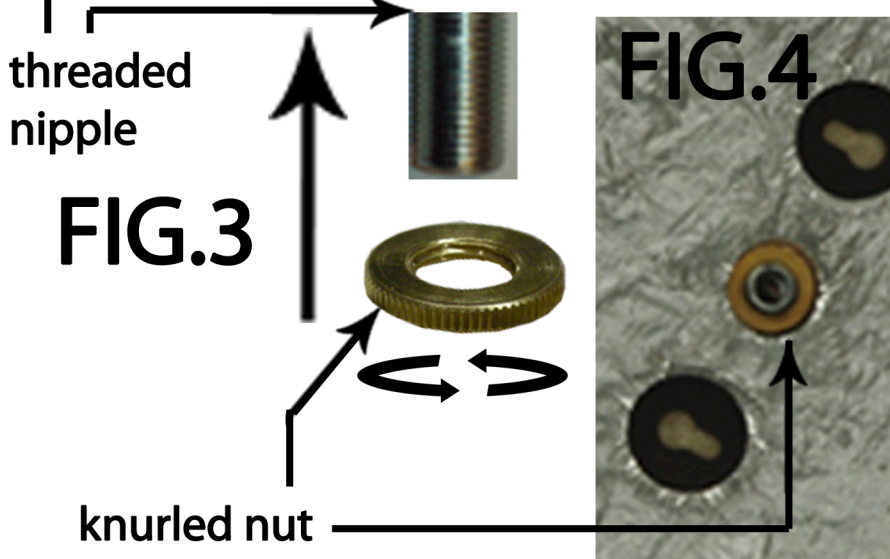
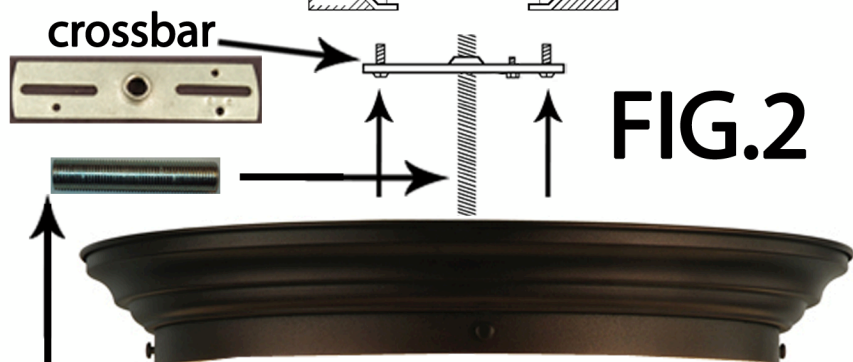


ASSEMBLY INSTRUCTIONS FOR # 130633

FIG.1

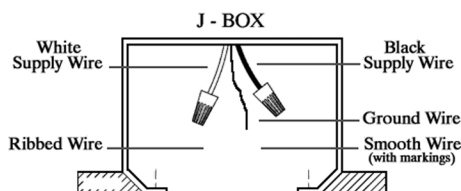

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

1. Attach crossbar to j-box (FIG.1)
2. Screw threaded nipple into crossbar. (FIG.2)
3. Attach wires as per local codes. Do not let fixture hang by the wires!!
4. Slide fixture onto threaded nipple through the center of canopy. (FIG.3)
5. Screw knurled nut onto threaded nipple keeping fixture fixed to the ceiling. should look like FIG.4
6. After placing bulbs, insert shade into canopy and while holding shade in canopy, screw knurled thumb screws all the way until shade is held in place.(FIG.5)



"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET

visit us on the web at www.meyda.com