
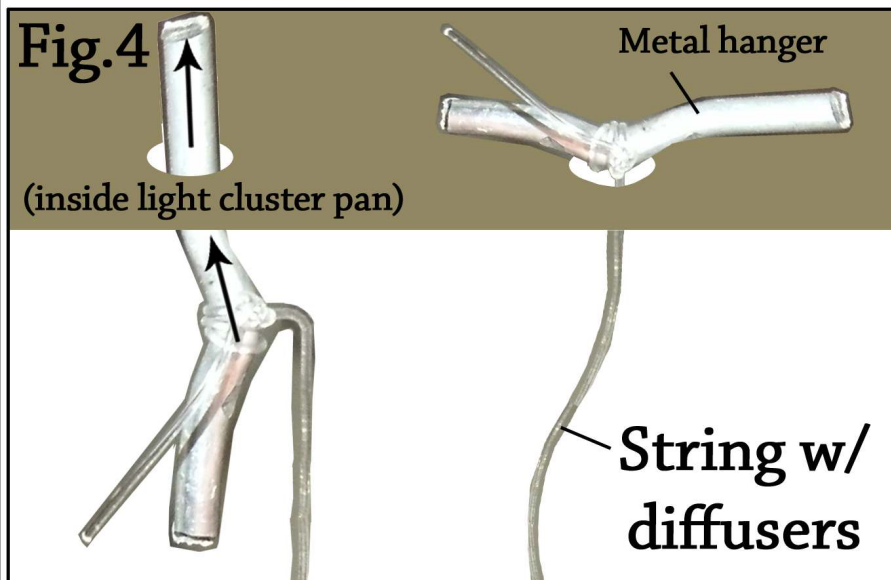
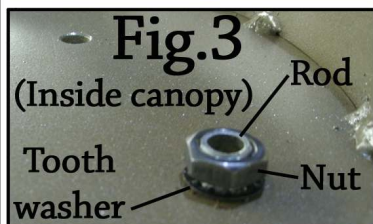
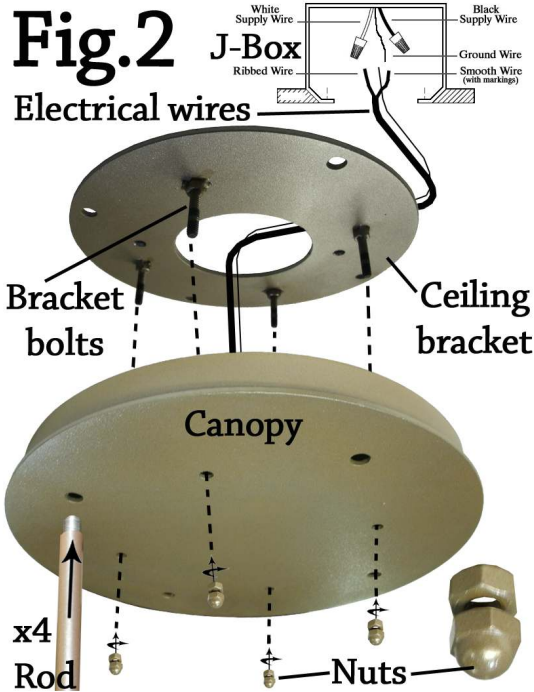


ASSEMBLY INSTRUCTIONS FOR # 134925

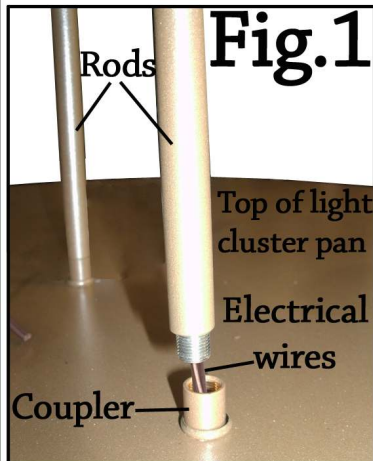


THIS FIXTURE WEIGHS OVER 50 LBS. NEC:314.27B, A luminaire that weighs more than 23kg (50lb) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM weight to be supported.

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

- 1.) Attach ceiling bracket to ceiling.(Fig.2)
- 2.) You will have four couplers on top of your light pan, one of which has electrical wires coming out of it. Run your electrical wires through one of the rods. Screw this rod and the rest of your rods into the couplers.(Fig.1)
- 3.) Place your canopy onto the four rods,(Fig.2) your rods will be poking through the canopy. Secure the canopy to the rods: Put a tooth washer onto the top of the rods, screw nuts onto the rods.(Fig.3)
- 4.) Bring canopy with fixture now attached to your ceiling. Connect all electrical wires as per your local codes. Slide canopy up onto the bracket bolts. Secure in place and flush to the ceiling with nuts provided.(Fig.2)
- 5.) Bulb your fixture (provided by others).
- 6.) Place strings of diffuse: Hold metal hanger parallel with string. Send metal hanger through the small holes in the underside of light cluster pan. Once through, hold the string and let metal hanger rest on the inside of light cluster pan.(Fig.4)
- 7.) Power on, enjoy your new fixture!



"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00a.m - 6:00p.m ET

visit us on the web at www.meyda.com