
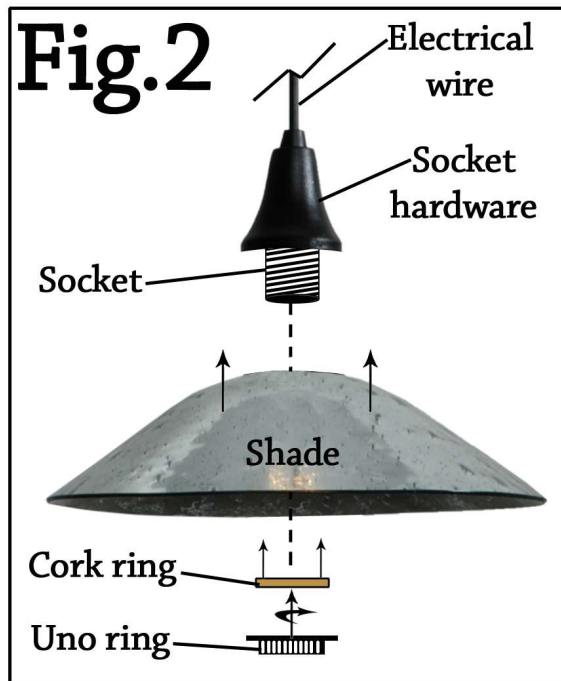


ASSEMBLY INSTRUCTIONS FOR # 137830

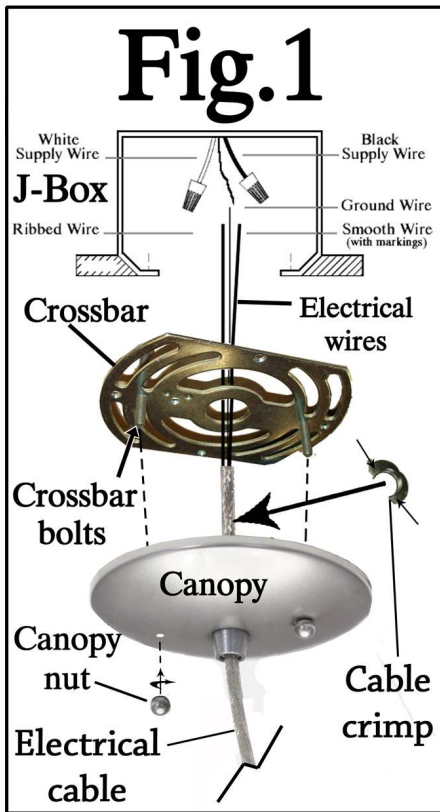


IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

- 1.) Attach crossbar to ceiling/J-Box, be sure there is two bolts pointing down, from crossbar, ready to receive the canopy.
- 2.) Run your cable through the canopy, & determine the length of electrical cable needed. Above the canopy, squeeze a cable crimp onto the cable when sure of height.
- 3.) Bring fixture to ceiling/J-Box, and connect all electrical wires as per your local codes.
- 4.) Slide canopy up onto the crossbar bolts and secure flush to ceiling by screwing the two canopy nuts onto the bolts.
- 5.) Slide shade up onto the socket, place cork ring (on socket), & screw the uno ring up onto the socket.
- 6.) Bulb your fixture (Bulbs provided by others), power on, enjoy your new fixture!

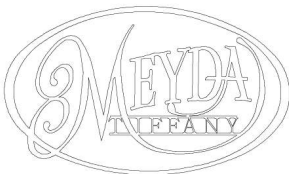

"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00a.m - 6:00p.m ET

visit us on the web at www.meyda.com