



ASSEMBLY INSTRUCTIONS FOR #138102 (JS6812-16-1-LJB20-1)


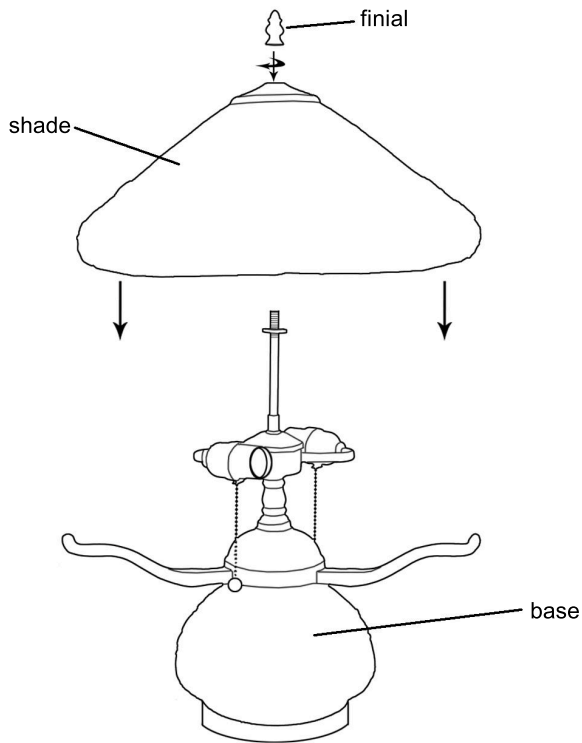


IMPORTANT
TURN OFF THE POWER AT THE MAIN
FUSE OR CIRCUIT BREAKER BOX
BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL
PARTS BEFORE ASSEMBLY. BULBS ARE
NOT INCLUDED

1. Place shade onto threaded rod
and attach with finial.

-  To change light bulb in base,
- Carefully remove felt from bottom of base.
 - Remove screws (2) located on bottom plate (under felt).
 - Remove bulb from socket, replace with new 15 W bulb.
 - Reattach screws (2) and tighten.
 - Reattach felt.

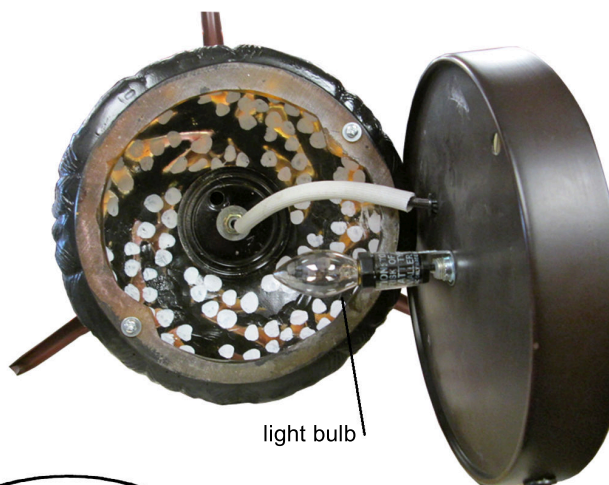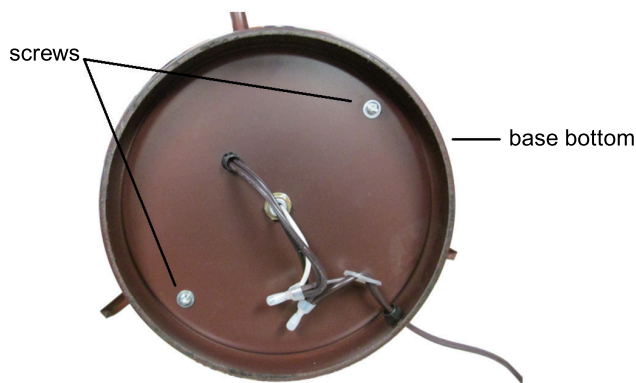

"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET

visit us on the web at www.meyda.com

