


# ASSEMBLY INSTRUCTIONS FOR #139279

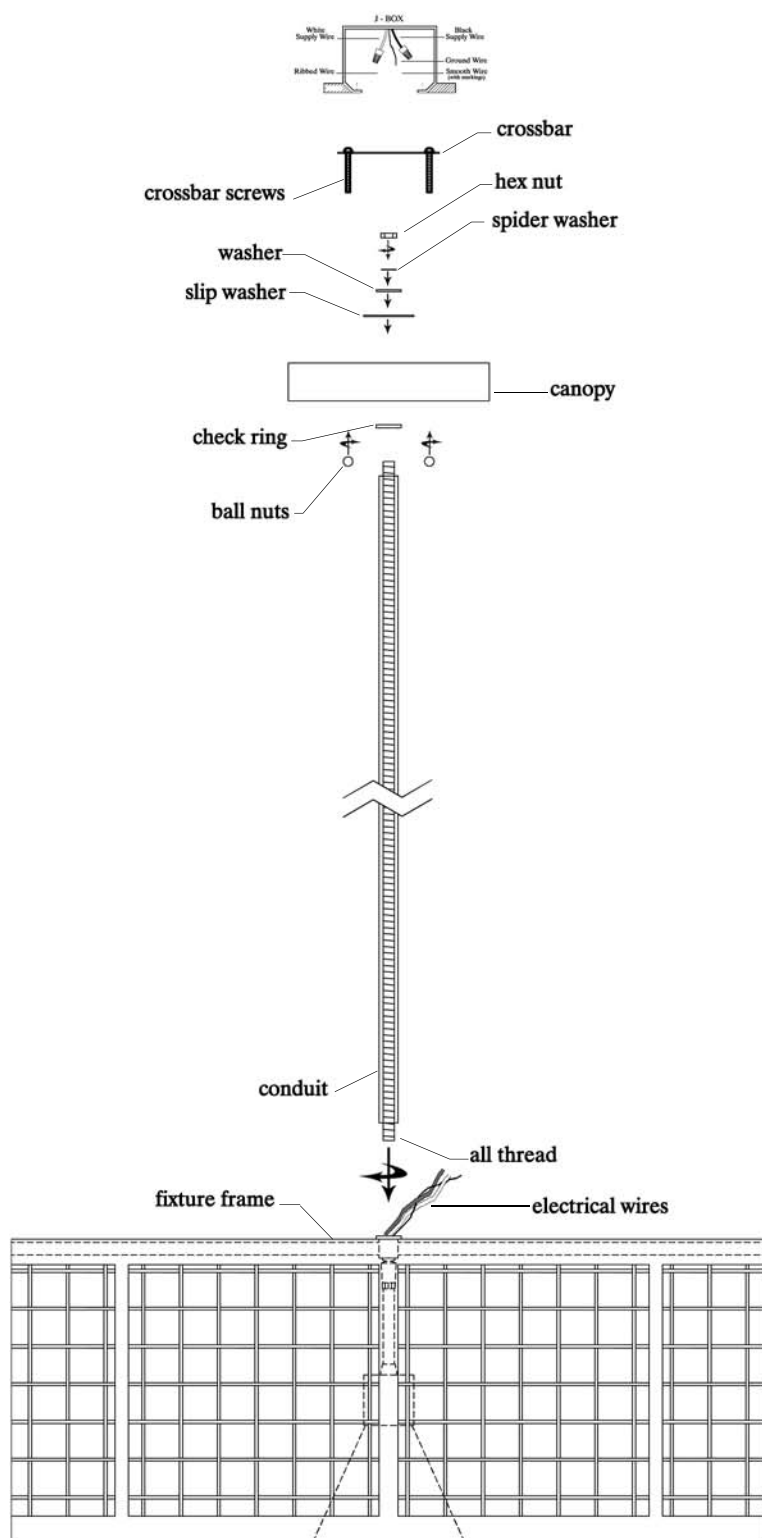

## IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

- 1.) Attach crossbar to j-box using customer provided screws.
- 2.) Feed electrical wires up all thread and screw all thread, with conduit attached, into fixture frame as shown.
- 3.) Place check ring on top of conduit.
- 4.) Insert all thread into canopy, place slip washer, washer, then spider washer onto all thread and secure with hex nut.
- 5.) Raise up fixture to crossbar and wire as per local electrical codes.
- 6.) Attach canopy to crossbar screws and secure with ball nuts.



*"A Commitment to Excellence in Lighting and Service"*

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET

visit us on the web at [www.meyda.com](http://www.meyda.com)