


ASSEMBLY INSTRUCTIONS FOR #139586

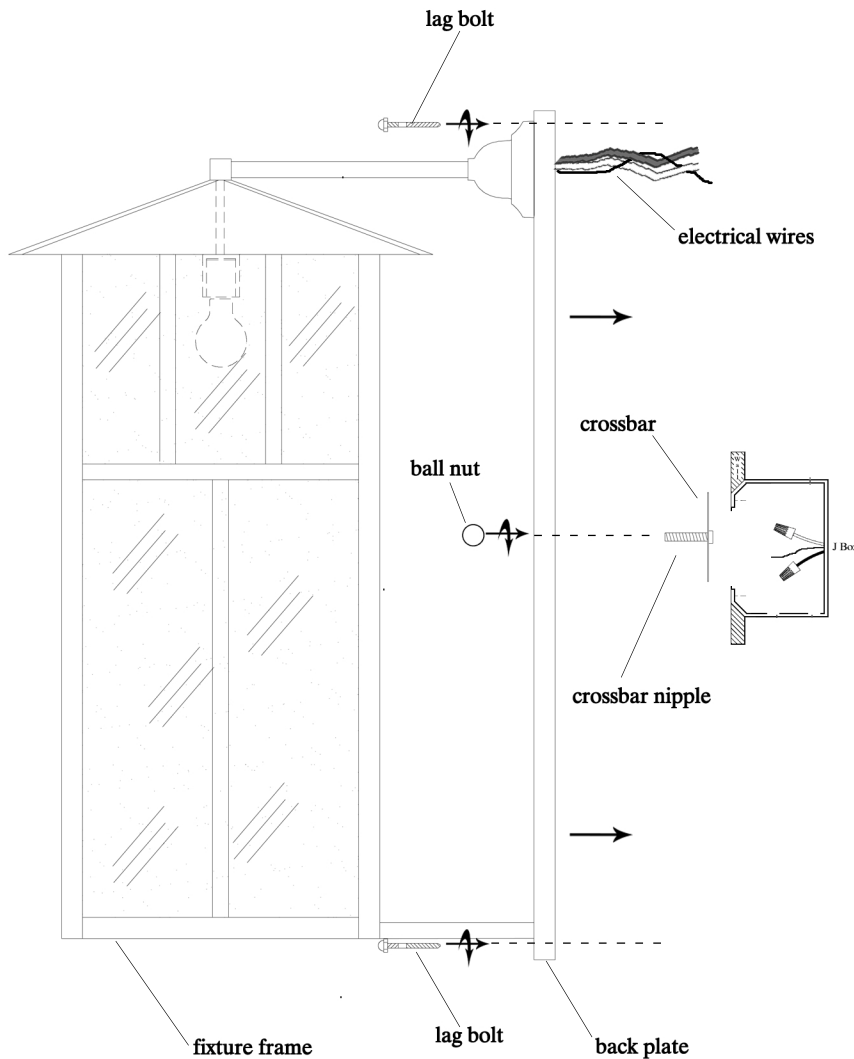

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

THIS IS A TWO PERSON JOB

- 1.) Attach crossbar to j-box using customer supplied screws.
- 2.) One person hold up fixture while the other wires as local electrical codes.
- 3.) Align back plate to wall so that crossbar nipple sticks through center of back plate.
- 4.) Hold up fixture to wall and mount to a secure location using the four lag bolts.
- 5.) Once fixture is secure to wall, tighten ball nut onto crossbar nipple.

Note: Both the fixture frame and glass panels are labelled for installation.



"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET

visit us on the web at www.meyda.com