
ASSEMBLY INSTRUCTIONS FOR #140004

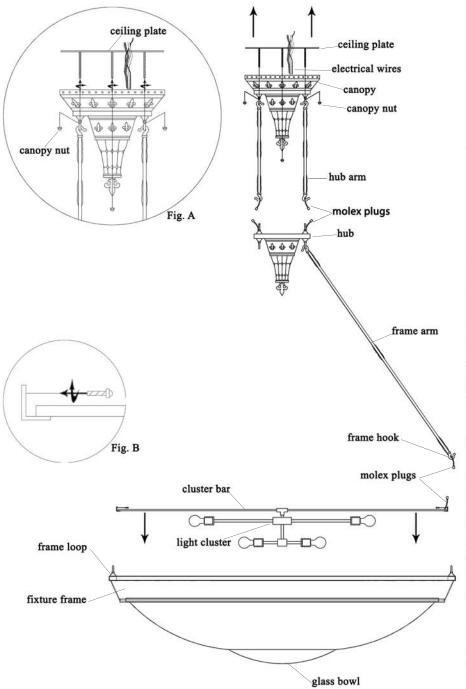

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

THIS FIXTURE WEIGHS OVER 50 LBS. NEC:314.27B, A luminaire that weighs more than 23kg (50lb) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM weight to be supported.

- 1.) Mount ceiling plate to a secure location.
- 2.) Raise up canopy and wire as per local electrical codes.
- 3.) Attach canopy to ceiling plate and secure with canopy nuts provided. Fig. A
- 4.) Attach remaining hub arms.
- 5.) Connect molex plugs from hub arms to molex plugs on hub.
- 6.) Attach all but 3 frame arms to hub and fixture frame.
- 7.) Carefully place glass bowl into fixture frame.
- 8.) Install light bulbs into light cluster and place cluster bar into fixture frame. (There are LED candelabra bulbs pre-installed into the lit hub and canopy sections)
- 9.) Attach cluster bar to inside of fixture frame using bar screws. Fig B.
- 10.) Attach remaining frame arms.
- 11.) Connect molex plugs from fixture arm to molex plugs on cluster bar.



"A Commitment to Excellence in Lighting and Service"