


# ASSEMBLY INSTRUCTIONS FOR # 141534

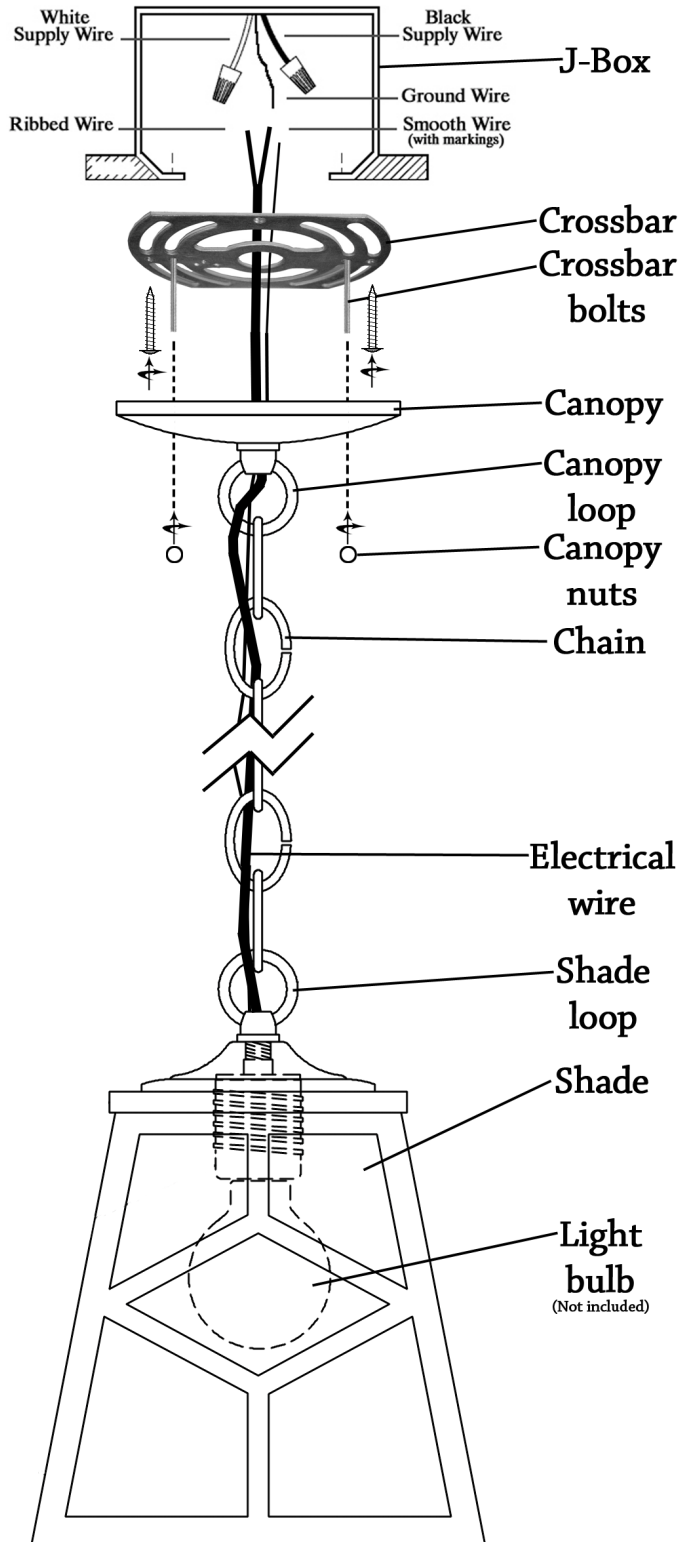


## IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

- 1.) Attach crossbar to ceiling or J-Box. Be sure there are two bolts pointing down from crossbar, ready to receive canopy.
- 2.) Attach appropriate amount of chain to canopy loop and the other end to the shade loop. Run your electrical wire up through the chain and through center of canopy. Bring canopy to power source, and connect electrical wires as per your local electrical code.
- 3.) Slide canopy up onto the two crossbar bolts, secure canopy flush to ceiling by screwing the two canopy nuts onto the two crossbar bolts.
- 4.) Bulb your fixture, (Bulbs provided by others).
- 5.) Power on, enjoy your new fixture!



*"A Commitment to Excellence in Lighting and Service"*

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00a.m - 6:00p.m ET

visit us on the web at [www.meyda.com](http://www.meyda.com)