## INSTALLATION INSTRUCTIONS

FOR ITEM 142266 (10"W Whispering Pines Flushmount)



CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL

**INJURY OR DEATH AND PROPERTY DAMAGE.** We recommend installation by a licensed electrician. This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.\*

Caution: Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.


## FIXTURE COMPONENTS

- 1. CANOPY
- CROSSBAR W/STUDS
- SHADE

## Caution:

## Fixture is OVERWEIGHT and not suitable for installation with standard Junction Box. Be sure power is off at the main breaker box prior to installation. Read all instructions in their entirety before beginning installation.

- 1. Carefully unpack all components and make certain that everything is on hand.
- 2. Unscrew the Steel Ball Finial to remove shade from the Canopy.
- 3. Unscrew Brass Balls from Canopy to release the Crossbar.
- 4. Using Customer supplied hardware, affix the crossbar to the J-Box, ensuring the connection is suitable for a minimum of 10 lbs. and that Electrical Supply Wires remain accessible.
- 5. Reconnect Canopy to Crossbar With Brass Balls from before.
- 6. Install 3X 25Watt E12 BA9 Bulbs (not included) into sockets.
- 7. Re-install Shade using Steel Ball Finial from earlier.

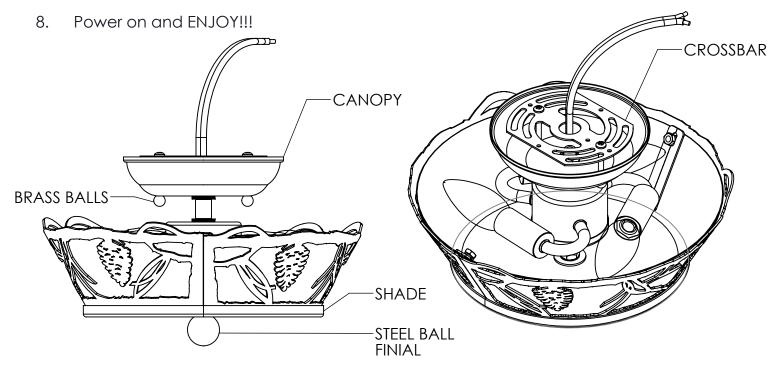

MEYDA.COM 1.800,222,4009 SALES@MEYDA.COM