


ASSEMBLY INSTRUCTIONS FOR #145971

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

- 1.) Wire LED drivers (A) to j-box as per local electrical codes.
- 2.) Insert LED drivers (A) into j-box.
- 3.) Attach crossbar (B) to j-box using customer provided screws.
- 4.) Feed electrical plugs (C) through center hole in crossbar (B) and connect to electrical plugs (D).
- 5.) Insert connected plugs into j-box and attach back plate (F) to crossbar (B) using back plate screws (E) as shown.
- 6.) For installation in wet locations, caulk around the complete perimeter of back plate (F) with waterproof sealant.

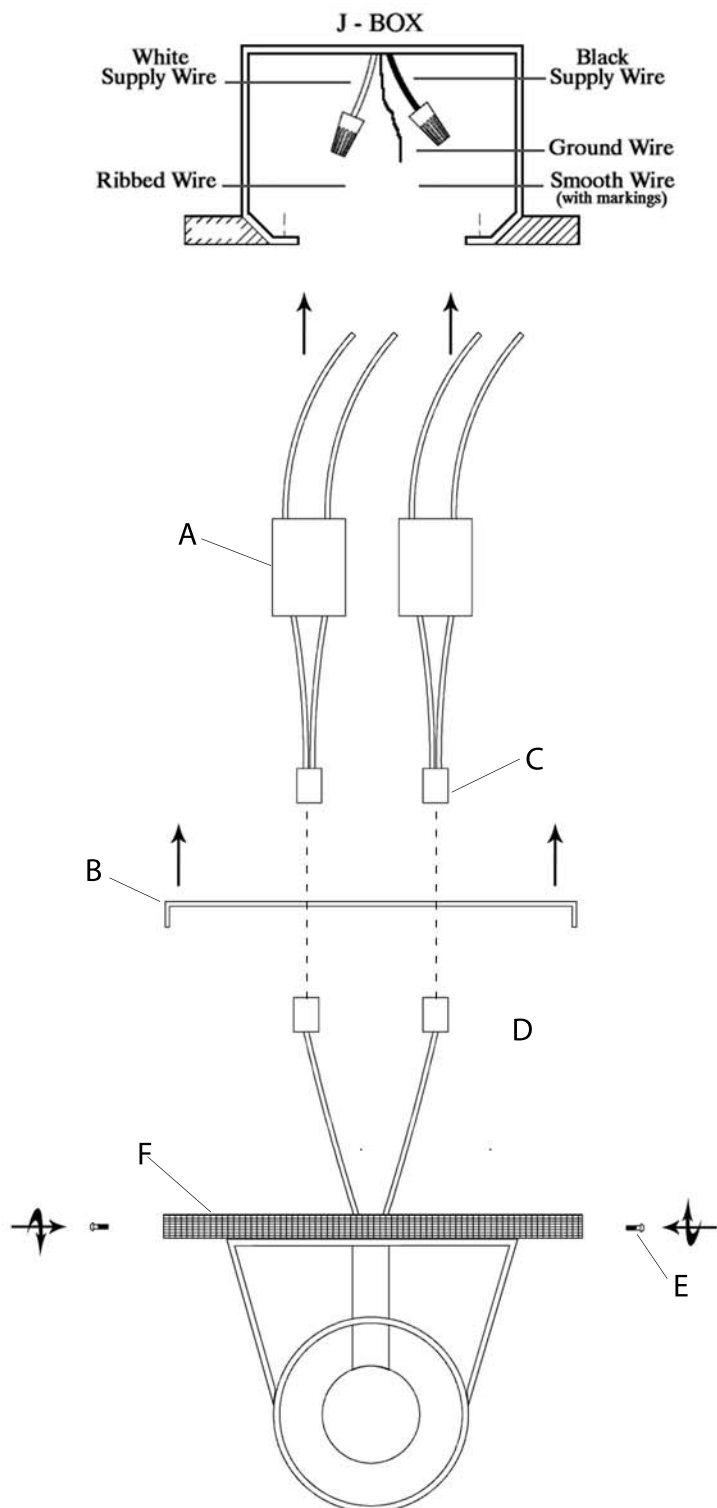

"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET

visit us on the web at www.meyda.com