


ASSEMBLY INSTRUCTIONS FOR #146397

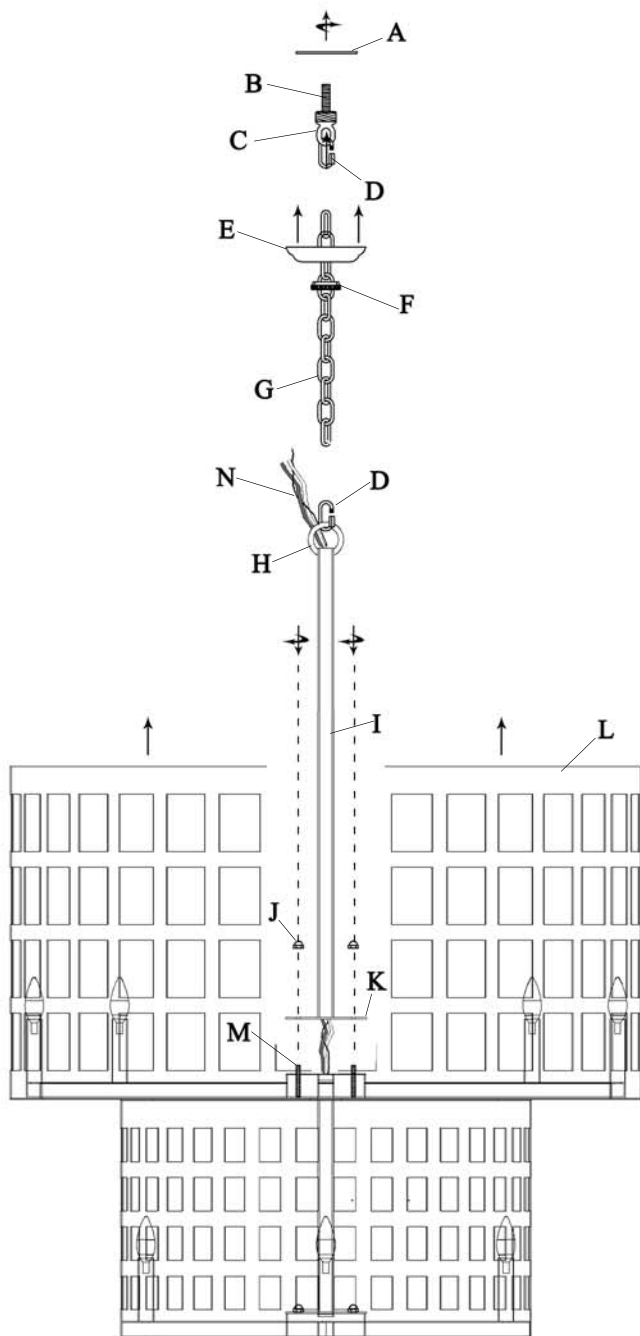

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

THIS FIXTURE WEIGHS OVER 50 LBS. NEC:314.27B, A luminaire that weighs more than 23kg (50lb) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM weight to be supported.

- 1.) Attach hub plate (K) on fixture rod (I) to hub bolts (M) using hub nuts (J).
- 2.) Attach cross bar nipple (B) to cross bar (A) and mount cross bar (A) to a secure location.
- 3.) Attach fixture chain (G) to rod loop (H) using quick link (D).
- 4.) Place canopy nut (F) then canopy (E) onto fixture chain (G), as shown.
- 5.) Raise up shade frame (L) and attach fixture chain (G) to support loop (C) using quick link (D).
- 6.) Wire electrical wires (N) as per local electrical codes.
- 7.) Slide canopy (E) back up fixture chain (G) and secure to support loop (C) with canopy nut (F).



"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET

visit us on the web at www.meyda.com