
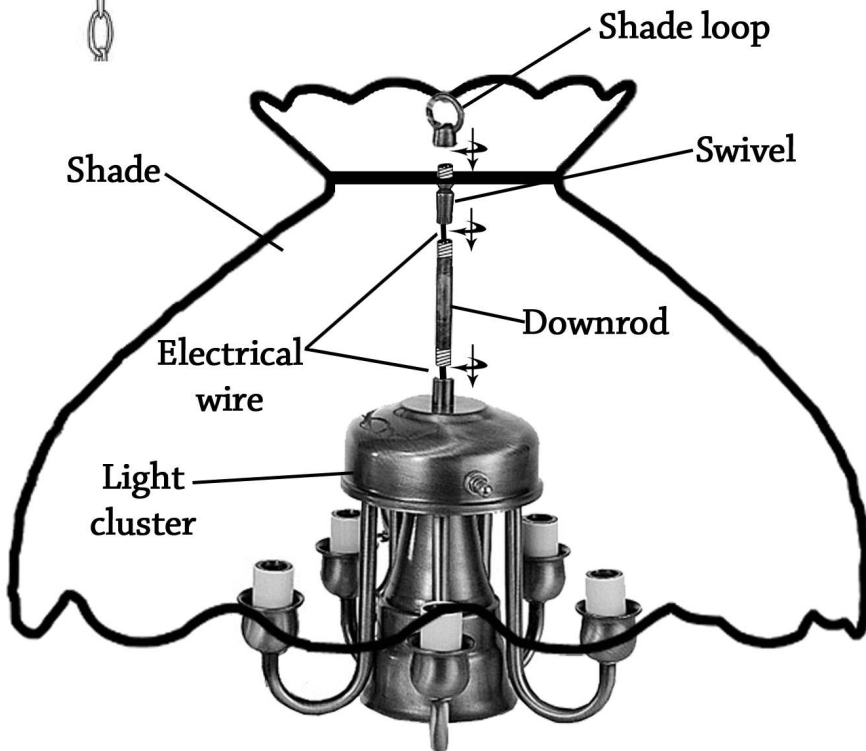


ASSEMBLY INSTRUCTIONS FOR #14655

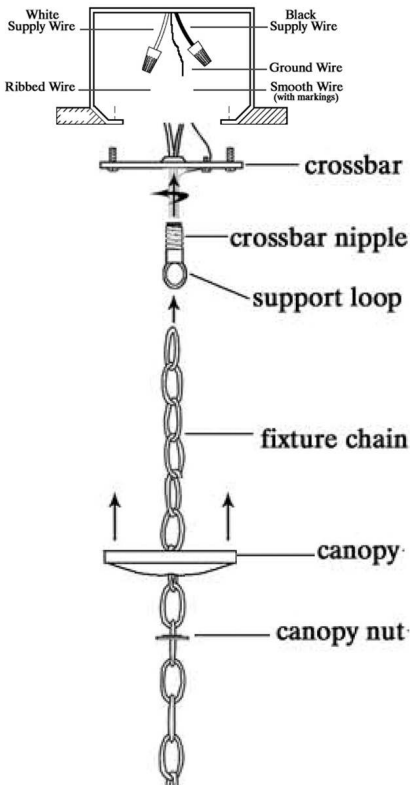


IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

- 1.) Attach crossbar nipple with support loop to crossbar.
- 2.) Run electrical wire from light cluster through the downrod, swivel, through the center of shade, & through the shade loop. Screw the downrod into the light cluster. Screw swivel onto the downrod. Screw a nipple into the swivel, then send nipple up through the center of shade. Screw your shade loop onto the swivel.
- 3.) Attach fixture chain to shade loop.
- 4.) Run your electrical wire up the length of chain and through the canopy nut, loop, and through the crossbar.
- 5.) Place canopy nut & then canopy on to fixture chain as shown. Attach top of chain to support loop. Attach crossbar to ceiling or J-Box. Connect electrical wires as per your local electrical code.
- 6.) Slide canopy up the chain, followed by canopy nut, and screw nut onto support loop making canopy flush to ceiling.
- 7.) Bulb your fixture, (bulbs provided by others). Power on, enjoy your new fixture!



"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00a.m - 6:00p.m ET

visit us on the web at www.meyda.com