

ASSEMBLY INSTRUCTIONS FOR #150352

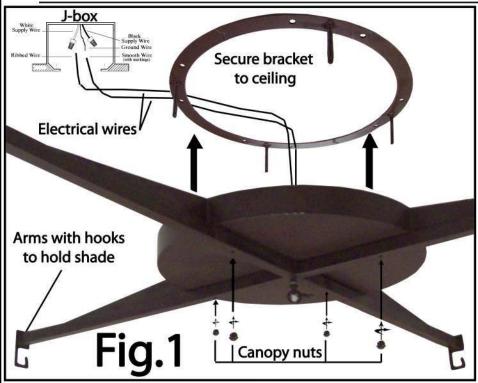

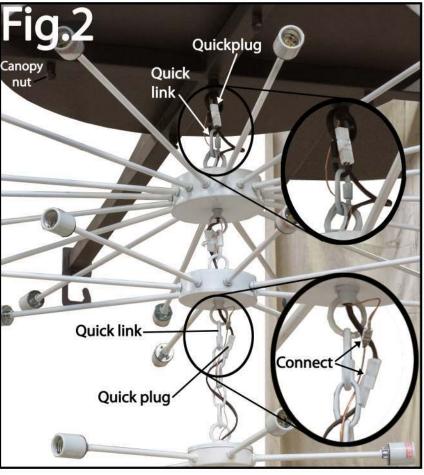

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

THIS FIXTURE WEIGHS OVER 50 LBS. NEC:314.27B, A luminaire that weighs more than 23kg (50lb) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM weight to be supported.

- 1.) Attach your ceiling bracket to your ceiling be sure to accommodate the wieght. (Fig. 1)
- 2.)Raise your canopy to the bracket and attach all electrical wires as per local codes.(Fig.1)
- 3.)Slide your canopy onto the four threaded rods pointing down from bracket. Secure with the four nuts provided.(Fig.1) 4.)Attach now the light cluster. For each section you will open the quicklink and hook the loop above it, and then connect the plugs associated with it.(Fig.2)
- 5.) You may bulb your fixture at this time.








"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009 MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET visit us on the web at www.meyda.com

ASSEMBLY INSTRUCTIONS FOR #150352

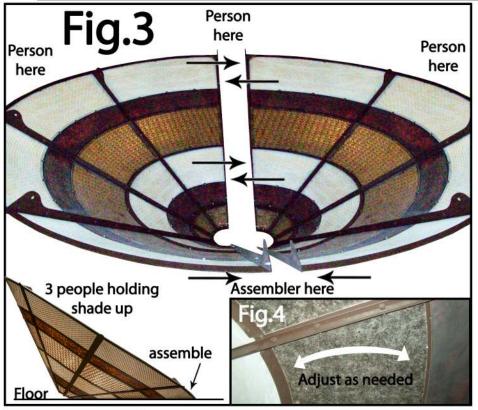





IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

6.)Shade assembly: This is a minimum four person job. Bring your two halves together. Place one of the two seams to be connected, on the floor. With three people holding the two pieces together, fourth person will secure them together with nuts and bolts.(Fig.3&5) Once together carefully rotate shade to the other seam to be secured. Do not let the weight of the shade rest on the center tabs. Secure other seam with nuts and bolts. (Fig.5&6)Your three people may need to flex or shimmy the shade pieces to accomodate the bolts. SPECIAL NOTE: During shipping mica & acrylic panels may have shifted, you will want to move them back into place so that you have no gaps of light.(Fig.4) 7.) Attach your shade arms last with nuts

- and bolts.(Fig.6) Raise your shade to your canopy hooks,
- and hook the arms that are pointing up from shade.(Fig.7)
- 9.)Place center diffuser sideways through center opening. Let it rest on center tabs.





"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009 MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET visit us on the web at www.meyda.com