
ASSEMBLY INSTRUCTIONS FOR #150922

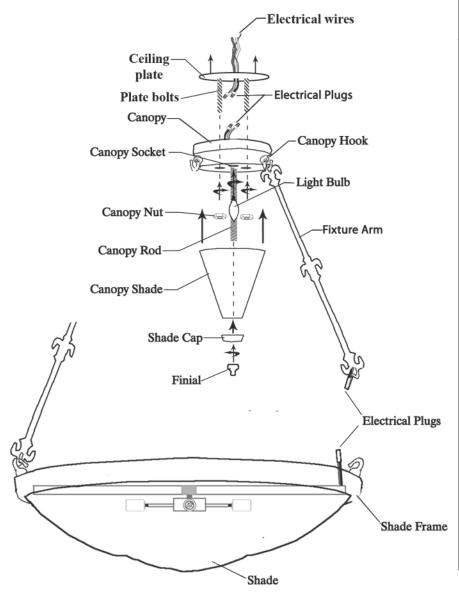

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

- 1.) Feed electrical wire through the ceiling plate. Connect electrical wires from canopy to power source as per users local electrical code. Mount the ceiling plate to the ceiling. Be sure there is two bolts pointing down from plate, ready to receive canopy.
- 2.) Slide canopy up onto the two ceiling plate bolts. Secure canopy flush to ceiling by screwing the two canopy nuts onto the two plate bolts.
- 3.) Attach the fixture arms to the canopy hooks, (be sure arms are pointed in the same direction).
- 4.)Lift frame with shade in center, and hook frame onto the bottom of fixture arms. Connect the electrical plugs at the arm connection.
- 5.)Bulb fixture, (bulbs provided by others).
- 6.) Slide small shade up onto canopy rod. Secure in position by placing shade cap onto bottom of small shade, & screw the finial onto the canopy rod.
- 7.) Power on, enjoy your new fixture!



visit us on the web at www.meyda.com