

ASSEMBLY INSTRUCTIONS FOR # 154107

Fig.1


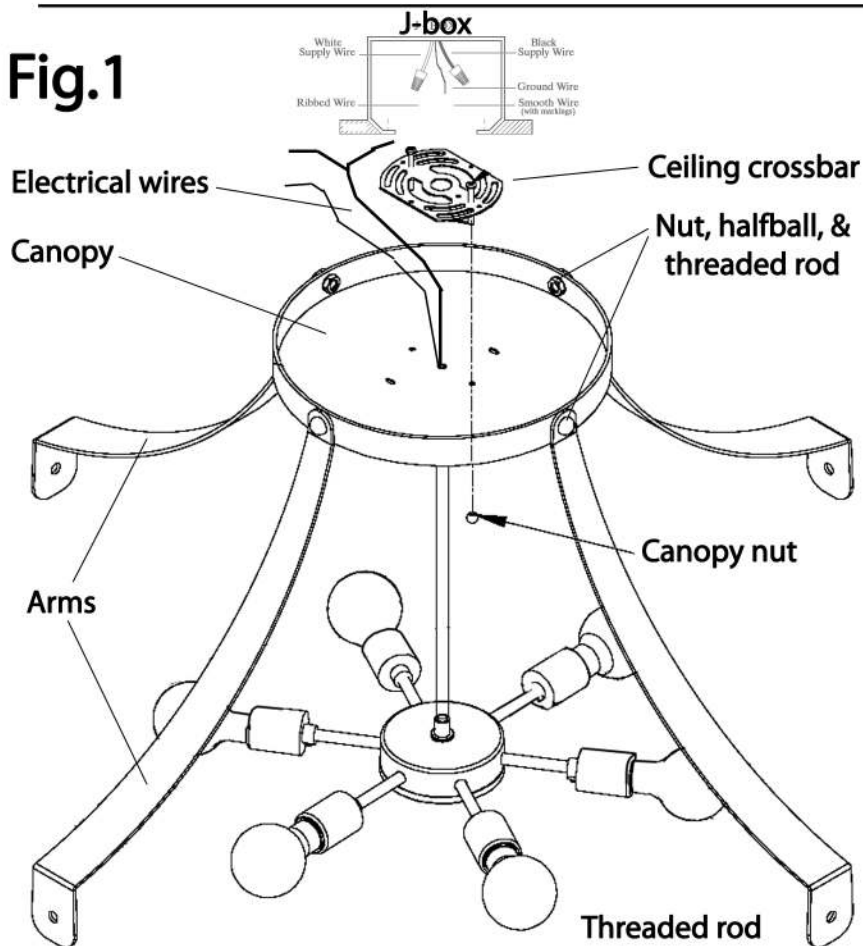


Fig.2

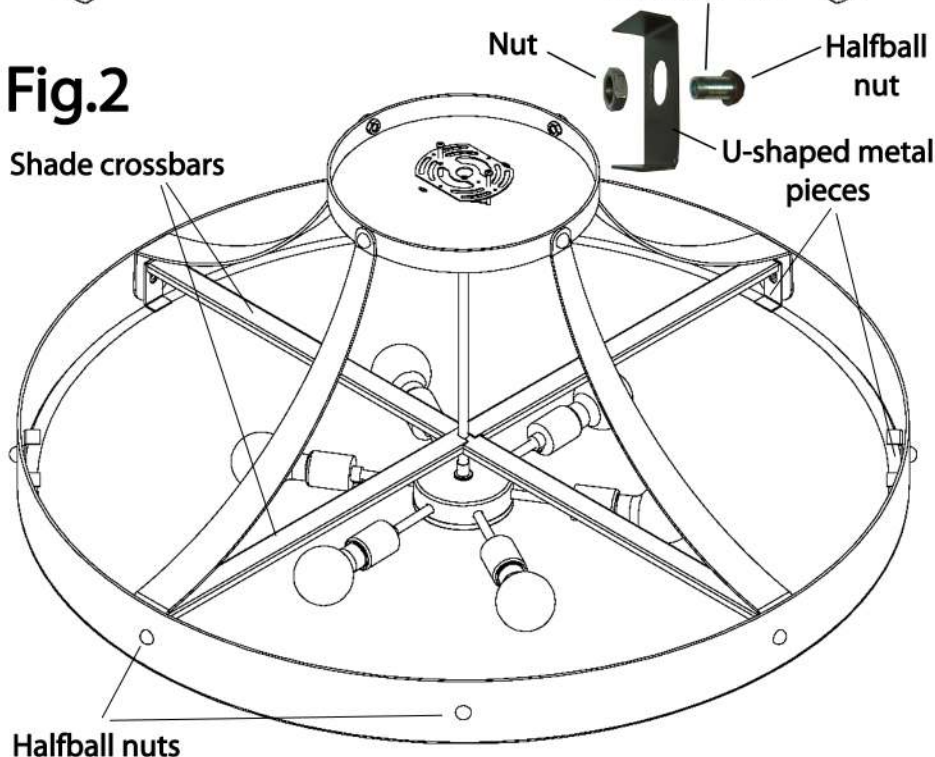

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

- 1.) Attach crossbar to ceiling.
- 2.) Attach arms to canopy using the halfballs, nuts, and threaded rod pieces. (Fig.1)
- 3.) Attach bowl to the arms using the U-shaped metal pieces, threaded rod, and halfball nuts found in your hardware kit. This will also be used to support shade crossbar.
- 4.) (Fig.2) Place shade crossbars onto light cluster. The uppermost bar has a wide gap to accommodate the lower bar. Place the lower bar first & then the top. Screw the knurled nut down to secure the two bars. (Fig.2&3) Place clear half circle diffusers on top of shade crossbars.
- 5.) Bring fixture to ceiling, attach all electrical wires as per local codes.
- 6.) Secure fixture to ceiling by sliding fixture's canopy onto the two threaded bolts pointing down from ceiling crossbar. Screw canopy nuts onto ceiling bolts. (Fig.1)
- 7.) Power on, Enjoy your new fixture.

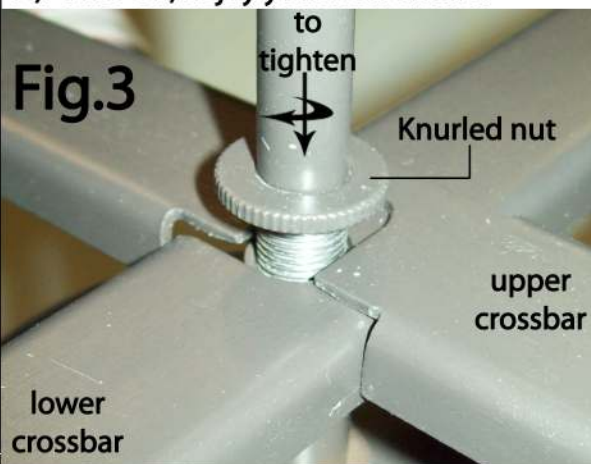


Fig.3



"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET

visit us on the web at www.meyda.com