
ASSEMBLY INSTRUCTIONS FOR #156521

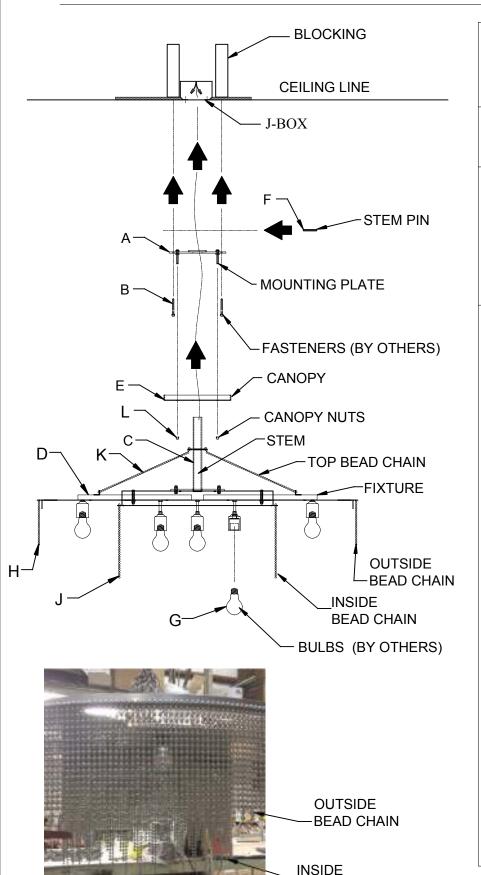

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

THIS IS A TWO PERSON JOB

THIS FIXTURE WEIGHS OVER 50 LBS.

NEC:314.27B, A luminaire that weighs more then 23kg (50lb) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM weight supported.

- 1) SECURE MOUNTING PLATE (A) TO CEILING WITH FASTENERS (B) BY OTHERS INTO BLOCKING BY OTHERS.
- 2) SLIDE CANOPY (E) ONTO STEM (C) AND SECURE IN PLACE BY INSERTING STEM PIN (F) SUCH THAT PIN SEATS INTO "CRADLE" INSIDE CANOPY (E).
- 3) MAKE ELECTRICAL CONNECTION AT "J" BOX PER LOCAL ELECTRICAL CODE.
- 4) SECURE FIXTURE INTO PLACE WITH CANOPY NUTS (L).
- 5) INSTALL LAMPING (G). BULBS PROVIDED BY OTHERS.
- 6) INSTALL BEAD CHAIN (H) TO OUTSIDE PERIMETER OF RINGS.
 INSTALL IN ALTERNATING PATTERN OF 6" & 6 ½" LENGTHS AROUND PERIMETER.
- 7) INSTALL BEAD CHAIN (J) TO INSIDE PERIMETER OF RING. INSTALL IN ALTERNATING PATTERN OF 7", 8", 9", 10" & 11 $\frac{1}{4}$ ".
- 8) INSTALL 16" LENGTHS OF TOP BEAD CHAIN (K) AROUND STEM (C).



"A Commitment to Excellence in Lighting and Service"

BEAD CHAIN