
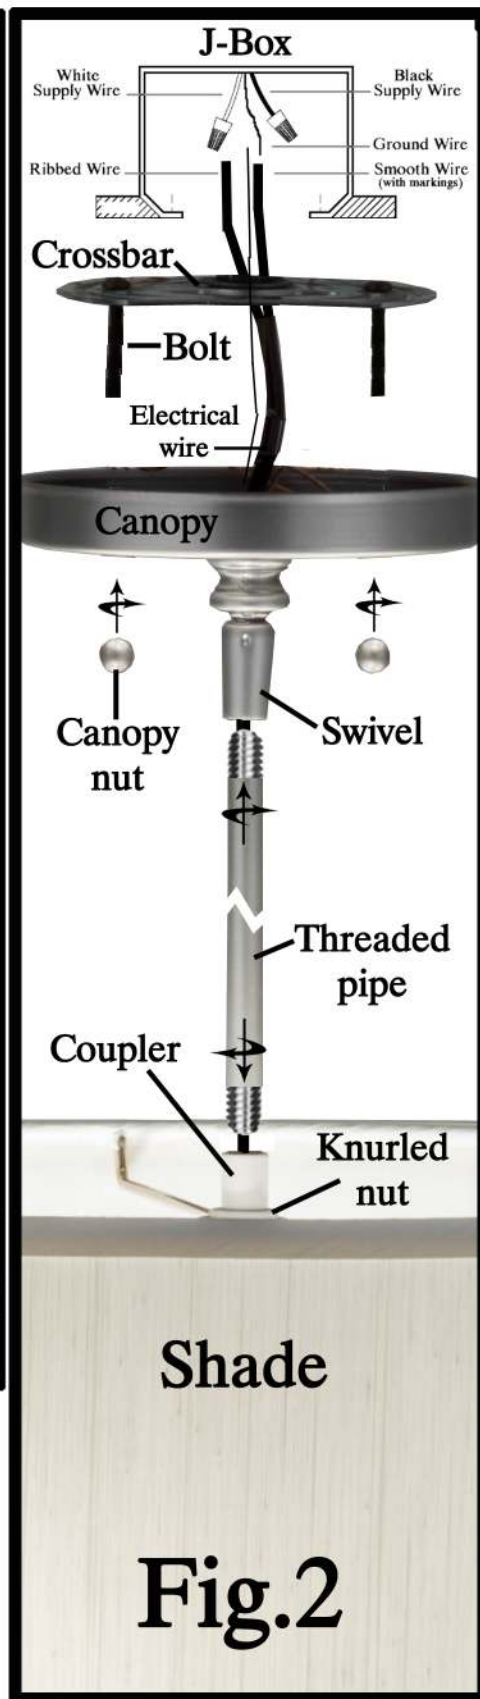


# ASSEMBLY INSTRUCTIONS FOR # 159670

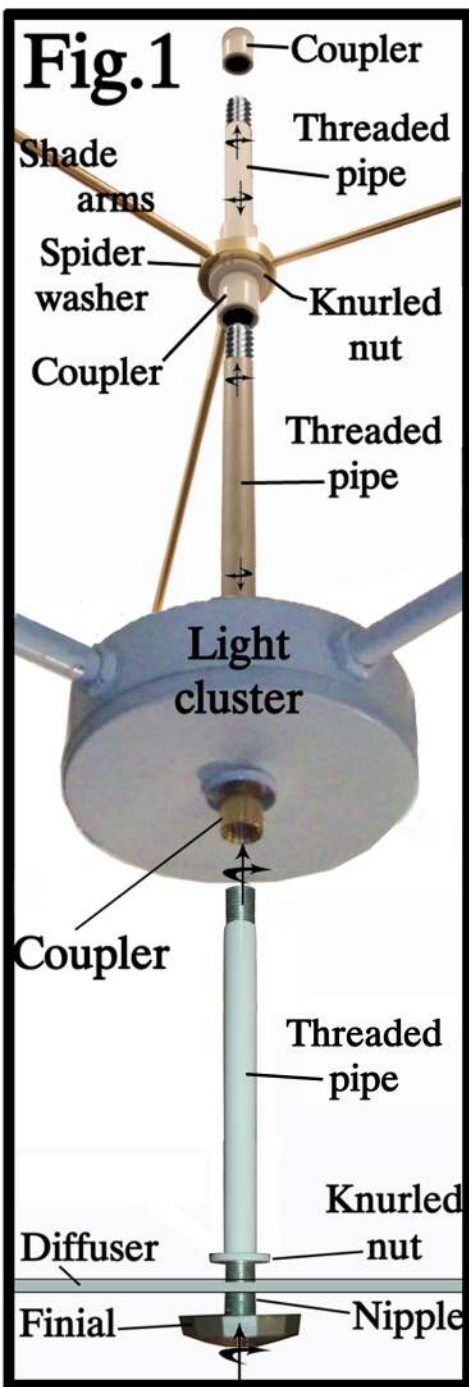

## IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

- 1.) Attach Crossbar to ceiling, or J-Box.
- 2.) Assemble your fixture:
  - 2a) Run your electrical wire, which comes out of light cluster, through middle threaded pipe. Screw middle threaded pipe into the top of light cluster. Screw onto that a coupler, then a knurled nut, place your shade onto the threaded pipe as well, then follow that with another knurled nut and another coupler. Now screw top threaded pipe into the coupler above shade arms:
  - 2b) Determine your fixture height, choose your threaded pipe. You may need to combine one or more lengths of threaded pipe. To do so connect your two or more sections of pipe with a coupler in between them. Run your electrical wire through your pipe section(s), and screw pipe(s) into coupler above shade arms.
  - 2c) Run your electrical wire through swivel & canopy. Screw your top most section of pipe(s) into the swivel that is attached to canopy.
  - 2d) Screw your bottom threaded pipe into the underside of light cluster. Screw on your knurled nut, slide your diffuser onto the threaded pipe, and secure in place with finial.
- 3.) Bring fixture to ceiling and connect all electrical wires as per your local codes. Slide canopy onto the two bolts that point down from crossbar. Secure canopy flush to ceiling with the provided canopy nuts.
- 4.) Bulb your fixture, power on, enjoy!
- 5.) Have a Meyda Fine Day!



*"A Commitment to Excellence in Lighting and Service"*

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET

visit us on the web at [www.meyda.com](http://www.meyda.com)