

ASSEMBLY INSTRUCTIONS FOR #163750

Fig.1

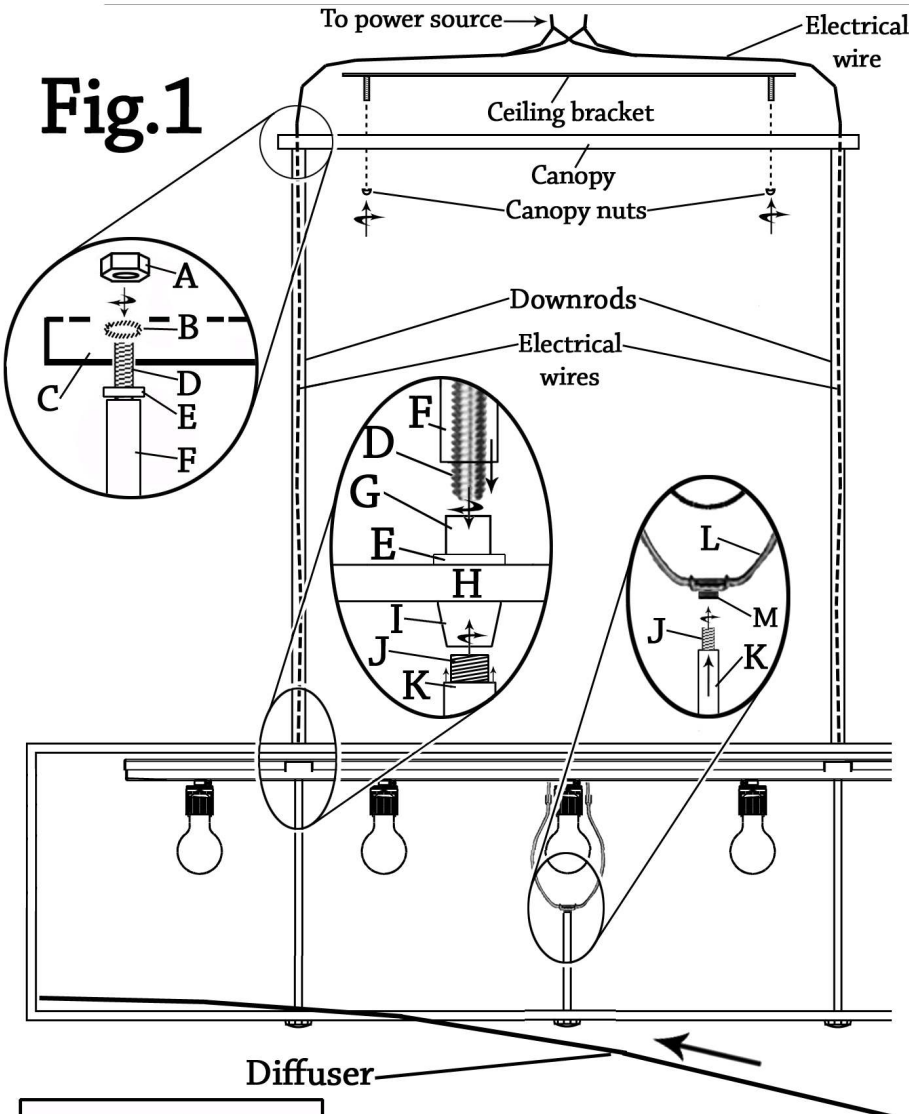


Fig.2

2 mid-size downrods
Shortest center downrod
Check ring
Knurled nut

Fig.3


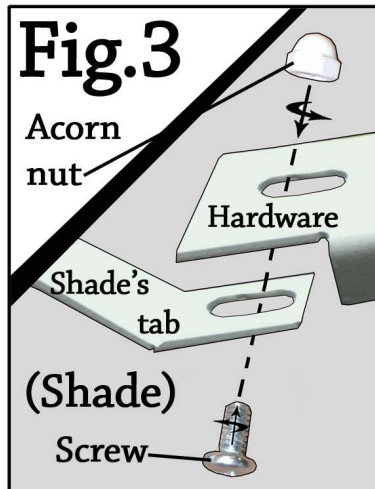


Fig.4

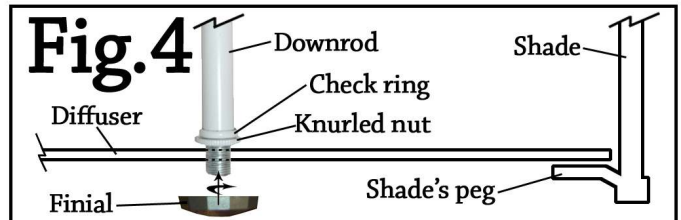


IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

- 1.) Assemble top of fixture: Run your electrical wire through the longest threaded rods. Screw your two longest threaded rods (D) into the couplers (G) on top of light hardware (H). Slide sleeve pipes (F) down onto the threaded rods so that they rest within the check rings (E). Top your downrods/sleeves (F) off with two check rings (E) & then the canopy (C). Threaded rods (D) will protrude through the outer-most canopy holes. Secure canopy to downrods by placing a lock washer (B) onto threaded rod, and screw a nut (A) down onto threaded rod tight. (Fig.1)
- 2.) Assemble lower part of fixture: Screw smaller threaded rod (J) into coupler (I) on the underside of light hardware (H). Slide sleeve (K) up onto the threaded rod. (Fig.1) Secure in place by placing check ring onto bottom of sleeve, and screw a knurled nut onto the bottom of threaded rod. Repeat for other rod of same length. (Fig.2) Attach harp (L) to underside of light hardware (H). Attach smallest downrod in the same manner in which other two longer downrods were installed. (Fig.2) Screw smallest threaded rod into nut (M) welded onto harp. (Fig.1)
- 3.) Attach shade to light hardware: Line up the hardware with the shade's tabs, and secure together by screwing the screw through the tab, hardware and into acorn nut. (Fig.3)
- 4.) Slide the diffuser into the shade at an angle (Fig.1) & maneuver it so that it rests on top of shade pegs located at the bottom of the shade pointing inwards. Once diffuser is placed on shade pegs, the downrods should be protruding through the diffuser. Screw the finials onto the downrods. (Fig.1&4)
- 5.) Attach your ceiling bracket to ceiling, bring fixture to ceiling and connect all electrical wires as per your local codes. Slide canopy/fixture up onto the ceiling brackets bolts & secure canopy flush to ceiling by screwing the canopy nuts onto bracket bolts. Bulb your fixture (bulbs provided by others). Power on, enjoy your new fixture!

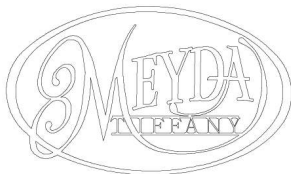

"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00a.m - 6:00p.m ET

visit us on the web at www.meyda.com