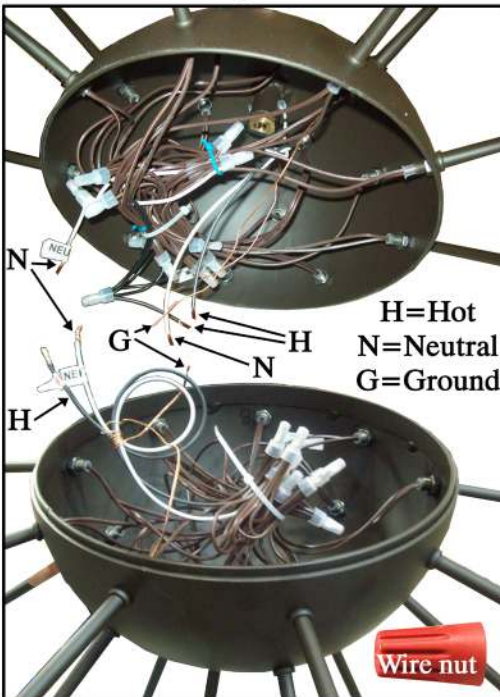
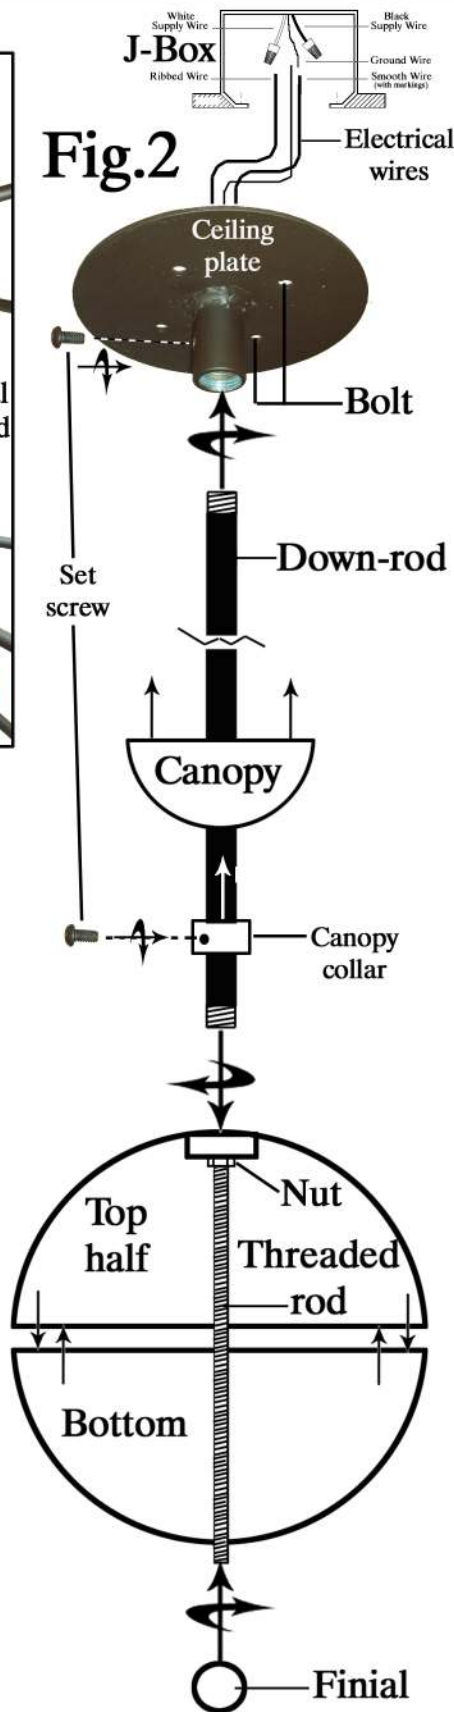


ASSEMBLY INSTRUCTIONS FOR #164694

Fig.1

Fig.2


IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION


CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

!!When taking your fixture out of the shipping crate you must remove the pieces through the top!!

- 1.) Assemble your fixture: Screw a nut onto the end of your threaded rod, and screw your threaded rod into the inside of the top half. Screw your nut to the top of threaded rod so as to secure threaded rod in place. (Fig.3) Bring your top half and your bottom half together. Connect your wires: hot is black, there is 3 hot and 3 neutral. Connect the 3 hot together, secure with a wire nut. Do the same to the neutral wires. Connect also the two ground wires. (Fig.1) Now connect the top half w/ the bottom. Keep them together by screwing the ball finial onto the bottom of the threaded rod (which should be protruding from the bottom half). (Fig.2)
- 2.) Screw your ceiling plate onto the downrod and screw in your top set screw. Slide canopy onto downrod followed by the canopy collar. There will be a bundle of wires on top of the top half, you will feed these wires up through the down rod. While holding the wires, (so they do not twist) screw the down rod into the top half.(Fig.2) See Fig.2 for 3,4,&5
- 3.) Bring your fixture to the ceiling and connect all electrical wires as per local codes.
- 4.) Secure fixture to ceiling through the four holes on the ceiling plate.
- 5.) Slide canopy up to the ceiling, followed by the canopy collar. Canopy is flush with ceiling secure in place with canopy collar and set screw.
- 6.) Bulb your fixture, Power on, Enjoy your new fixture!
- 7.) Have a Meyda Fine Day!!

Fig.3

(Top inside of top half)

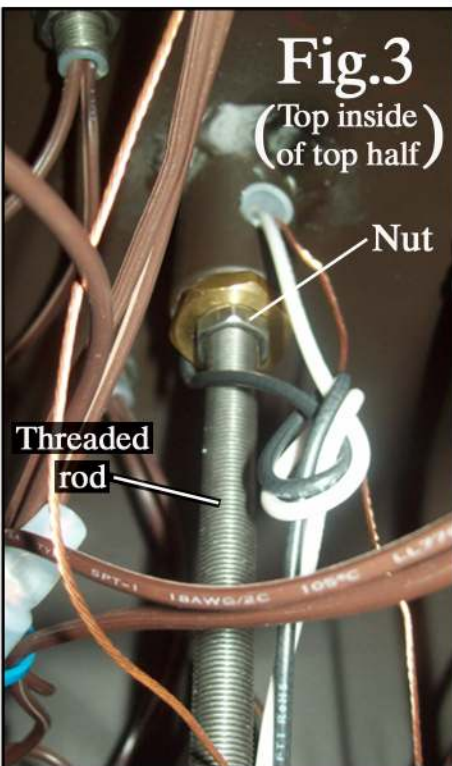

"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET

visit us on the web at www.meyda.com