INSTALLATION INSTRUCTIONS

FOR ITEM 16547 Greenbriar Oak Semi-Flushmount



CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE. We recommend installation by a licensed electrician.

This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.*

Caution: Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.


FIXTURE COMPONENTS

- 1. FIXTURE HARDWARE
- 2. ARM (QTY 4)
- 3. SHADE
- 4. DECORATIVE LEAF AND ACORN ACCENT (QTY 4)

Caution:

Be sure power is off at the main breaker box prior to installation. Read all instructions in their entirety before beginning installation.

- 1. Carefully unpack all components and make certain that everything is accounted for.
- 2. Remove Brass Balls from Canopy to release Crossbar w/Studs. Reserve Balls for later use.
- 3. Affix Crossbar to Junction Box ensuring that connection is suitable to hold a minimum of 10lbs and that Electrical Supply Wires remain accessible.
- 4. Following All Local Codes and Procedures, make connection from Fixture Lead Wires to Supply Wires.
- 5. Lift Fixture Hardware up to ceiling allowing Crossbar Studs to pass through Canopy. Secure w/ reserved Balls.
- 6. Attach hooked ends of Arms to Shade Loops.
- 7. Remove Finial from bottom of Fixture and hang Shade by connecting loose ends of Arms to Hooks on Canopy. Replace Final.
- 8. Install 2-E26 60Watt Bulbs(not included) into Sockets.
- 9. Hang Decorative Leaf and Acorn Accents from Shade.
- 10. Power on and ENJOY!!!

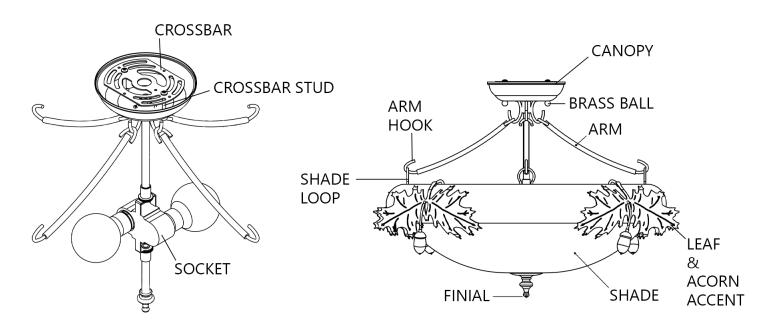

FIXTURE HARDWARE