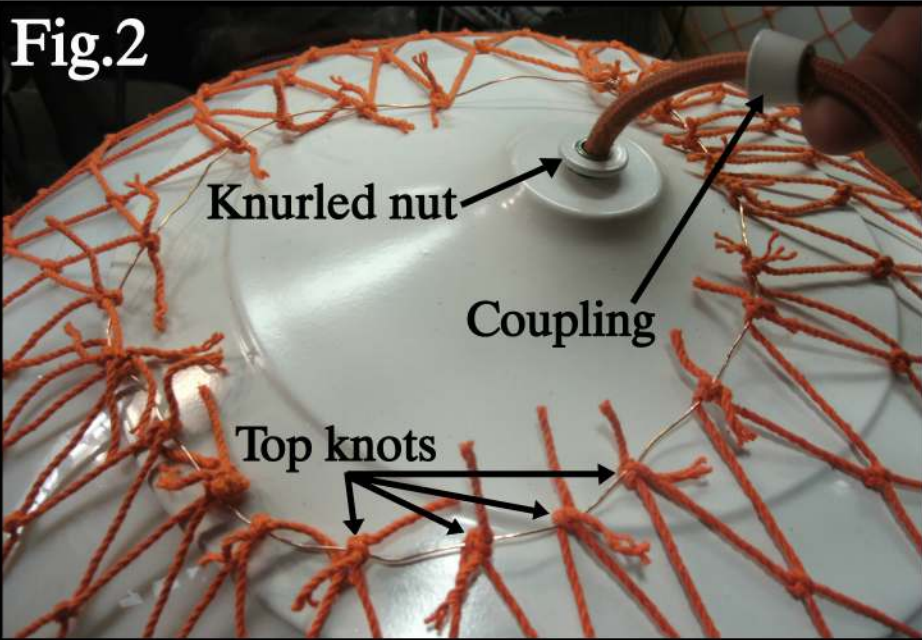


# RE-LAMPING INSTRUCTIONS FOR # 166538


**Fig.1**



**Fig.2**



**Fig.3**

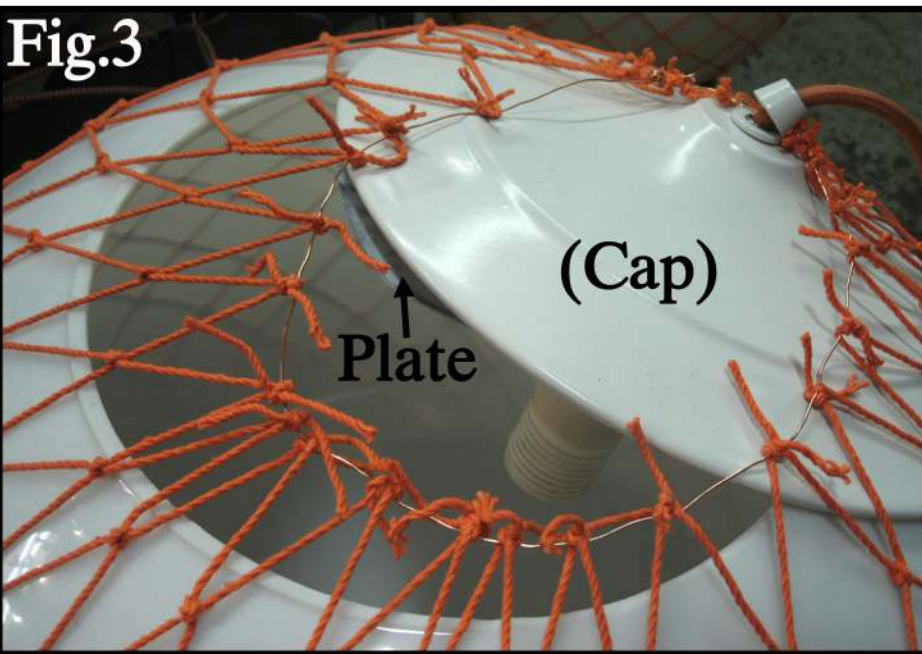

## IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

- 1.)Unravel the wire holding your netting tight. (Fig.1)You do not need to take it completely off.(Fig.2)
- 2.)Unscrew your coupling and then your knurled nut. You do not need to unscrew your knurled nut completely off, (Fig.2) just enough to loosen the cap and plate. (Fig.3)
- 3.)Install your bulbs, provided by others.
- 4.)Replace your cap and plate. Tighten down the knurled nut and screw the coupling back down.
- 5.)Pull the wire and bunch the netting up onto the coupling.(Fig.2)
- 6.)Wrap the wire back around the bunched netting, and try to wrap it so that the wire wraps just under the top knots.(Fig.2)



*"A Commitment to Excellence in Lighting and Service"*

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET

visit us on the web at [www.meyda.com](http://www.meyda.com)