


ASSEMBLY INSTRUCTIONS FOR #168371

Universal crossbar
pattern will look like this






IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR
CIRCUIT BREAKER BOX BEFORE STARTING
INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL
PARTS BEFORE ASSEMBLY. BULBS ARE NOT
INCLUDED

- 1.) First remove the finial from the half-ball cap. Pull the half ball cap off of fixture. Inside you will see a cross bar with two bolts protruding through it. This will be secured on with a double nut on each bolt. Remove the nuts, and your light cluster will pull away from the reflective wheel.
- 2.) Attach your reflective wheel to the ceiling or J-Box using the universal crossbar pattern which is part of the wheel frame. When attaching to ceiling be sure the power source wires are running down through the universal crossbar pattern.
- 3.) Bring light cluster to the wheel, and attach all electrical wires as per your local codes.
- 4.) Slide the crossbar within the light cluster, back up onto the two bolts. Secure in place by screwing the double nuts onto the bolts.
- 5.) Place half-ball cap back onto the nipple/light cluster, followed by the finial.
- 6.) Bulb your fixture (bulbs not included). Power on, enjoy your new fixture!

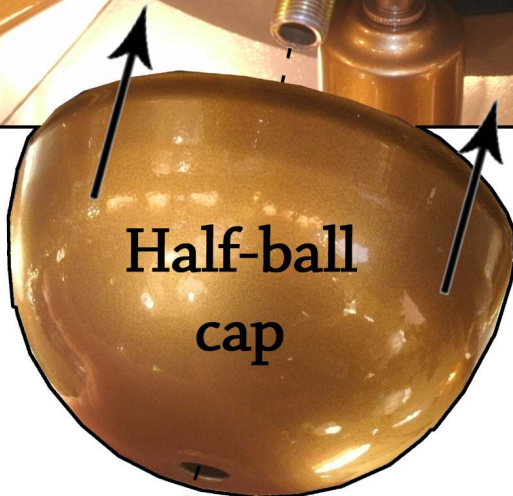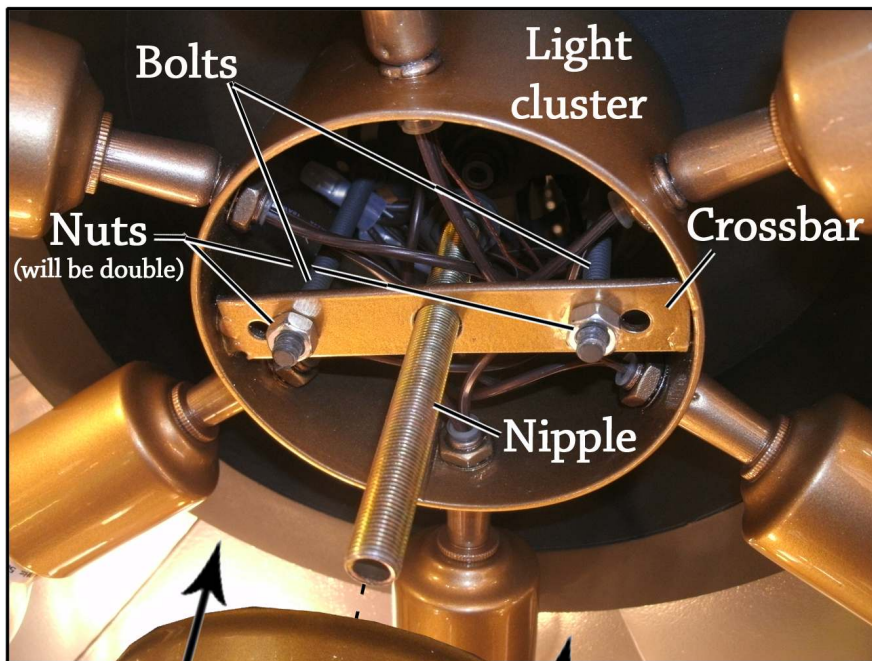

"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00a.m - 6:00p.m ET

visit us on the web at www.meyda.com