
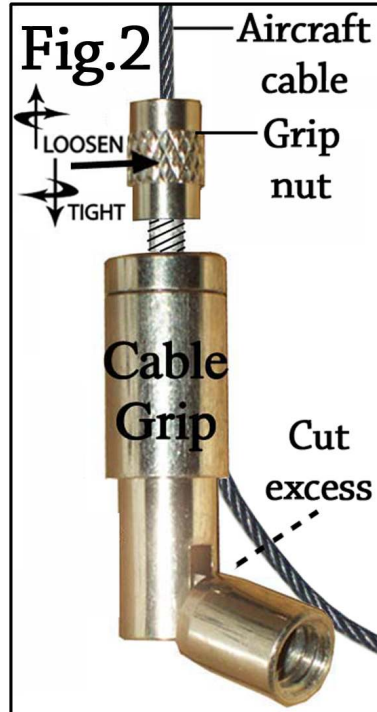


THIS FIXTURE WEIGHS OVER 90 LBS.

0700 12/16/15

NEC:314.27B, A luminaire that weighs more than 23kg (50lbs.) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM WEIGHT to be supported.

ASSEMBLY INSTRUCTIONS FOR #169104





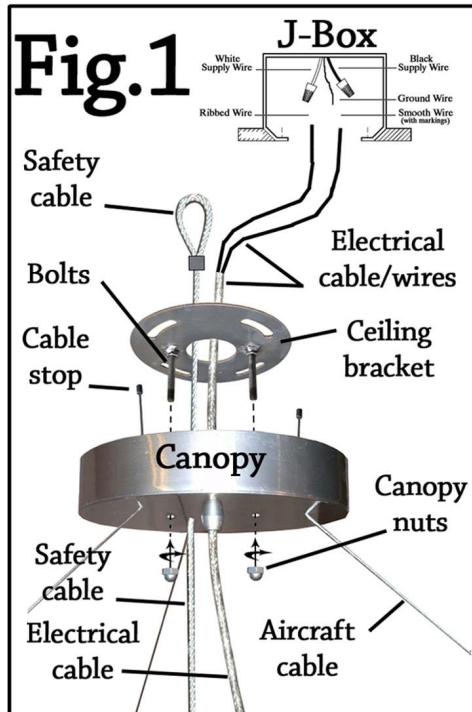


IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

- 1.) Attach ceiling bracket to ceiling. There will be two bolts pointing down to receive the canopy.(Fig.1)
- 2.) Prepare your canopy: Send your aircraft cables through the smallest holes in your canopy. Be sure to have the cable stop resting inside the canopy. Run your electrical cable through the canopy. Send your safety cable through the canopy as well.(Fig.1)
- 3.) Connect electrical wires as per your local codes. Attach safety cable to a secure location in the ceiling. Slide canopy up onto ceiling bracket bolts and secure in place with the two canopy nuts provided.
- 4.) Raise shade up to the aircraft cables.(Fig.1) Run your aircraft cables through your cable grips: Unscrew the grip nut a little, not all the way. If you push down on the grip nut it will allow the cable to pass freely. Let go of nut, and it will grip the cable. Once you are satisfied with the cables length (or position), you should screw grip nut back down. You may cut excess cable once you are absolutely sure of cable's position. You do not have to cut excess.(Fig.2)
- 5.) Attach bottom of safety cable to shade if it is not already.(Fig.3) Connect your quick plugs.(Fig.5)
- 6.) You may adjust the tautness of your shade's fabric, by using hex key, no more than 1/8 of a turn at a time. (Fig.4) DO NOT OVER EXPAND/TIGHTEN! Counter clockwise expands (tightens fabric). While clockwise does the opposite.
- 7.) Bulb your fixture. (Bulbs provided by others)
- 8.) Screw threaded nipple into the coupler located under the light cluster. Slide sleeve up onto threaded nipple, followed by a check ring. Secure these by screwing a knurled nut onto nipple. Slide diffuser up onto nipple, while at an angle, to rest within the shade. Let it rest on the shelf that is in the bottom of the shade. Screw finial onto nipple.(Fig.6)
- 9.) Power on, enjoy your new fixture!

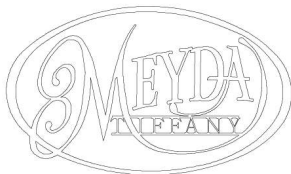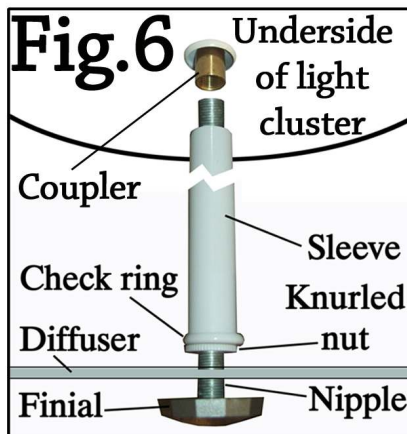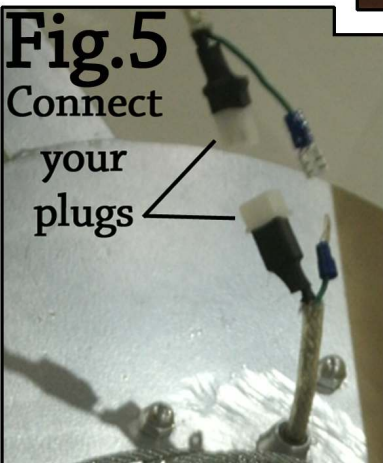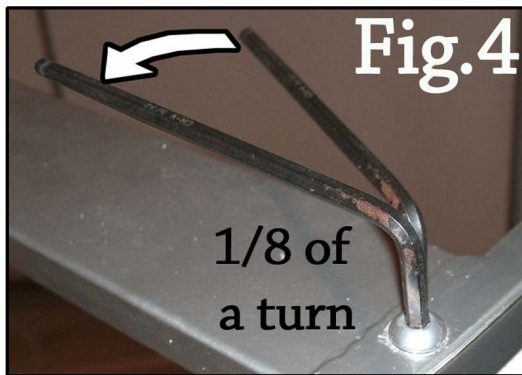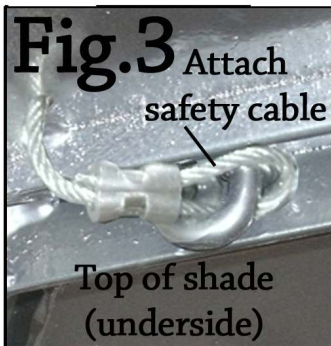

"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00a.m - 6:00p.m ET

visit us on the web at www.meyda.com