


# ASSEMBLY INSTRUCTIONS FOR # 169619

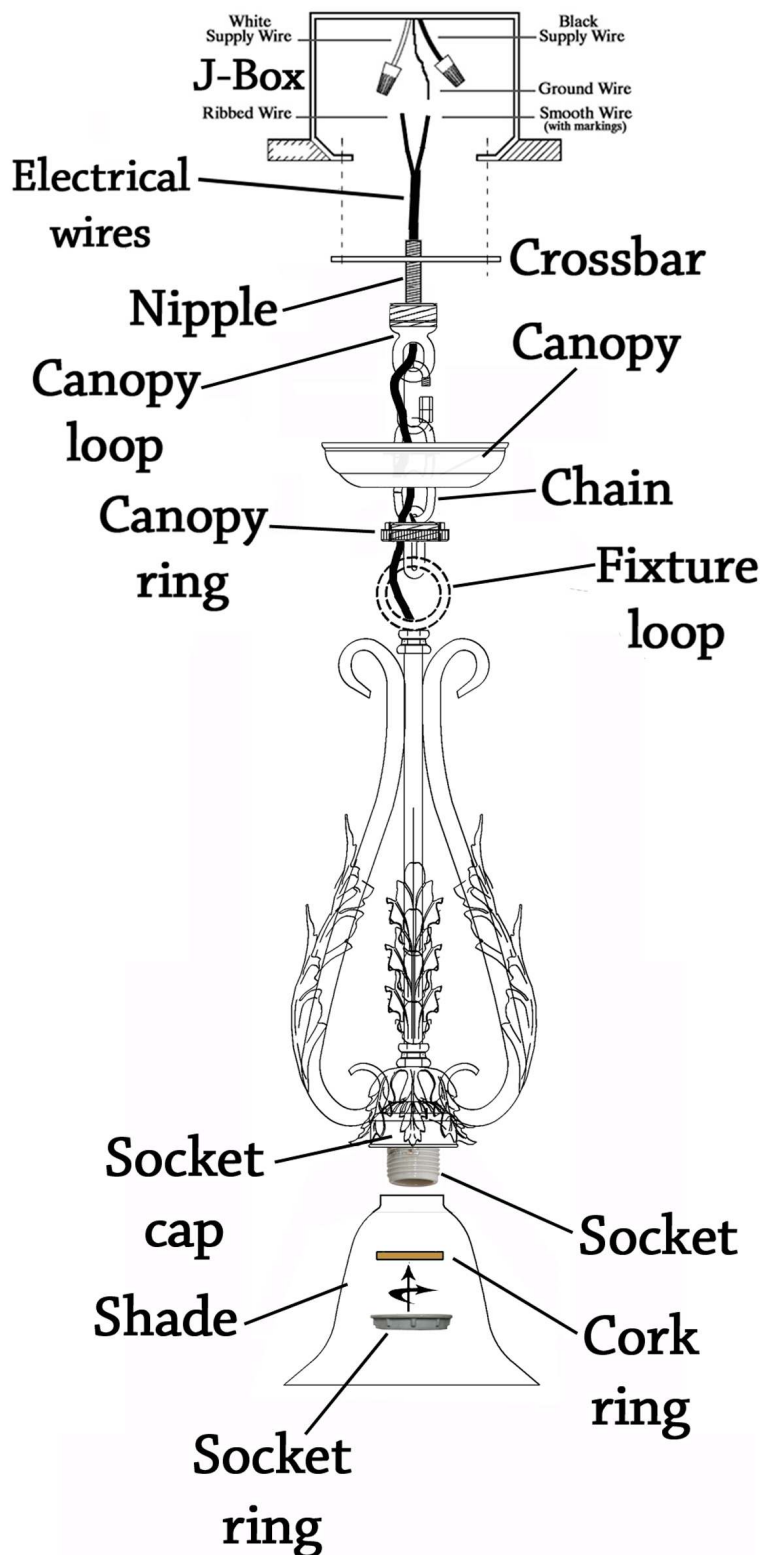


## IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR  
CIRCUIT BREAKER BOX BEFORE STARTING  
INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL  
PARTS BEFORE ASSEMBLY. BULBS ARE NOT  
INCLUDED

- 1.) Attach crossbar nipple with canopy loop to crossbar.
- 2.) Attach crossbar to secure location in ceiling.
- 3.) Attach fixture chain to fixture loop.
- 4.) Place canopy ring then canopy onto fixture chain as shown.
- 5.) Attach fixture chain to canopy loop.
- 6.) Wire as per your local electrical code.
- 7.) Slide canopy up to ceiling, screw canopy ring onto crossbar nipple and tighten to canopy.
- 8.) Insert top of shade into shade cap, place cork ring onto socket, and screw socket ring onto socket.
- 9.) Bulb your fixture (supplied by others).
- 10.) Power on, enjoy your new fixture!



*"A Commitment to Excellence in Lighting and Service"*

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00a.m - 6:00p.m ET

visit us on the web at [www.meyda.com](http://www.meyda.com)