


ASSEMBLY INSTRUCTIONS FOR #170599

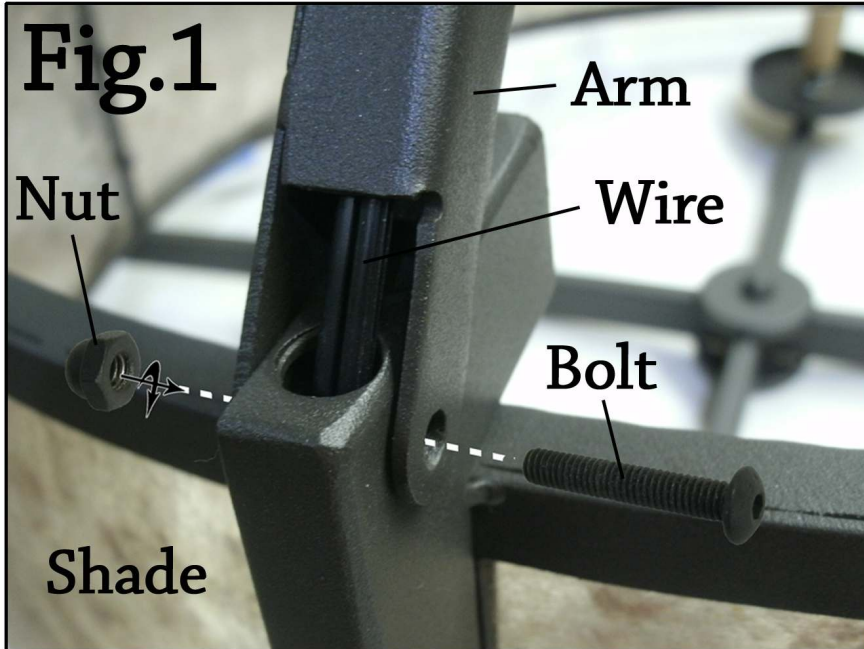

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

1.) Assemble fixture: You will need to run your wires up through the arms. Once through attach arms to shade, run bolt through arm/shade joint. Screw nut onto bolt. Repeat for all arms/wires. (Fig.1)

Steps 2-5 See Fig.2



2.) Run wires through canopy from each arm. Secure arms to canopy with nut and bolt.

3.) Attach crossbar to J-Box, make sure there is a threaded nipple pointing down to receive canopy & finial. Also make sure there is enough nipple to go the length of ceiling to finial.

4.) Bring fixture to J-Box, connect all electrical wires as per your local codes.

5.) Slide canopy and fixture up onto threaded nipple, secure in place flush to ceiling with finial.

6.) Bulb your fixture, place bottle shades, power on. Enjoy your new fixture!

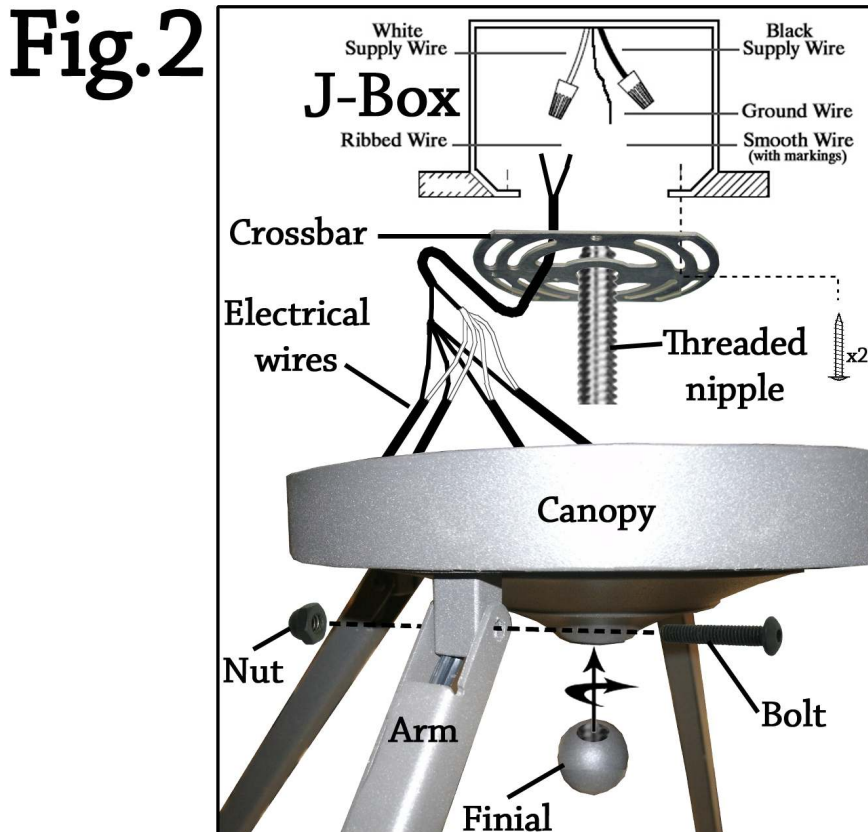

"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00a.m - 6:00p.m ET

visit us on the web at www.meyda.com