
## ASSEMBLY INSTRUCTIONS FOR # 170820

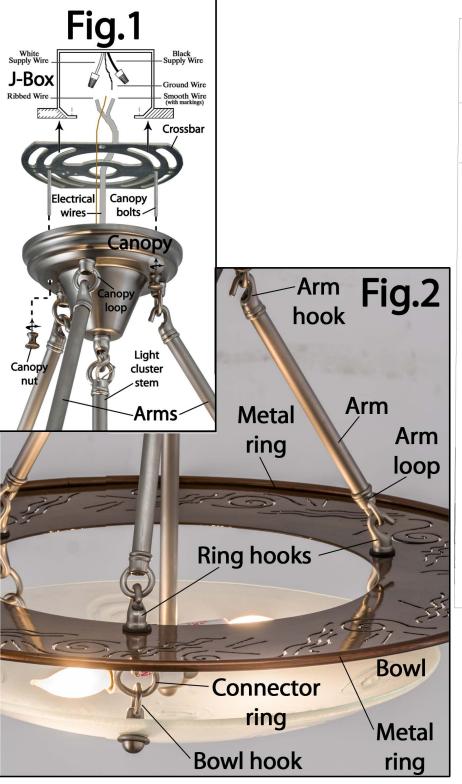

## **IMPORTANT**

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

- 1.)Attach crossbar to J-Box, there should be two bolts pointing down to recieve canopy.(Fig.1)
- 2.)Bring your canopy and light cluster to the ceiling. Connect all electrical wires as per your local codes.(Fig.1)
  3.)Secure canopy flush to ceiling with the two canopy nuts provided. Be sure your light cluster stem is hooked, (not hanging by the wire).(Fig.1)
- 4.) Attach the three arms to the canopy, (Fig.1) attach the metal ring to the arms. (Fig.2)
- 5.)Place the three connector rings to the underside hooks of the metal ring.6.)Carefully hook the glass bowl onto the connector rings.(Fig.2)
- 7.)Bulb your fixture, power on, enjoy!
- 8.) Have a Meyda Fine Day!



MONDAY - FRIDAY 8:00a.m - 6:00p.m ET visit us on the web at www.meyda.com