


ASSEMBLY INSTRUCTIONS FOR #170887

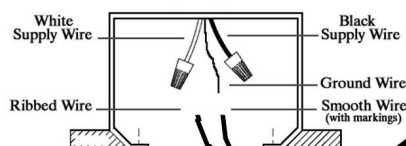

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

- 1.) Attach your crossbar to ceiling or J-Box.
- 2.) Assemble fixture: Run your electrical wire through the threaded rod (C). Screw threaded rod (C) into the coupler (B) that is attached to top of the shade. Slide sleeve pipe (D) onto threaded rod, so that it sits within the check ring (A). At the top of the threaded rod place another check ring (A) so that it sits upon the sleeve (D). Now place canopy onto threaded rod. Secure canopy to rod by placing a washer (G) & spider washer (H) onto threaded rod, then screw your nut (I) onto threaded rod.
- 3.) Bring fixture to the power source and connect all electrical wires as per your local codes.
- 4.) Slide canopy up onto the two bolts (J) pointing down from crossbar. Secure canopy/fixture flush to ceiling by screwing your two canopy nuts (F) onto the threaded bolts (J).
- 5.) Bulb your fixture, (bulbs not included). Power on, enjoy your new fixture!

(Shade)



"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00a.m - 6:00p.m ET

visit us on the web at www.meyda.com