
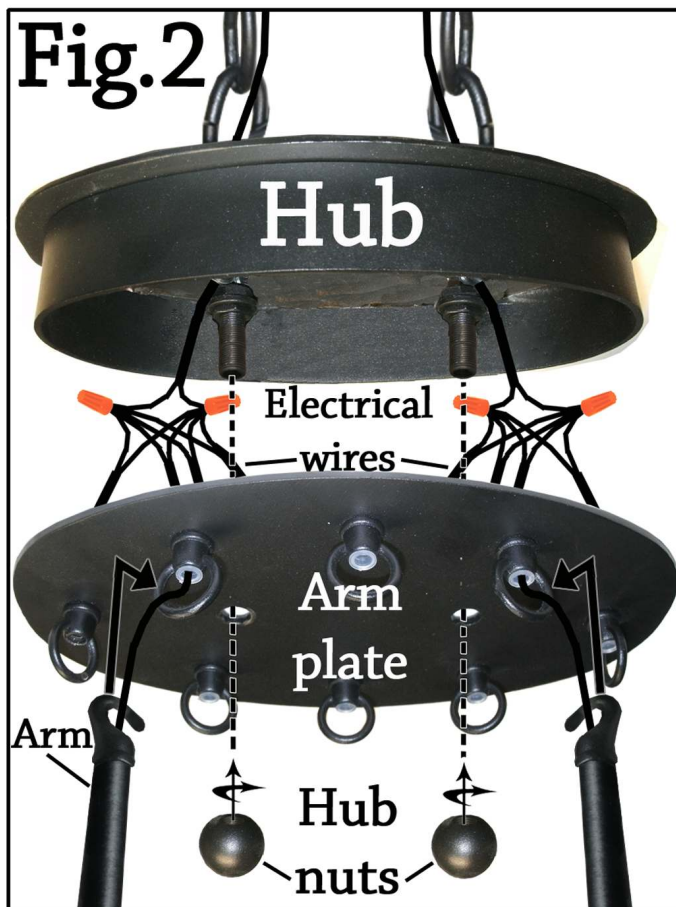


**THIS FIXTURE WEIGHS OVER 50 LBS.**

0700 12/24/15

NEC:314.27B, A luminaire that weighs more than 23kg (50lbs.) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM WEIGHT to be supported.

## ASSEMBLY INSTRUCTIONS FOR #171574

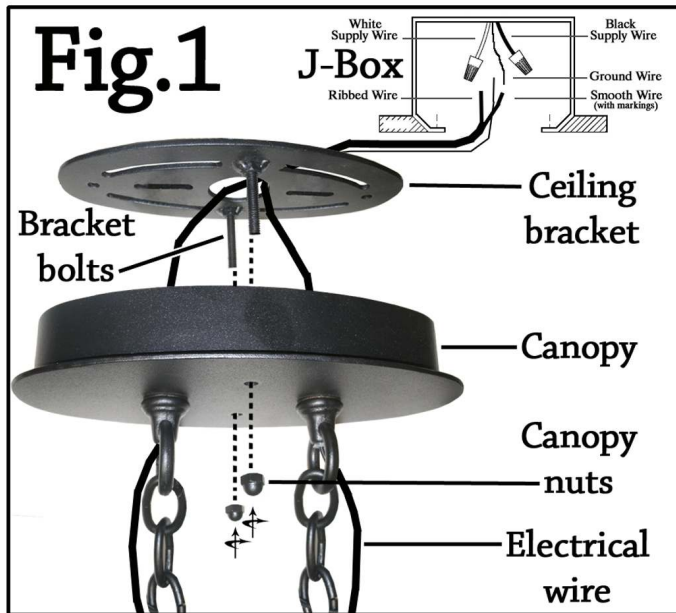


### IMPORTANT


TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

- 1.) Attach ceiling bracket to ceiling.(Fig.1)
- 2.) Attach chain to canopy and hub. Run your hub to canopy wires through the two loops on the hub, and two loops on the canopy.(Fig.1&2)
- 3.) Raise your canopy/hub to ceiling, and connect all electrical wires in canopy to power source as per your local codes. Slide canopy up onto ceiling bracket, and secure flush to ceiling by screwing the two canopy nuts onto the bracket bolts.(Fig.1)
- 4.) Each of the arms will have a mark (eg. A2). Match each of the arms to a loop with same mark, within the oval of chandelier. Run each of the arm wires through the appropriate arm. Position wires so that it is not pinched in the arm/chandelier connection.(Fig.3) Hook each arm onto chandelier oval's loops.
- 5.) This may take two people: Holding the arm plate above chandelier oval, hook the top of each arm to the arm plate so that the oval of the plate and oval chandelier line up and match.
- 6.) Raise the arm plate/chandelier to the hub. Make your electrical connections within hub.(Fig.2) Slide arm plate up onto the two threaded nipples pointing down from hub. Secure in place, screw the two hub nuts onto those nipples.
- 7.) Bulb your fixture (bulbs provided by others), power on, enjoy your new fixture!

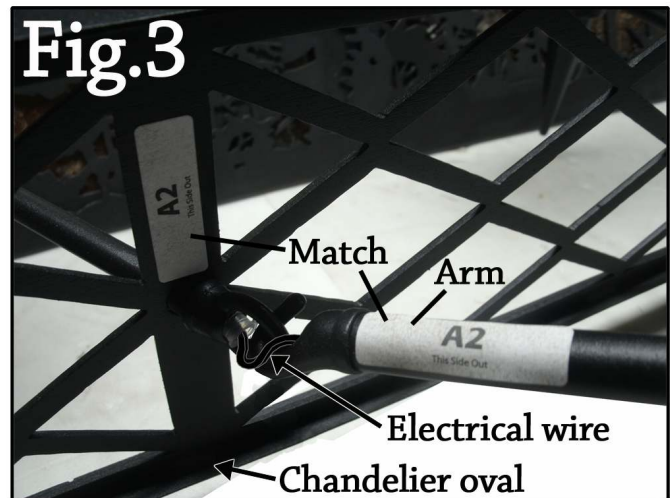

2ND AVE™



*"A Commitment to Excellence in Lighting and Service"*

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-843-1602

MONDAY - FRIDAY 8:00a.m - 6:00p.m ET

visit us on the web at [www.2ndave.com](http://www.2ndave.com)