


NEC:314.27B, A luminaire that weighs more than 23kg (50lbs.) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM WEIGHT to be supported.

ASSEMBLY INSTRUCTIONS FOR #174918

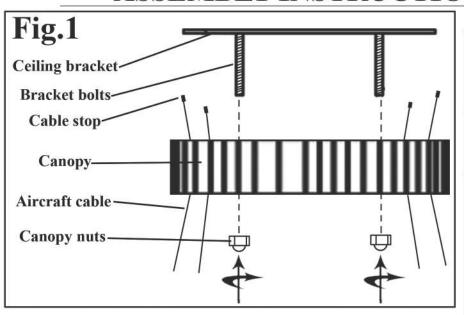

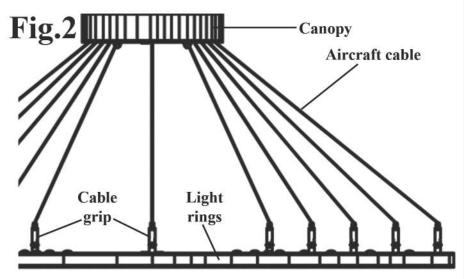

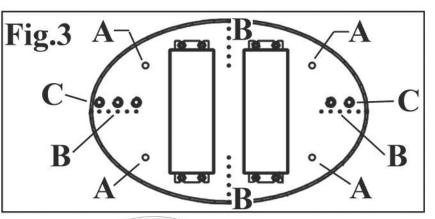


IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

- 1.)Attach ceiling bracket to ceiling. Be sure there is bracket bolts pointing down ready to receive canopy. (Fig.1)
- 2.)Prepare canopy by running your aircraft cables through smallest holes in the canopy "B". Run the cables through, so that the cable stop rests within the canopy. (Fig.1)
- 3.) Lay out the light rings flat. Send the electrical wires through the canopy as well. Send them through the holes marked "C" 2 on one side 3 on the other. (Fig.3) 4.) Attach aircraft cables: Connect aircraft cables to light ring by running the cables through the cable grip. You must unscrew the grip nut, but not all the way. Once the grip nut is loosened, push it back towards the cable grip body. In this way the cable will pass freely through the cable grip. Let go of the grip nut and it will grip the cable. (Grip Detail)
- 5.)Bring canopy to ceiling, (along with light rings), and connect electrical wires as per your local electrical code. Slide canopy up onto the ceiling bracket bolts, and secure canopy flush to ceiling by screwing the canopy nuts onto the bracket bolts. (Fig.1)
- 6.)Adjust the aircraft cables to your preference. Once you are sure of the length, screw the grip nut back down. (Grip Detail) Once you are absolutely sure of length you may cut excess cable.
- 7.)Power on, enjoy your new fixture!

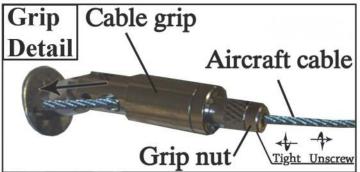



MONDAY - FRIDAY 8:00a.m - 6:00p.m ET visit us on the web at www.meyda.com