


ASSEMBLY INSTRUCTIONS FOR # 175788

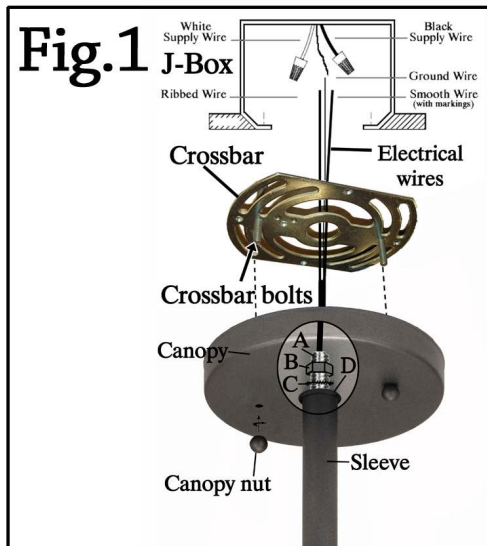


IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

- 1.) Attach crossbar to ceiling or J-Box, be sure there is two bolts pointing down ready to receive canopy. (Fig.1)
- 2.) Assemble fixture: Run your electrical wire (F) (from the joint) up through the downrod. Screw the downrod (E) into the joint (G). (Fig.2)
- 3.) Send wire through the check ring (D), canopy, lock washer (C), nut (B). Sandwich all of this, securing everything in place by screwing nut onto downrod's nipple (A). (Fig.1)
- 4.) Bring fixture to ceiling & connect all electrical wires as per your local codes. Slide fixture & canopy up onto the two bolts pointing down. Screw the canopy nuts onto the two crossbar bolts, securing canopy flush to ceiling. (Fig.1)
- 5.) Bulb your fixture, (bulbs provided by others) Unscrew the fitter screws, and place globe into shade. Screw fitter screws back into fitter allowing screws to screw into the globe just under the lip. (Fig.2) DO NOT over-tighten!
- 6.) You may adjust balance by unscrewing the set screw in the weight and sliding the weight into desired position. (Fig.4) Screw set screw back in. Power on, enjoy your new fixture.

Fig.2

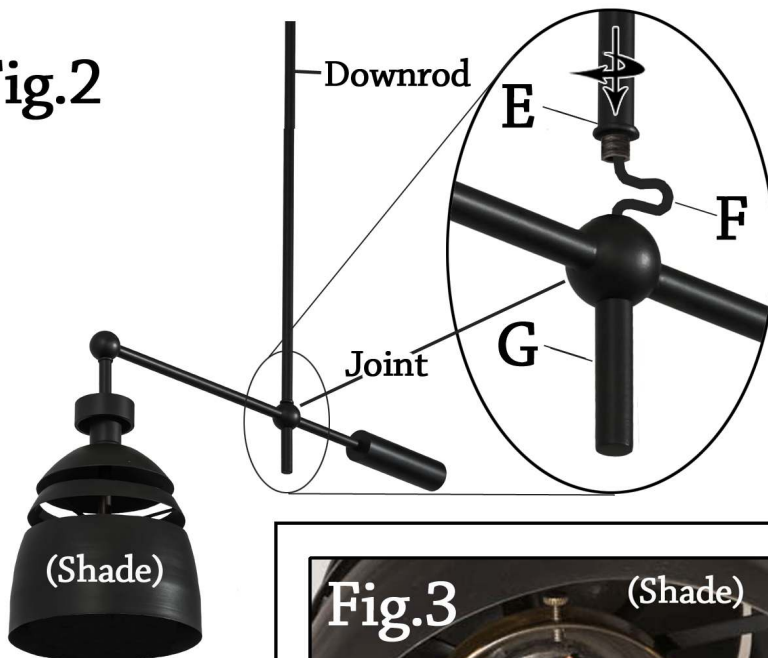

(Shade)



Fig.3



Lip

Globe

Fig.4

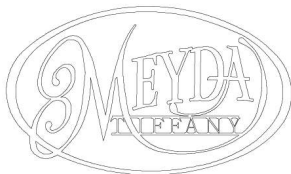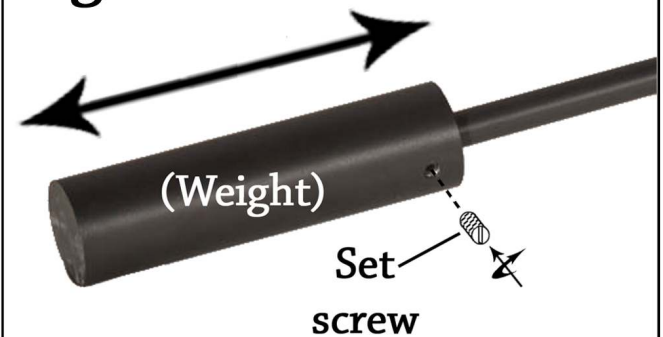

"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00a.m - 6:00p.m ET

visit us on the web at www.meyda.com