


ASSEMBLY INSTRUCTIONS FOR #176036

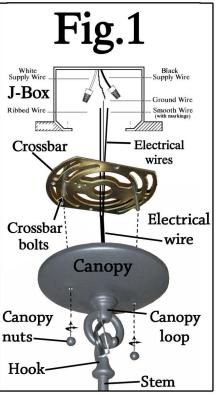

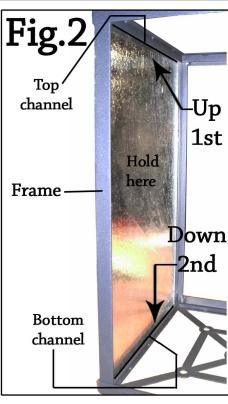

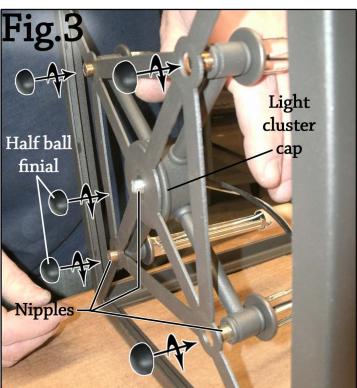

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

1.) Install glass into metal frame before attaching light cluster to frame. To do so, carefully place glass panel into center of metal frame. Hold panel with both hands, in the center of panel, one on either side. Slide top of panel up into the frame's top channel. Hold glass flush with the frame, and let it down carefully into the bottom channel. (See Fig.2) Repeat with the next three panels. 2.) Attach the light cluster to bottom of frame. Start by unscrewing the half ball finial from the bottom center of light cluster. This finial was holding a cap on, keep this cap on light cluster, and place light cluster onto bottom of frame allowing the five nipples to protrude through the five holes. They may not all go through at once. Screw on the center half ball finial, but not all the way. Work your way around the outer four nipples to get them through the holes. Screw the finials on, but not all the way, so that you have some room to move the other nipples into place. Once all nipples through, screw all finials on tight. (See Fig. 3) 3.)Attach crossbar to J-box or ceiling. There should be two bolts pointing down from crossbar ready to recieve canopy. Run your electrical wire from hook through the canopy. Hook your fixture onto canopy loop.(See Fig.1)

- 4.)Raise canopy & fixture to ceiling. Connect all electrical wires as per your local codes. Slide canopy up onto the two crossbar bolts and secure canopy flush to ceiling by screwing the two canopy nuts.(See Fig.1)
- 5.)Place candle covers. Bulb your fixture, power on, enjoy your new fixture! (Bulbs provided by others.)



CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009 MONDAY - FRIDAY 8:00a.m - 6:00p.m ET visit us on the web at www.meyda.com