


ASSEMBLY INSTRUCTIONS FOR #176338

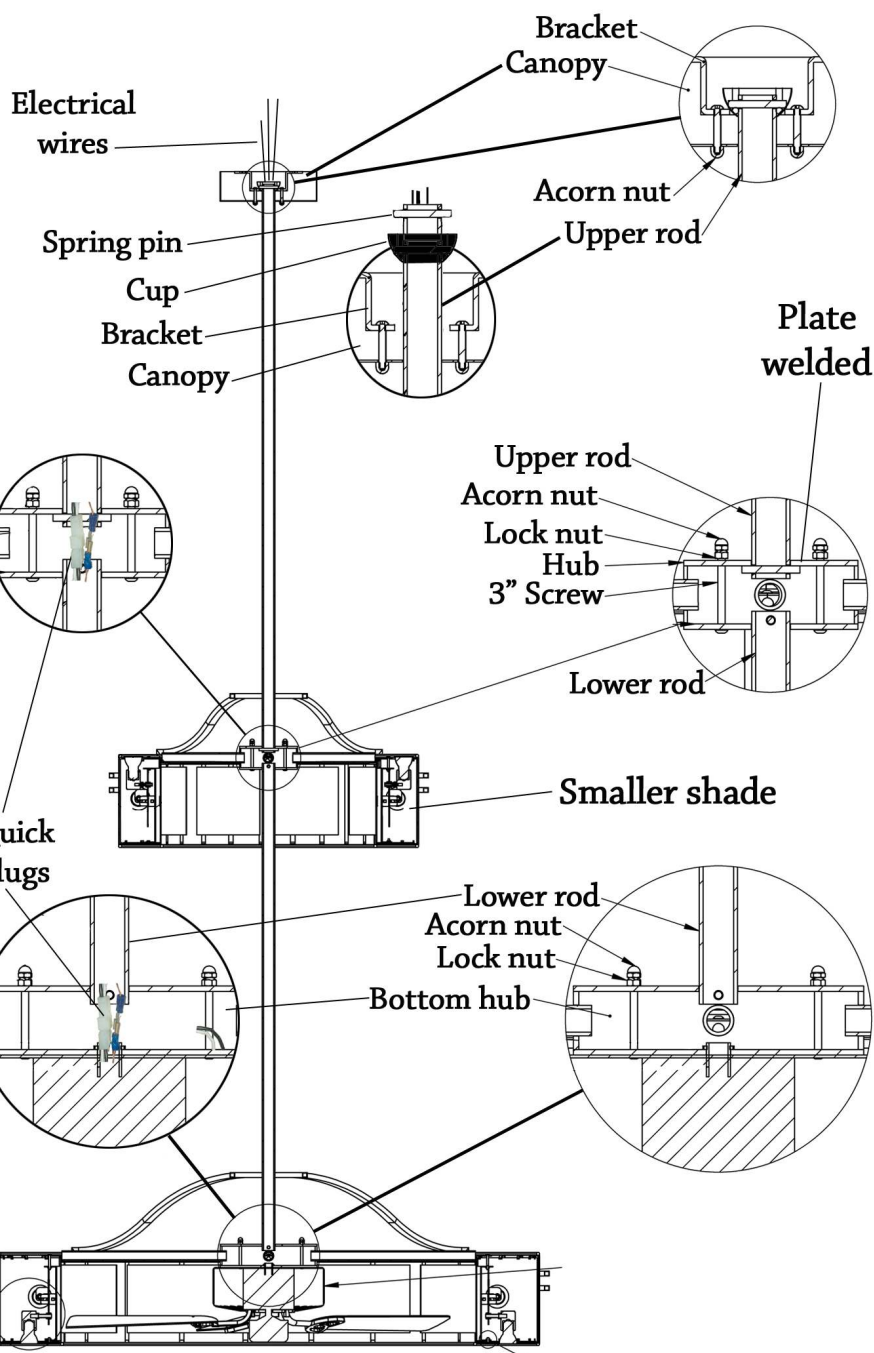

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

THIS FIXTURE WEIGHS OVER 50 LBS. NEC:314.27B, A luminaire that weighs more than 23kg (50lb) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM weight to be supported.

- 1.) Bring lower rod to fan shade and connect quick plugs. Lower the plate, welded to the bottom of lower rod, onto bottom hub. Secure together by screwing the lock nut and acorn nut onto the screws pointing up out of hub.
- 2.) Place smaller shade onto the lower rod, allowing wires and quick plugs to enter through the smaller shade's hub. Secure shade by screwing nuts onto donut shaped plate within the hub.
- 3.) Bring upper rod to middle shade and connect quick plugs. Place the upper rod's welded plate onto the smaller shade's hub. Secure together by screwing the lock nut and acorn nut onto the screws pointing up out of hub.
- 4.) Place canopy onto the upper rod followed by the cup. Place spring pin into the top of the upper rod. Slide cup up to nest the spring pin.
- 5.) Attach Bracket to ceiling, place cup into the center of bracket. Connect all electrical wires as per your local codes. Slide canopy up the rod and secure flush to ceiling by screwing the acorn nuts provided onto the bolts pointing down from bracket. Bulb your fixture, (bulbs provided by others), power on, enjoy your new fixture!



"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00a.m - 6:00p.m ET

visit us on the web at www.meyda.com