


ASSEMBLY INSTRUCTIONS FOR #176848

Fig.1

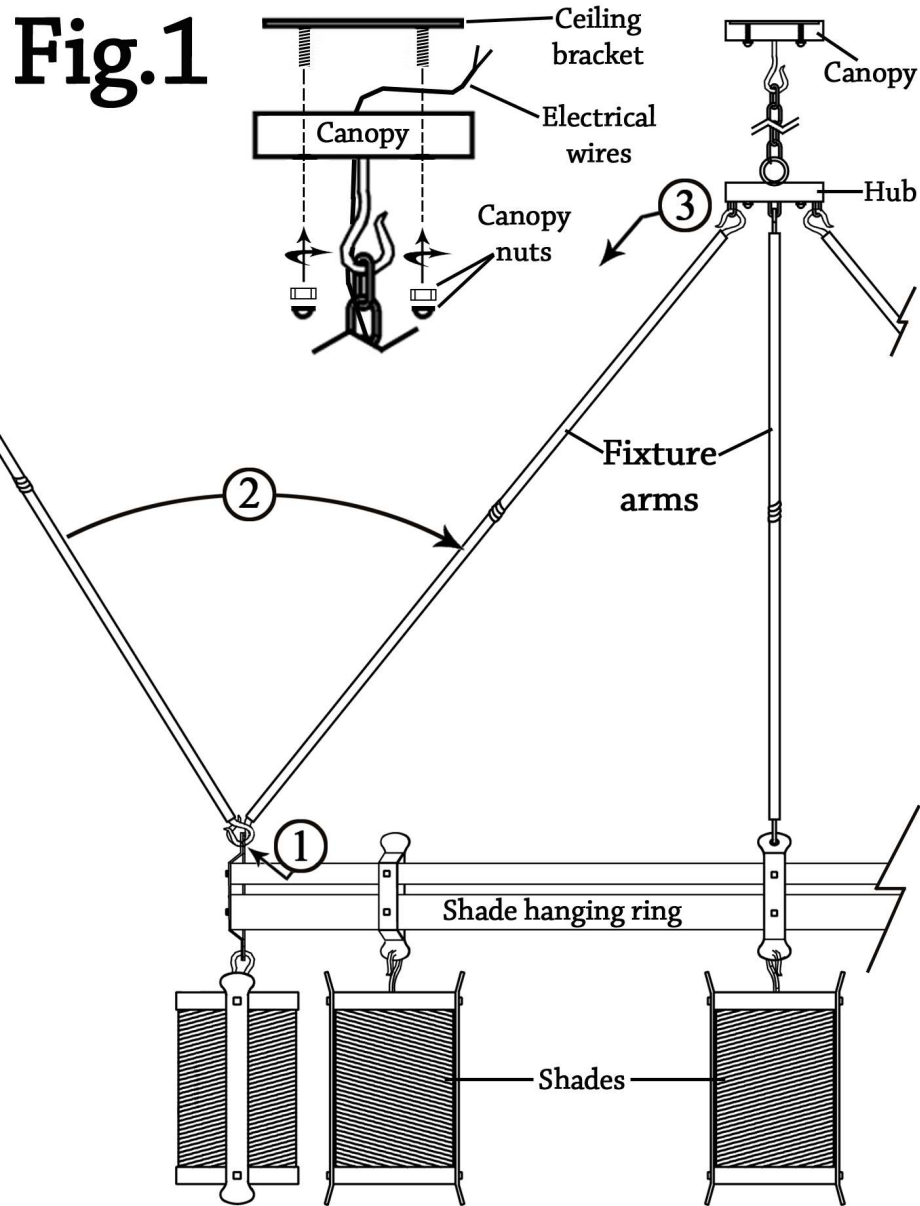

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

- 1.) Attach your ceiling bracket to ceiling. Determine the amount of chain you will need and add it to the canopy. Raise canopy to ceiling and attach electrical wires to power source as per your local electrical codes. Secure canopy flush to ceiling by sliding canopy up onto ceiling bracket bolts. Screw the canopy nuts provided onto the bolts. (Fig.1)
- 2.) Attach arms to your shade hanging ring: Step 1; Slide bottom of arm's hook through the ring's loop, so that the hook points out away from fixture. Pivot the arm back towards the center of fixture (step 2). Send the top of the arm's hook through the hub loop (step 3). Repeat this process for the other three arms. (Fig.1)
- 3.) Raise the hub & connect it to the chain, which is hanging from canopy. (Fig.1)
- 4.) Hook your shades onto the shade hanging ring. Connect all of your quick plugs (Fig.2&3), from shade to hub. Within each shade ziptie the wires to the underside of the bar that crosses middle of shade & socket. (Fig.3)
- 5.) Bulb your fixture, (bulbs provided by others). Power on, enjoy your new fixture!

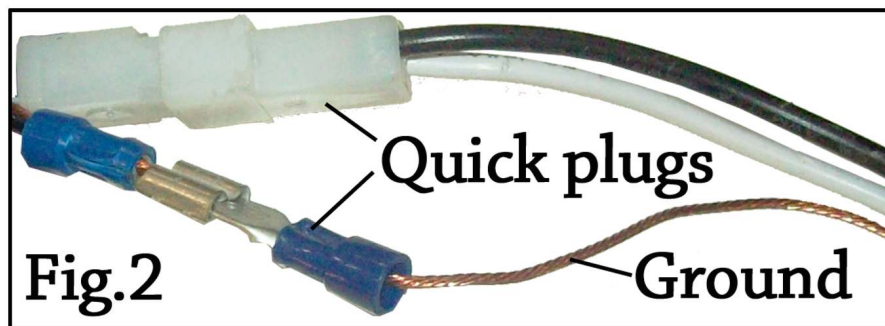


Fig.2


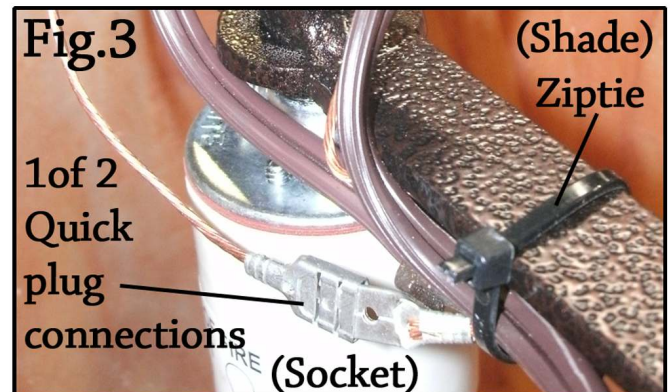


Fig.3



"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00a.m - 6:00p.m ET

visit us on the web at www.meyda.com