
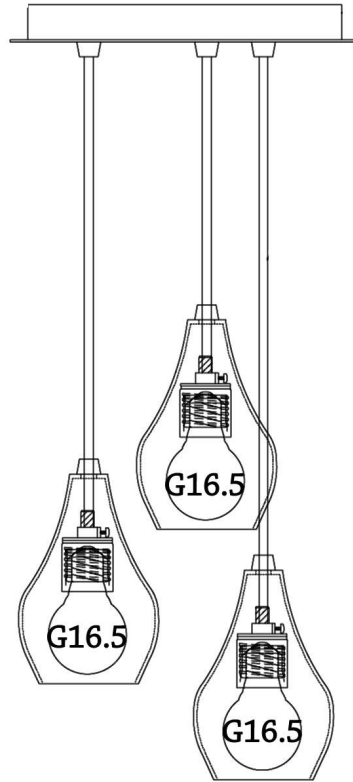


ASSEMBLY INSTRUCTIONS FOR # 177045


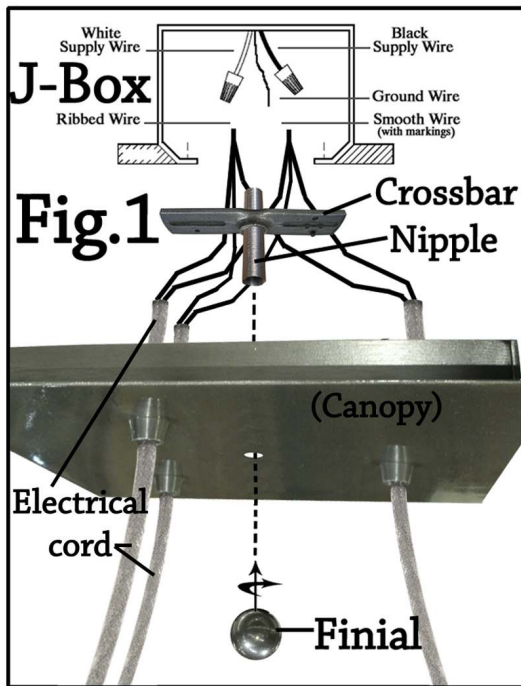


IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

- 1.) Attach crossbar to ceiling or J-Box. Crossbar should have a nipple pointing down ready to receive canopy. (Fig.1)
- 2.) Run your electrical cord through the canopy, when you are sure you have the height desired, squeeze your cord clamps onto cord. Squeeze till snug, but do not over tighten. You may tie a temporary knot to adjust heights. (Fig.2)
- 3.) Bring canopy/fixture to ceiling, connect all electrical wires as per your local codes.
- 4.) Slide canopy up onto the crossbar's nipple, through the center of canopy. Secure fixture flush to ceiling by screwing finial onto nipple. (Fig.1)
- 5.) Bulb your fixture, (bulbs not included). See drawing of fixture for suggested bulbs. Power on, enjoy your new fixture!

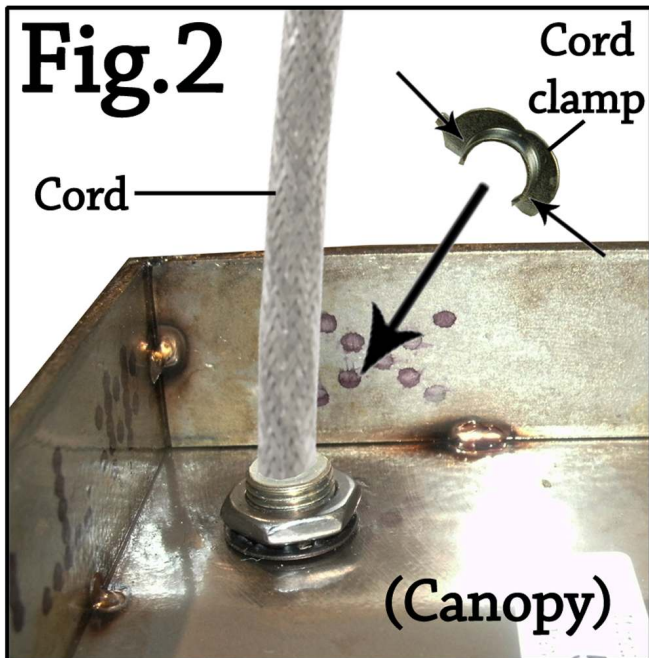

"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00a.m - 6:00p.m ET

visit us on the web at www.meyda.com