







# ASSEMBLY INSTRUCTIONS FOR #177979

## IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

- 1.) Construct fixture: Place arms into the arm holes on the two hub halves. Secure them in place by placing the lock washer onto the arm's nipple and screw the nut onto nipple. (Fig.1) Connect the quick plugs (Fig.5&2) from the top half of the globe hub to the bottom half's quick plugs. Then slide bottom half up onto threaded rod. Let the rod penetrate center of bottom half and secure together by screwing the finial onto the threaded rod. (Fig.2).
- 2.) Run your electrical wire (which is coming out of the globe hub) up the length of threaded rod and stem. Screw the threaded rod into the coupler sitting on top of globe hub. Slide stem down to sit within the check ring. (Fig.3)
- 3.) Place screw collar onto stem followed by the canopy. Screw a nut onto the threaded rod followed by the crossbar and then another nut. Screw nuts towards the crossbar to lock crossbar into position. (Fig.4)
- 4.) Raise fixture to ceiling and connect crossbar to secure location in ceiling. Connect all electrical wires as per your local codes. Slide canopy up to ceiling, and secure flush to ceiling by sliding screw collar up to meet canopy, & then tighten set screw. (Fig.4)
- 5.) Bulb your fixture, (bulbs provided by others), power on, enjoy your new fixture!

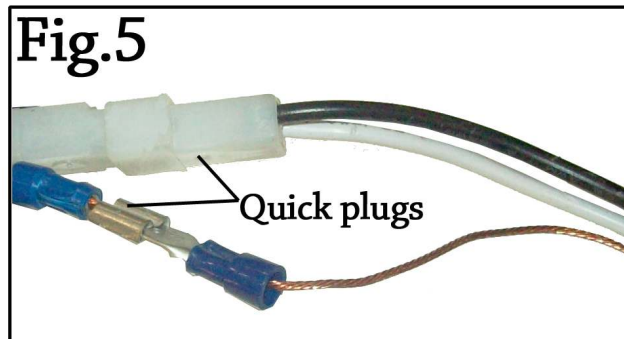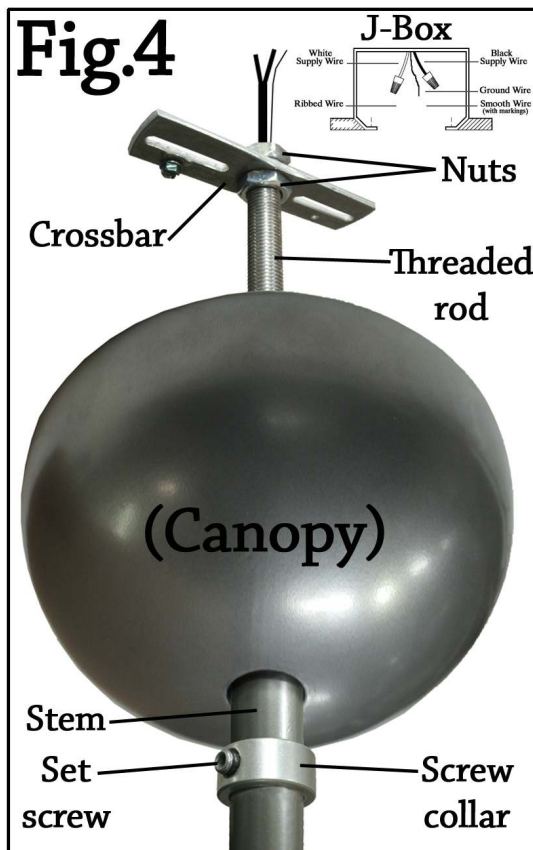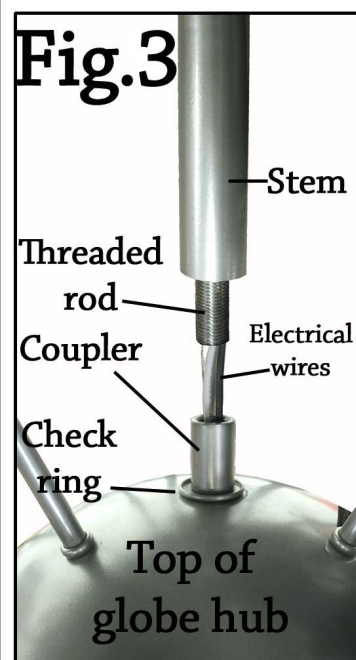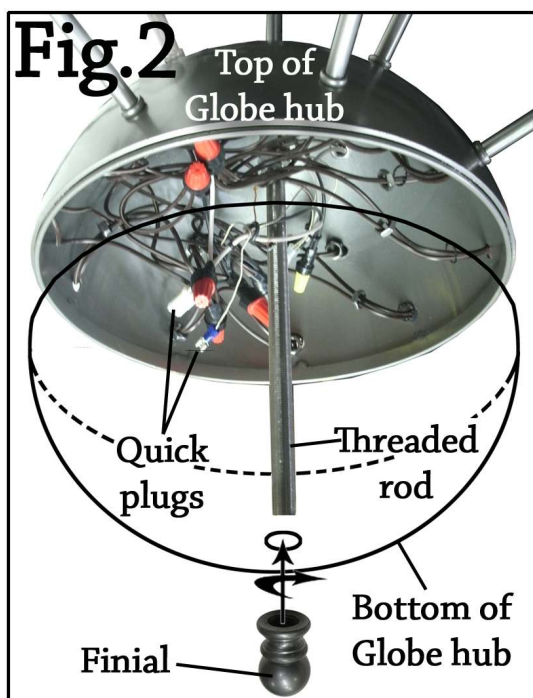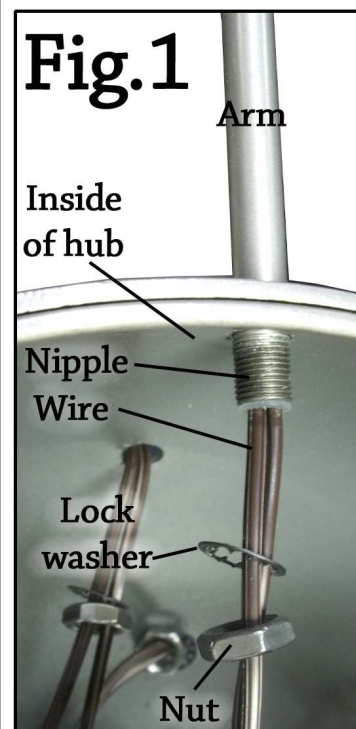

*"A Commitment to Excellence in Lighting and Service"*

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00a.m - 6:00p.m ET

visit us on the web at [www.meyda.com](http://www.meyda.com)