
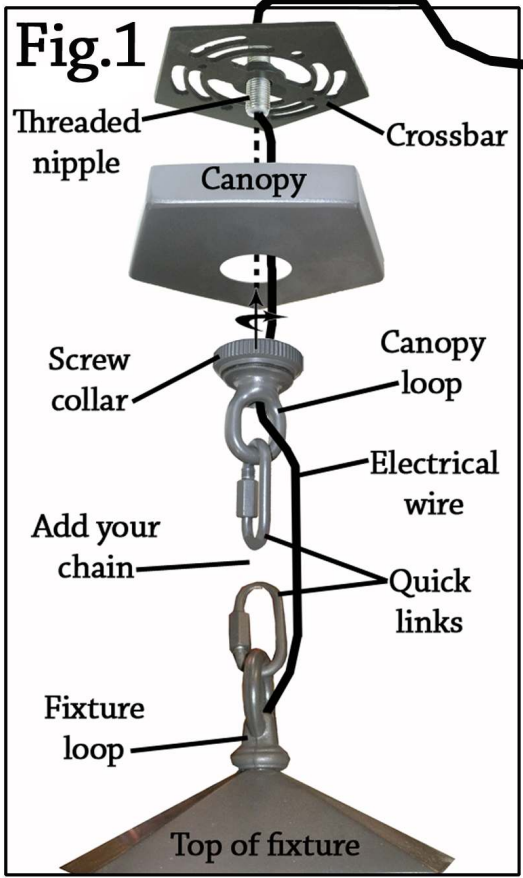



ASSEMBLY INSTRUCTIONS FOR #178527



IMPORTANT
 TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

- 1.) Unscrew the screw collar off of the canopy loop. Screw the threaded nipple into the canopy loop and then canopy loop & nipple gets screwed into the center of crossbar. Attach crossbar to ceiling. (Fig.1)
- 2.) Unscrew the screws around bottom of hub, allowing the hub cap to slide down out of hub. Reach in for the wire corresponding to the arm you will work with. Gently pull the wire through arm, while you hook the arm's hook onto the shade's loop. Repeat this process for other arms. Stuff the wires up into the hub. Replace hub cap and screw the screws back in to the hub & cap. (Fig.2)
- 3.) Using the quick links, add chain to top of fixture. Slip onto the chain, the screw collar, and then canopy. Connect top of chain to the canopy loop. (Fig.1)
- 4.) Run your electrical wire through the screw collar, canopy and then up the length of chain, then through the canopy loop. Connect all electrical wires to power source, as per your local codes. Slide canopy and screw collar up the length of the chain. Screw the collar onto the canopy loop thus making the canopy flush to ceiling. (Fig.1)
- 5.) Bulb, (bulbs provided by others), power on, enjoy your new fixture!

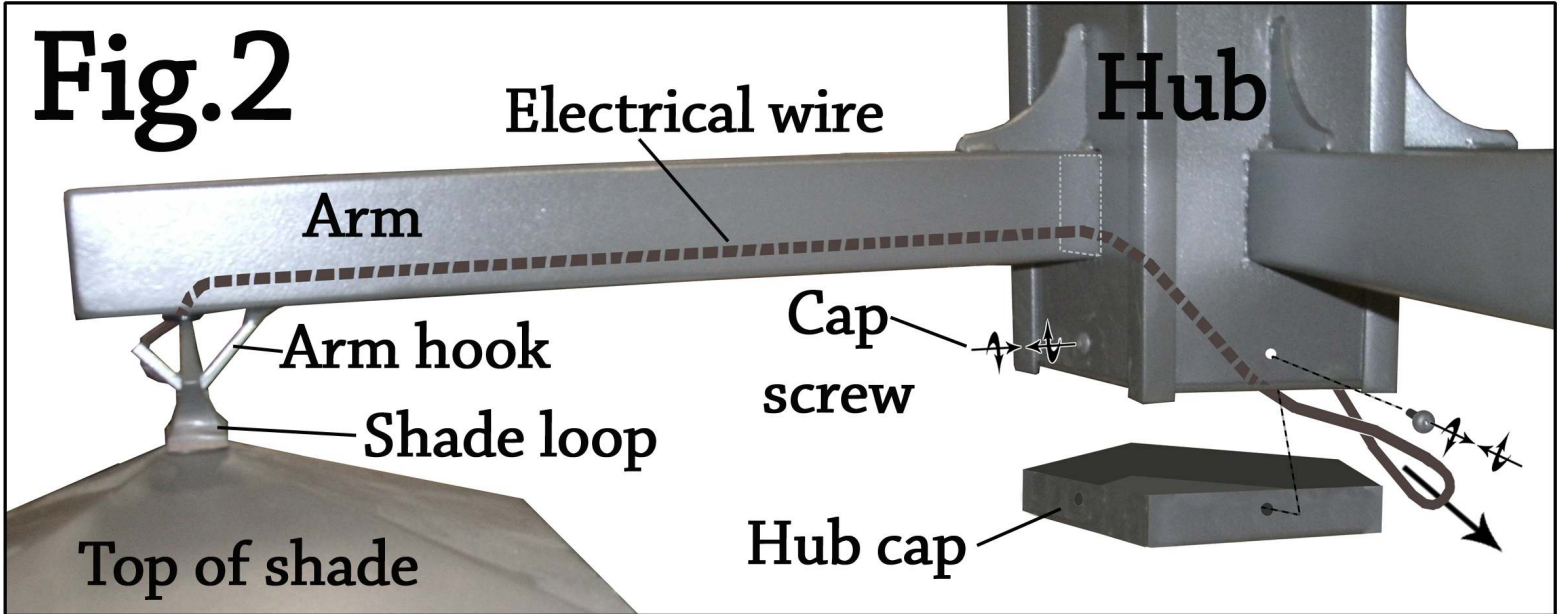

"A Commitment to Excellence in Lighting and Service"
 CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009
 MONDAY - FRIDAY 8:00a.m - 6:00p.m ET
 visit us on the web at www.meyda.com