
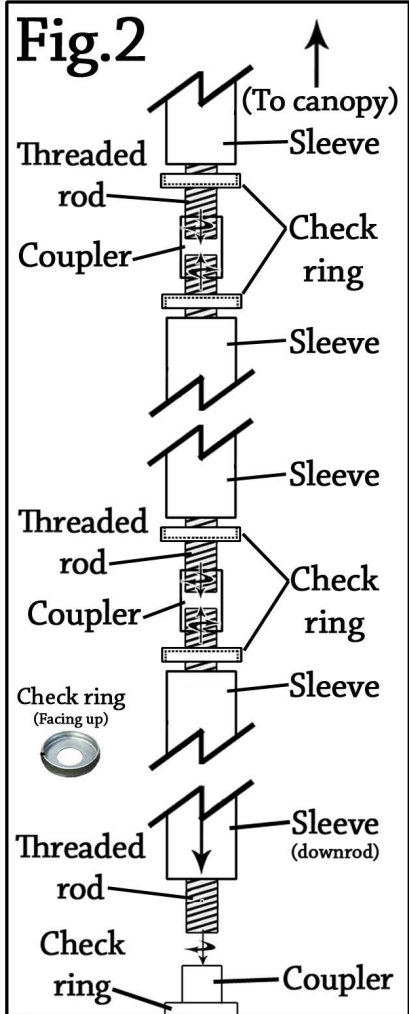





NEC:314.27B, A luminaire that weighs more than 23kg (50lbs.) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM WEIGHT to be supported.

ASSEMBLY INSTRUCTIONS FOR #179674

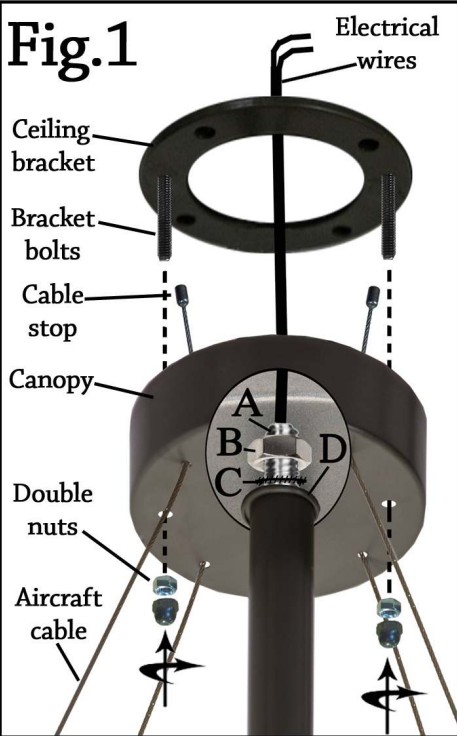

(Top of light cluster)

(Under light cluster)

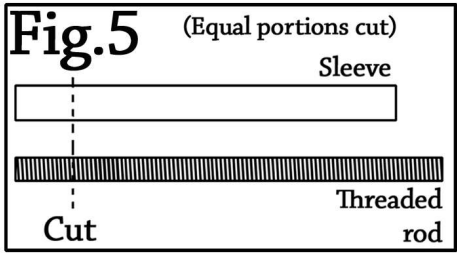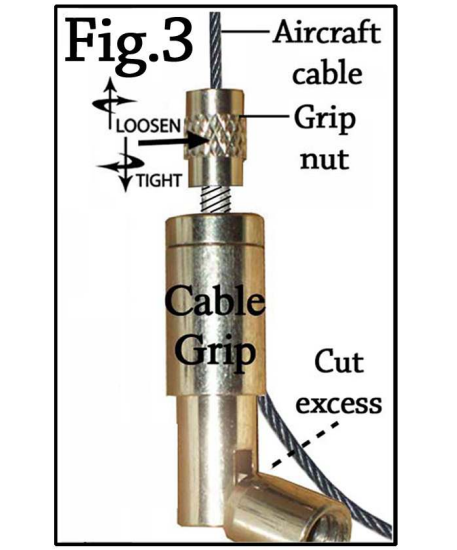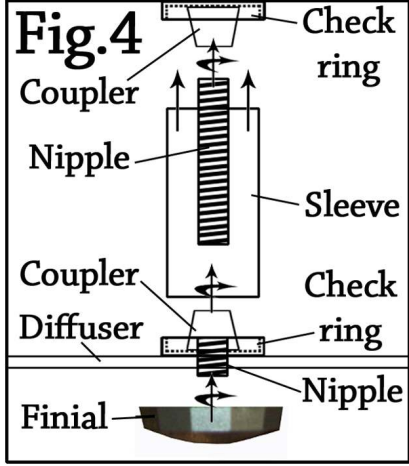

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

- 1.) Attach ceiling bracket to ceiling. (Fig.1)
- 2.) See Fig.2: Assemble the downrod: Feed the wire up through your pipe sections as you add them. 2a. Begin by screwing threaded rod into coupler located on top of light cluster. 2b. Slide sleeve onto threaded rod so that it rests within the check ring. 2c. Place another check ring (facing down) on top of the sleeve, capping it off. 2d. Screw a coupler onto the top of the threaded rod so that rod penetrates coupler half way. 2e. Screw another threaded rod into the coupler. Add another check ring (facing up), so that it rests upon the last check ring. Repeat process starting with 2b. Add as many sections as needed for desired height. If field cutting the downrod, cut equal portions off of threaded rod and sleeve. (Fig.5)
- 3.) See Fig.1: Attach canopy to downrod: the top sleeve should be capped off with a check ring(D), followed by the canopy, lock washer(C). Secure together by screwing nut(B) onto threaded rod(A). Run your aircraft cables through the four small holes in canopy so that the cable stops rest within the canopy. Bring canopy/downrod to power supply point and connect electrical wires as per your local electrical code. Slide canopy up onto the two bracket bolts, and secure canopy flush to ceiling by screwing the two double nuts onto the two bolts.
- 4.) See Fig.3: Unscrew the grip nut (not all the way). When you push down on grip nut, cable will pass through freely. Let go of grip nut and it will grip. Raise your metal ring to the aircraft cables, and send cables through cable grips until ring is at desired height. Once height is obtained, screw grip nuts back down. You may cut excess cable only when you are sure of height.
- 5.) Bulb your fixture, (bulbs provided by others). Attach diffuser: Under the light cluster, Screw the longer nipple into the coupler. Slide sleeve up into the check ring. Screw the other coupler onto the other end of the longer nipple. The smaller nipple should screw into the other side of the second coupler. Cap this off with another check ring (facing up), follow with the diffuser, and secure together by screwing finial onto the small nipple. (Fig.4)
- 6.) Power on, enjoy your new fixture!



"A Commitment to Excellence in Lighting and Service"
 CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009
 MONDAY - FRIDAY 8:00a.m - 6:00p.m ET
 visit us on the web at www.meyda.com