
NEC:314.27B, A luminaire that weighs more than 23kg (50lbs.) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM WEIGHT to be supported.

ASSEMBLY INSTRUCTIONS FOR #180825

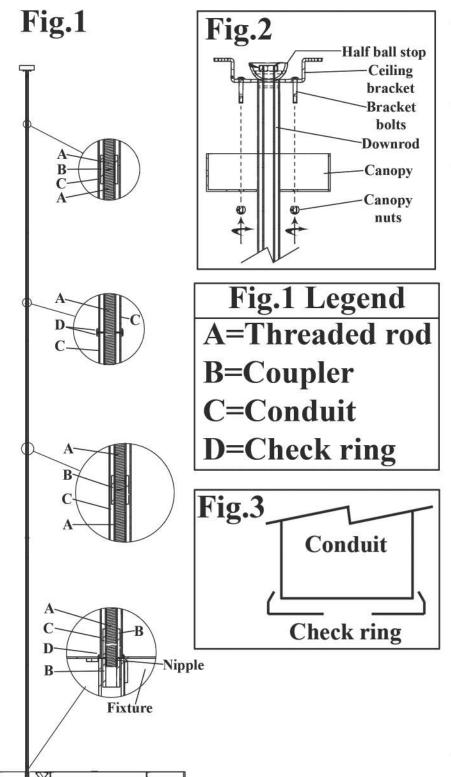

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

1.)On your fixture we have screwed a nipple into the coupler(B). Onto this you will place a check ring(D) (as in Fig.3). Screw a coupler onto this nipple. Screw your threaded rod(A) into the second coupler (B) as seen at the bottom of Fig.1. Place onto that a check ring (D). Slide conduit(C) onto the threaded rod so that it rests within check ring as seen in Fig.3. When encountering a break in the threaded rod you will connect rod to the next threaded rod using couplers (B) provided. When encountering a break in conduit, you will connect the conduit to the next one by placing check ring on top of the conduit (facing down, opposite of Fig.3's check ring). Then you will place another check ring (D) on top of the first check ring (facing up). Slide the conduit onto the threaded rod, so that it rests within the check ring. (Fig.1 & Fig.1 Legend) Slide canopy onto the down rod before half ball stop is connected.

- 2.) Attach the ceiling brackets to ceiling, be sure there is two bolts pointing down ready to receive canopy. Lift fixture to ceiling. Hook the half ball stop into the ceiling bracket so that it nests within the ceiling bracket. (Fig.2)
- 3.)Connect all electrical wires as per your local electrical code. Connect the safety cable to a secure location in ceiling. Slide canopy up onto the two bracket bolts, and secure canopy flush to ceiling by screwing the canopy nuts onto the two bracket bolts. (Fig.2)
- 4.)Bulb your fixture now, (bulbs provided by others). Power on, enjoy your new fixture!



"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009 MONDAY - FRIDAY 8:00a.m - 6:00p.m ET visit us on the web at www.meyda.com