


THIS FIXTURE WEIGHS OVER 60 LBS.

0700 11/17/16

NEC:314.27B, A luminaire that weighs more than 23kg (50lbs.) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM WEIGHT to be supported.

ASSEMBLY INSTRUCTIONS FOR #182102

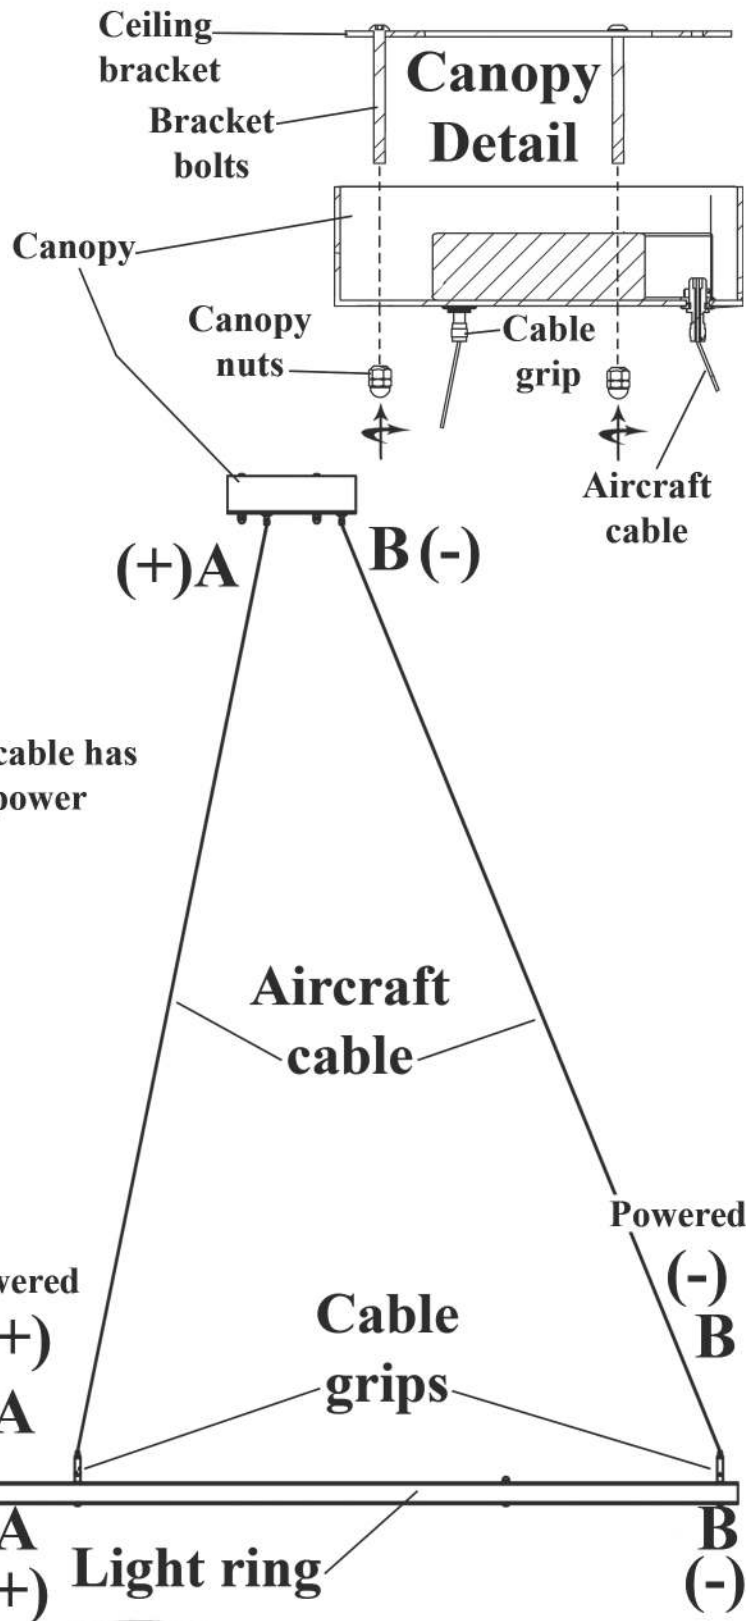


IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

- 1.) Attach ceiling bracket to ceiling. Be sure there is bracket bolts pointing down ready to receive canopy. (Canopy Detail)
- 2.) Aircraft cables should be attached to canopy. Bring canopy to ceiling and connect electrical wires as per your local electrical code. Slide canopy up onto the ceiling bracket bolts, and secure canopy flush to ceiling by screwing the canopy nuts onto the bracket bolts.
- 3.) Raise light ring to aircraft cables. Each powered cable has been labeled to match a label on the light ring. Connect aircraft cables to their corresponding labeled cable grips. You must unscrew the grip nut, but not all the way. Once the grip nut is loosened, push it back towards the cable grip body. In this way the cable will pass freely through the cable grip. Let go of the grip nut and it will grip the cable. Once you are sure of the length, screw the grip nut back down. Once you are absolutely sure of length you may cut excess cable. (Grip Detail)
- 4.) Power on, enjoy your new fixture!

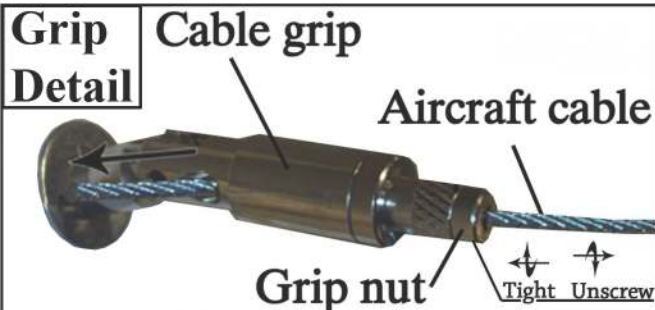

"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00a.m - 6:00p.m ET

visit us on the web at www.meyda.com