


THIS FIXTURE WEIGHS OVER 236 LBS.


0700 12/20/16

NEC:314.27B, A luminaire that weighs more than 23kg (50lbs.) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM WEIGHT to be supported.

ASSEMBLY INSTRUCTIONS FOR #187057

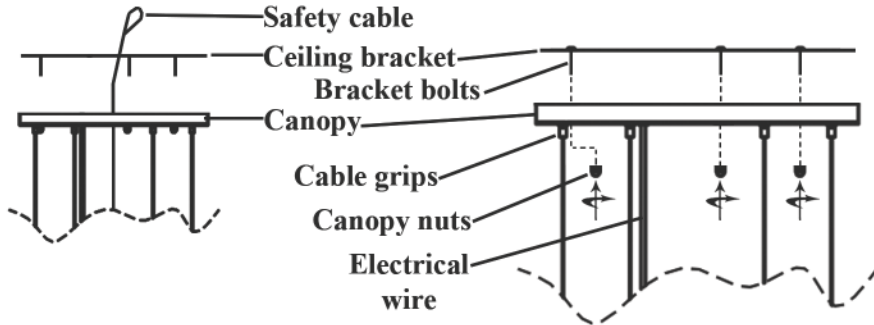

Canopy Detail

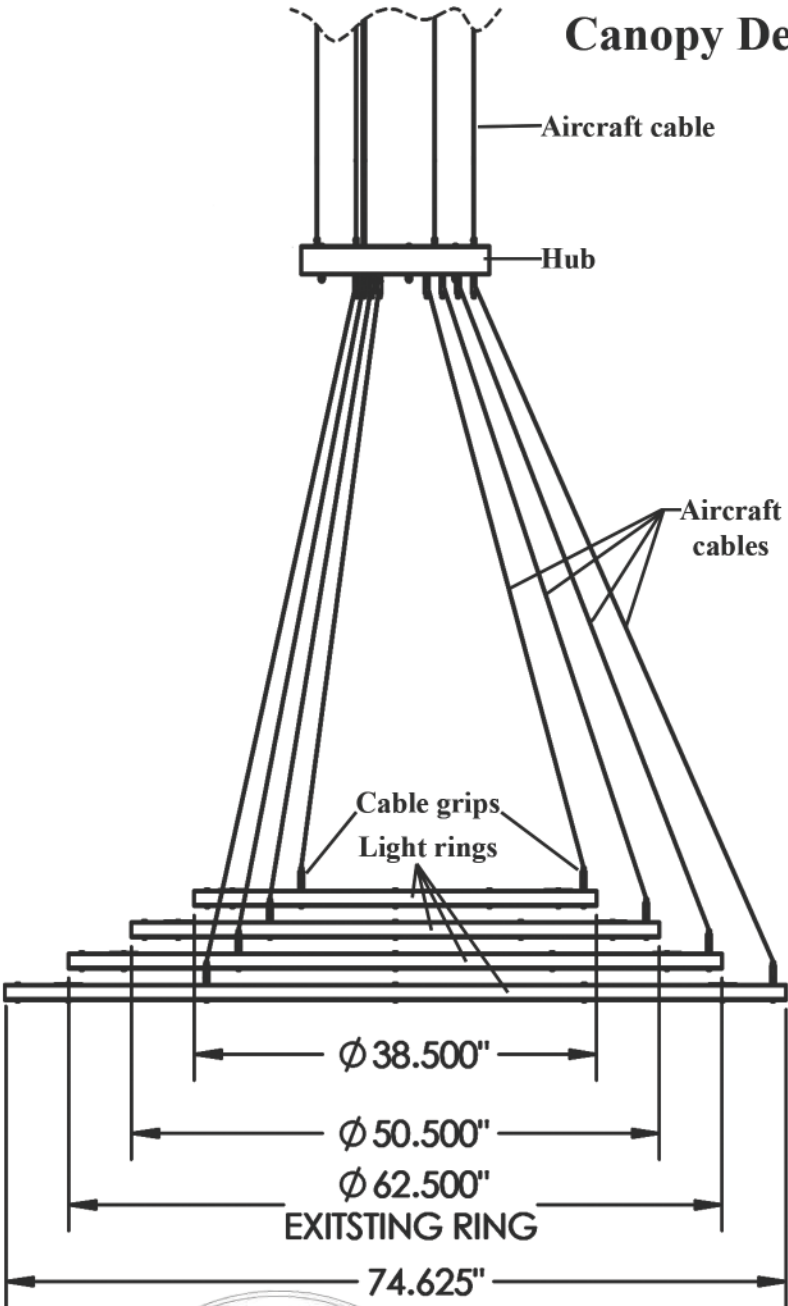


IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

- 1.) You will not use original canopy sent with 1st ring. You will also not use cables sent with 1st ring.
- 2.) Connect the hub to the canopy: The hub is already fitted with cables. On top of your hub there will be a ring of cables, you will attach these to your canopy cable grips. (Canopy Detail) Position the hub so that the hub's electrical wire will go straight up to electrical hole in canopy. The cable grips on the canopy work in the same manner as the cable grips that are on the light rings. Loosen the grip nut a little, not all the way, & push grip nut toward the grip body or in this case, push towards the canopy. In this position cable will pass freely, let go and cable grip will grip. Once satisfied with cable length screw grip nut back towards cable grip body, (towards the canopy). (Grip Detail) You may wish to "locktight" the cables at the canopy cable grips, be sure of length before you do this! Electrical wire will pass through hole on canopy near one of the aircraft cables. Safety cable will pass through the center of the canopy.
- 3.) Attach the ceiling bracket to the ceiling. Bring canopy/hub to ceiling and attach the safety cable to a secure location in ceiling. Keep in mind you are supporting 236 lbs. Next connect electrical wires as per your local electrical code. Slide canopy up onto the ceiling bracket and secure canopy flush to ceiling by screwing the canopy nuts onto the bracket bolts.
- 4.) Attach your light rings: Each ring will have cable grips marked + or -, turn rings so that the positive will line up with the + on canopy. Connect + with +, & - with -. Begin with the center ring, use the ring's cable grips in the same manner as the cable grips on the canopy. Adjust the rings as you see fit. Do not cut excess cable if you plan on adjusting rings dynamically in the future.
- 5.) Power on, enjoy your futuristic light fixture!

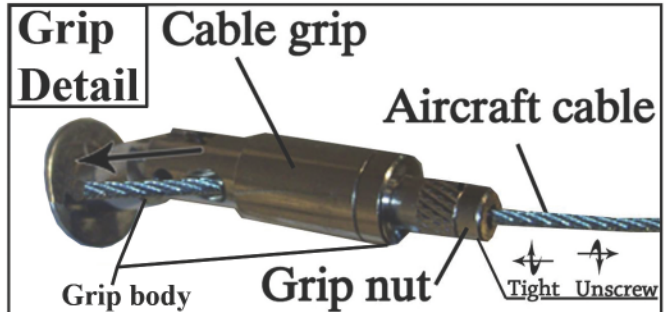

"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00a.m - 6:00p.m ET

visit us on the web at www.meyda.com