

INSTALLATION INSTRUCTIONS

FOR ITEM 188823

Meyda
CUSTOM LIGHTING

CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE. We recommend installation by a licensed electrician. This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.*

Caution: Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

FIXTURE COMPONENTS

1. CANOPY ASSEMBLY
2. 27"W RING
3. 43"W RING
4. 8" GLASS PANELS (QTY 63)
5. 7" GLASS PANELS (QTY 59)
6. 8-32 HEX NUTS (QTY 125)

Caution: Be sure power is off at the main breaker box prior to installation. Read all instructions in their entirety before beginning installation.


1. Carefully unpack all components and make certain that everything is accounted for.
2. Unscrew Acorn Nuts from bottom of Canopy to release Mounting Plate from Canopy Assembly.
3. Attach Mounting Plate to ceiling ensuring connection is suitable for a minimum of 80lbs.
4. Move fixture into approximate location for final installation and make electrical connection to Driver input wires (Brown is Line and Blue is Neutral) following all local codes and procedures.
5. For remote dimming, connect wires from Dimmer to Driver wires (Black is Positive and White is Negative)

****It is recommended to test for successful electrical connection before continuing. Power to LED strips runs through Aircraft Cables. Ensure cables are not touching when power is on.**

6. Attach Canopy to Mounting Plate by sliding Canopy over Studs from Mounting Plate and reattach Acorn Nuts. Tighten Acorn Nuts until Canopy is flush to ceiling.

7. Fixture is now safe to hang freely.

8. Set desired overall fixture height by adjusting length of Aircraft Cables. To shorten cables, loosen Nut on Gripper and push Wire into Gripper. To lengthen, loosen and depress Gripper Nut. Once depressed cable will extend freely through gripper.

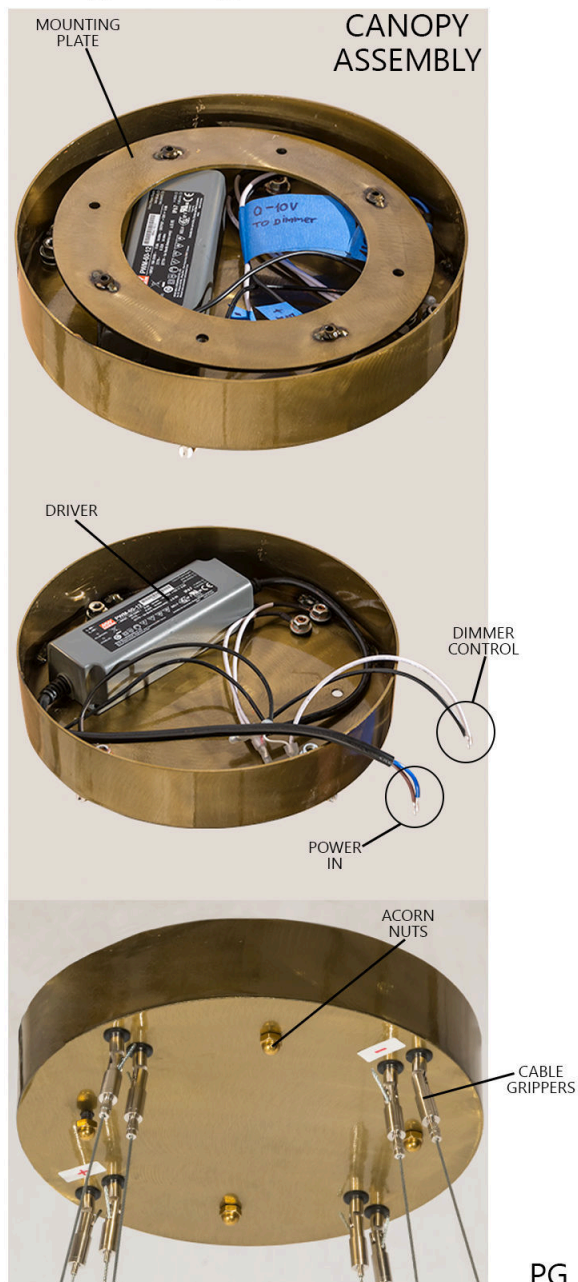

PG 1 OF 2

INSTALLATION INSTRUCTIONS

FOR ITEM 188823

Meyda
CUSTOM LIGHTING

CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE. We recommend installation by a licensed electrician. This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.*
Caution: Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

Caution: Be sure power is off at the main breaker box prior to installation. Read all instructions in their entirety before beginning installation.

****Do not remove Blue Tape from Rings until installation is complete. This will be used to align Inner Ring Covers to ensure a proper fit.**

9. Using 3-32 Allen Wrench, remove Button Head Screws from inner Ring Covers and set aside. Inner Covers on both Rings should be removed. This will expose Studs for attaching Glass Panels.

For proper glass spacing, some Studs will have preset Hex Nuts. Do not remove preset Hex Nuts.

10. 7" Glass Panels should be installed first. Hang 7" Panels onto all Studs WITHOUT preset Hex Nuts.

Once Panel is hanging, screw provided 8-32 Hex Nut onto stud.

****Do not tighten Nuts down onto Panels. Panels can break or will not hang straight if Nuts are too tight.****

11. Hang 8" Panels onto all Studs WITH preset Hex Nuts. Once Panel is hanging, screw provided 8-32 Hex Nut onto Stud.

****Do not tighten Nuts down onto Panels. Panels can break or will not hang straight if Nuts are too tight.****

12. Once all Glass Panels have been installed, reattach Inner Ring Covers using Button Head Screws. Cover for 27"W Ring should be installed from above. Cover for 43"W should be installed from below. To ensure a proper fit, line up Blue Tape on covers to Blue Tape on outside of Rings.

13. Power on and ENJOY!!

