

# INSTALLATION INSTRUCTIONS

FOR ITEM 202215 LOXLEY 36 LT TWO TIER CHANDELIER

*Meyda*  
CUSTOM LIGHTING

**CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE.** We recommend installation by a licensed electrician. This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.\*


**Caution:** Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

## FIXTURE COMPONENTS

1. CANOPY ASSEMBLY
2. CHAIN
3. HUB
4. ARMS
5. 42"W TOP TIER
6. ARMS
7. 72"W BOTTOM TIER
8. 3"W x 6"H GLASS SHADE (QTY 36)

### Caution:

**Fixture is OVERWEIGHT and not suitable for installation with standard Junction Box.**  
**Be sure power is off at the main breaker box prior to installation.**  
**Read all instructions in their entirety before beginning installation.**

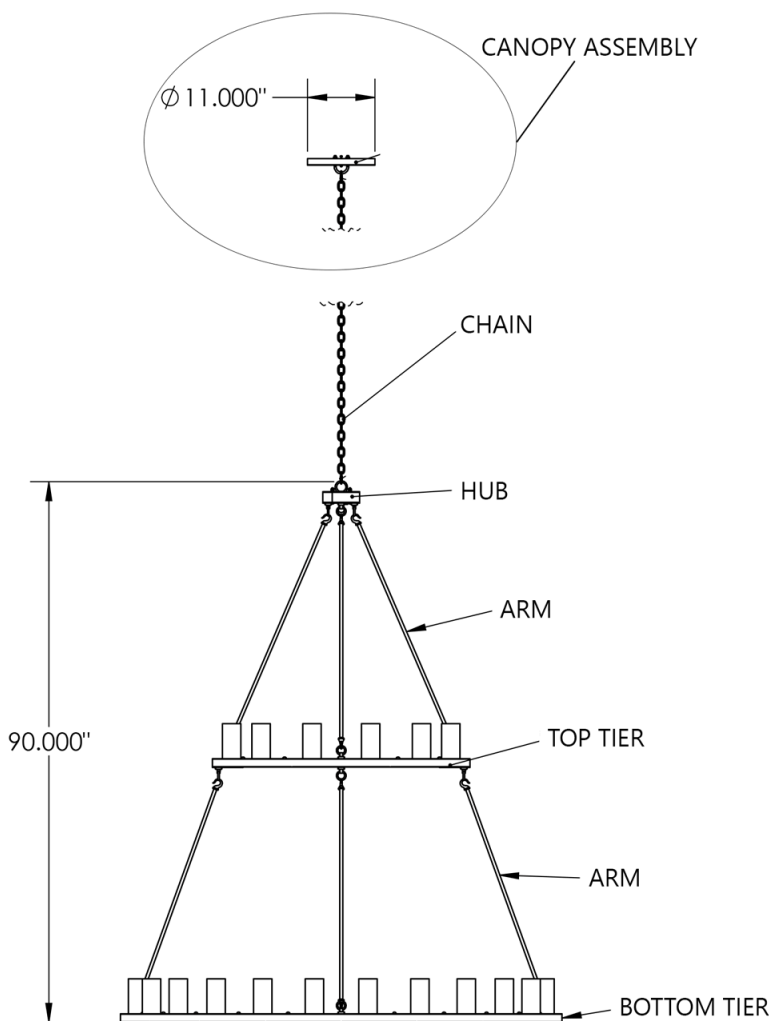

# INSTALLATION INSTRUCTIONS

FOR ITEM 202215 LOXLEY 36 LT TWO TIER CHANDELIER

*Meyda*  
CUSTOM LIGHTING

**CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE.** We recommend installation by a licensed electrician. This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.\*

**Caution:** Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

## **Caution:**

**Fixture is OVERWEIGHT and not suitable for installation with standard Junction Box. Be sure power is off at the main breaker box prior to installation. Read all instructions in their entirety before beginning installation.**

1. Carefully unpack all components and ensure that everything is accounted for.
2. Remove Acorn Nuts from Canopy Assembly to release Mounting Plate. Reserve Nuts for later use.
3. Affix Mounting Plate to blocking independent of J-Box ensuring that connection is suitable to hold a minimum of 150lbs and that Electrical Supply Wires remain accessible.
4. Unravel Fixture Lead Wires and Safety Cable from top of Hub and attach desired length of Chain to Quick Link on Hub.
5. Weave Lead Wires and Safety Cable through every 3rd Link of Chain.
6. Slide Canopy over Chain, Lead Wires, & Safety Cable and allow to rest on top of Hub.
7. Hang Hub from Mounting Plate by attaching loose end of Chain to Quick Link on Mounting Plate Loop.
8. Secure Safety Cable to Structure ensuring that connection is suitable to hold a minimum of 150lbs.
9. Make electrical connection from Fixture Lead Wires to Structure Supply Wires following all Local Codes and Procedures.
10. Slide Canopy up Chain and over Mounting Plate, allowing Studs to protrude through. Secure using Acorn Nuts.
11. Hang Arms from vacant Loops on Hub.
12. Hang 42"W Top Tier from Arms ensuring to align powered Arms with Electrical Receptacles on Tier. Make Connections.
13. Attach Arms to vacant Loops on Top Tier.
14. Hang 72"W Bottom Tier from Arms ensuring to align powered Arms with Electrical Receptacles on Tier. Make Connections.
15. Install 36 Candelabra Base 60Watt Bulbs(not included) into Sockets.
16. Set Glass Shades into Shade cups.
17. Power on and ENJOY!!!

