INSTALLATION INSTRUCTIONS

FOR ITEM 234417 TONGA CHANDELIER



CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE. We recommend installation by a licensed electrician.

This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.*

Caution: Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

FIXTURE COMPONENTS

- 1. CANOPY ASSEMBLY
- 2. 120" CHAIN
- 3. HUB
- 4. CHANDELIER BODY
- 5. CANDLE COVER (QTY 12)
- 6. U-BOLT & THIMBLE (QTY 2)

Caution:

Fixture is OVERWEIGHT and not suitable for installation with standard Junction Box.

Be sure power is off at the main breaker box prior to installation.

Read all instructions in their entirety before beginning installation.

1. Carefully remove all outer packing material from Crate and all 2x4s on top. Chains should be detached and carefully lowered into Crate. Black Straps can be removed as well.

DO NOT REMOVE CHANDELIER BODY FROM CRATE. IT SHOULD BE REMOVED FROM CRATE ONLY WHEN IT CAN BE LIFTED AND HUNG AS 1 ACTION.

- 2. Remove Box from inside Crate, open and review contents.
- 3. Unscrew Collar from Canopy Assembly to release Crossbar with attached Loop and Quick Link.
- 4. Affix Crossbar to ceiling ensuring that connection is suitable to hold a minimum of 200lbs and that Electrical Supply Wires remain accessible.
- 5. Attached desired length of Chain to Quick Link on Hub.
- 6. Weave Fixture Lead Wire and Safety Cable from Hub through every 5th Link of Chain.
- 7. Slide Screw Collar and Canopy over Chain, Cable, and Wire and allow them to rest on top of Hub.
- 8. Hang Hub by connecting loose end of Chain to Quick Link on Crossbar Loop.
- 9. Feed Safety Cable through Loop Channel and attach to secure location ensuring connection is suitable to hold minimum of 200lbs.
- 10. Feed Fixture Lead Wires through Loop Channel and, Following All Local Codes and Procedures, make connection from Fixture Lead Wires to Supply Wires.
- 11. Slide Canopy and Screw Collar up Chain and thread Collar onto Crossbar Loop until Canopy is snug to ceiling.
- 12. Lift Chandelier Body from Crate and hang from Hub by connecting loose ends of Chains to Hub Arms. Ensure to hang Fixture so that Power Cable from Hub will align with Power Receptacle on Body.
- 13. Weave Power Cable through Chain and connect to Receptacle on Chandelier Body.
- 14. Feed Safety Cables down through Hub and weave through Chains. Connect Cables to Loops on Chandelier Body using provided U-Bolts and Thimbles.
- 15. Slide Candle Covers over Sockets.
- 16. Install 12 Candelabra Base 60Watt Bulbs(not included) into Sockets.
- 17. Power on and ENJOY!!!

INSTALLATION INSTRUCTIONS

FOR ITEM 234417 TONGA CHANDELIER



CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL

INJURY OR DEATH AND PROPERTY DAMAGE. We recommend installation by a licensed electrician. This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.*


Caution: Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.


Caution:


Fixture is OVERWEIGHT and not suitable for installation with standard Junction Box.


Be sure power is off at the main breaker box prior to installation.

Read all instructions in their entirety before beginning installation.



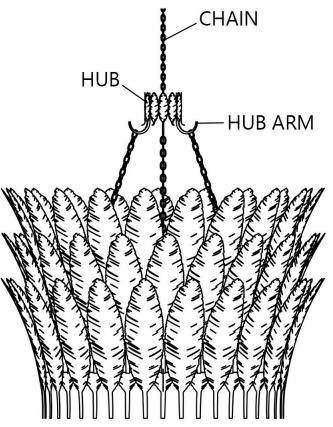

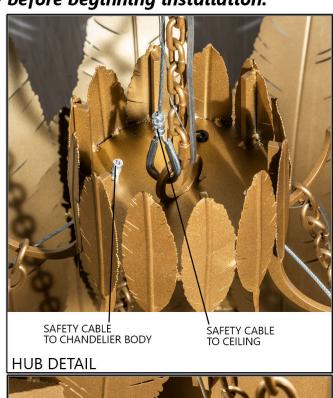

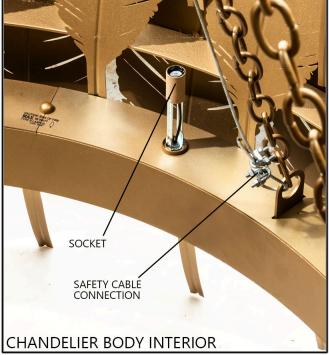

PG 2 OF 2