

INSTALLATION INSTRUCTIONS

FOR ITEM 250111 CILINDRO TWO TIER FLUSHMOUNT

Meyda
CUSTOM LIGHTING


CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE. We recommend installation by a licensed electrician. This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.*

Caution: Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

Caution:

Fixture is OVERWEIGHT and not suitable for installation with standard Junction Box. Be sure power is off at the main breaker box prior to installation. Read all instructions in their entirety before beginning installation.

1. Carefully unpack all components and make certain that everything is accounted for.
2. Affix Outer Shade to ceiling ensuring that connection is suitable to hold 55lbs.
3. Attach Inner Shade Suspension Rods(qty 4) to LED Plate. Remove Hex Nut and Spider Washer from Rods and feed exposed All-Thread through inner holes in LED side of Plate then secure with Spider and Hex Nuts opposite side of Plate.
4. Attach Diffuser Suspension Rod to LED Plate. Remove Hex Nut and Spider Washer from Rod and feed exposed All-Thread through center hole in LED side of Plate then secure with Spider and Hex Nut on opposite side of Plate.
5. Following All Local Codes and Procedures make connection from Driver Input Wires to Supply Wires. Fixture is Dimmable with compatible 0-10V Dimmer switch. If dimming is desired connect Dimming Wires from Driver to Wires from Dimmer Switch. Purple Driver Wire will connect to Positive Dimmer Wire and Gray Driver Wire will connect to Negative Dimmer Wire.
6. Using Customer Supplied Fasteners through outermost holes, affix LED Plate to ceiling. Ensure connection is suitable to hold a minimum of 110lbs.
7. Ensuring to align Shade Seams, lift Inner Shade up and connect to Suspension Rods. Secure with Hex Nuts.
8. Remove Diffuser Support Ring from bottom of Inner Shade. Lift Diffuser up to bottom of Shade allowing All-Thread from Diffuser Suspension Rod to pass through center. While continuing to support Diffuser, thread Finial onto exposed Thread and secure with Diffuser Support Ring.
9. Power on and ENJOY!!!

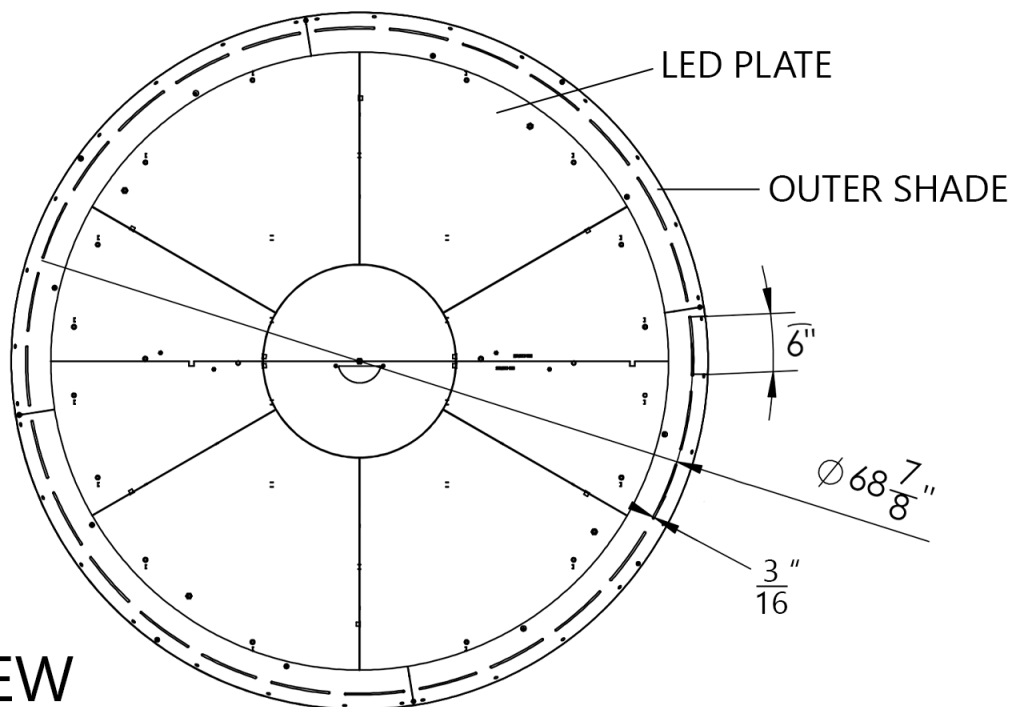

INSTALLATION INSTRUCTIONS

FOR ITEM 250111 CILINDRO TWO TIER FLUSHMOUNT

Meyda
CUSTOM LIGHTING

CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE. We recommend installation by a licensed electrician. This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.*

Caution: Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

Caution:

Fixture is OVERWEIGHT and not suitable for installation with standard Junction Box. Be sure power is off at the main breaker box prior to installation. Read all instructions in their entirety before beginning installation.

