## INSTALLATION INSTRUCTIONS

FOR ITEM 260411 (27" Wide Cypola Semi-Flushmount)



CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL

**INJURY OR DEATH AND PROPERTY DAMAGE.** We recommend installation by a licensed electrician.

This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.\*

Caution: Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.


## FIXTURE COMPONENTS


- 1. CANOPY
- CROSSBAR W/STUDS
- 3. ARMS
- 4. BOWI
- 5. BOWL CAP
- 6. HALF BRASS BALL

## Caution:

Be sure power is off at the main breaker box prior to installation. Read all instructions in their entirety before beginning installation.

- 1. Carefully unpack all components and make certain that everything is on hand.
- 2. Remove Brass Balls from Canopy to release Crossbar. Reserve Brass Balls for later use.
- 3. Affix Crossbar to Junction Box ensuring connection is suitable to hold a minimum of 20 lbs. and that Electrical Supply Wires remain accessible.
- 4. Following All Local Codes and Procedures, make connection from Fixture Lead Wires to Supply Wires.
- 5. Resecure the Canopy onto the Crossbar using the Balls from before.
- 6. Install 5 X 60W E26 A19 Bulbs (not included) into Sockets.
- 7. Hang Arms from Hooks on Canopy.
- 8. Hang the Bowl from the Arms allowing Threaded Rod to protrude through Bowl.
- 9. Secure the Bowl using Bowl Cap and Half Brass Ball.
- 10. Power on and FNJOY!!!

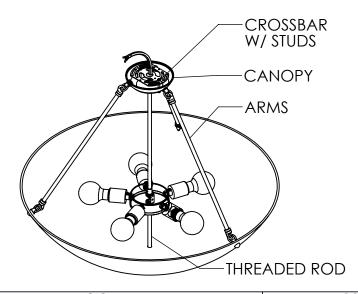

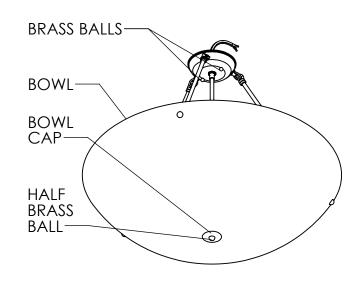

MEYDA.COM 1.800.222.4009 SALES@MEYDA.COM